



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
TMR-Okeechobee [716012]
Machine Id
434166 VOLVO L180H 4821
Component
Rear Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449954	VCP445662	VCP424869
Sample Date		Client Info		18 May 2024	12 Feb 2024	23 Jan 2024
Machine Age	hrs	Client Info		16357	15531	15313
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	64	26	46
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	<1	0
Aluminum	ppm	ASTM D5185m	>30	2	1	2
Lead	ppm	ASTM D5185m	>50	<1	1	0
Copper	ppm	ASTM D5185m	>120	15	8	13
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	20	13	13
Potassium	ppm	ASTM D5185m	>20	3	2	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ HEAVY	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	0
Boron	ppm	ASTM D5185m		191	117	131
Barium	ppm	ASTM D5185m		0	0	<1
Molybdenum	ppm	ASTM D5185m		9	6	3
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		83	55	28
Calcium	ppm	ASTM D5185m		5521	3445	3670
Phosphorus	ppm	ASTM D5185m		1791	1185	1295
Zinc	ppm	ASTM D5185m		2260	1505	1519
Sulfur	ppm	ASTM D5185m		5920	3880	5910
Visc @ 40°C	cSt	ASTM D445	55	42.9	47.6	42.2

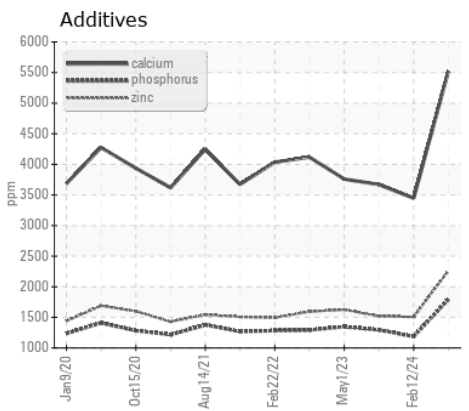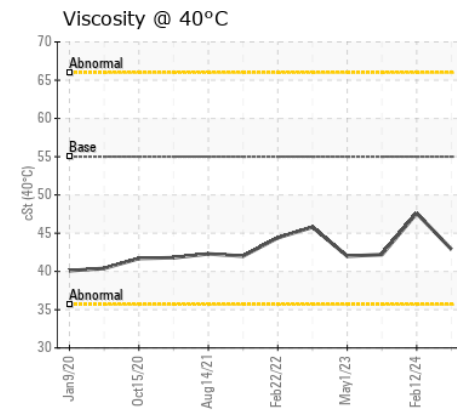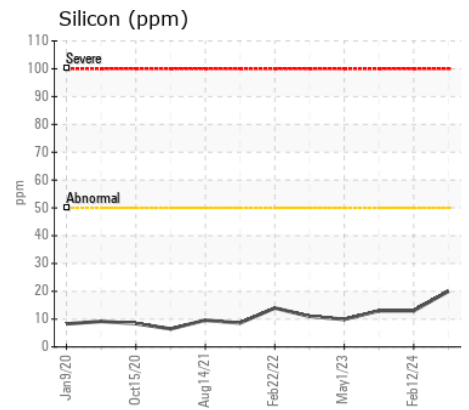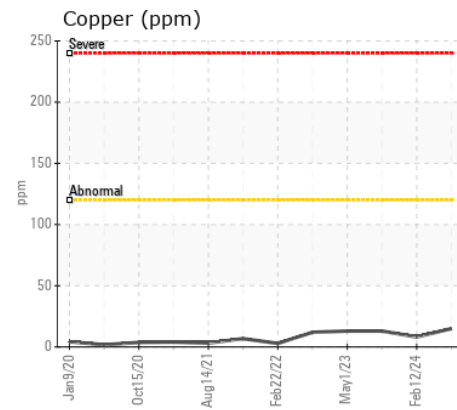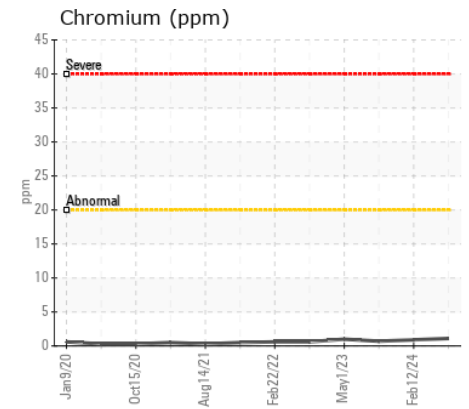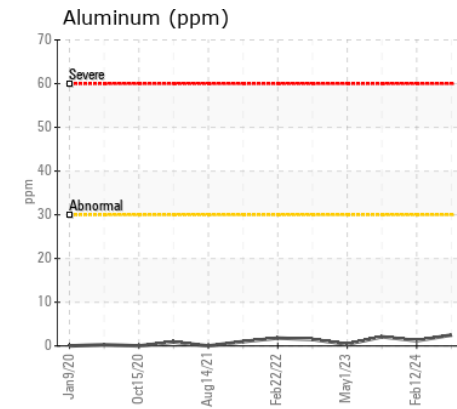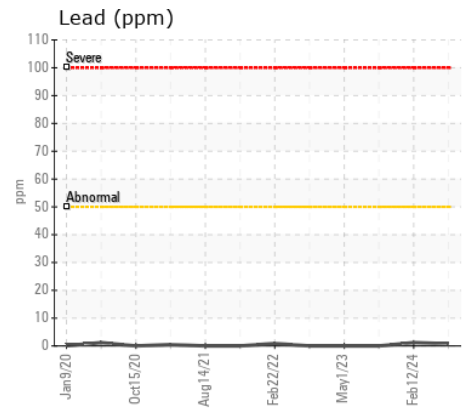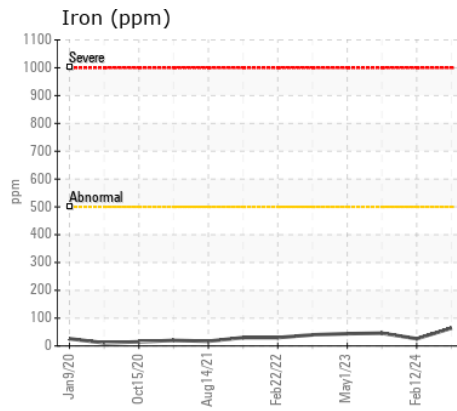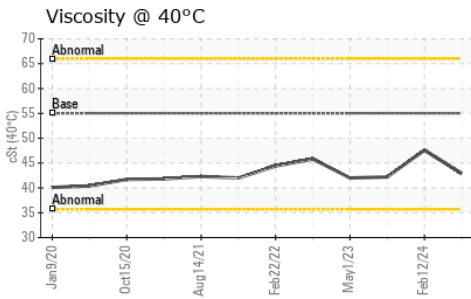

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP449954
Lab Number : 06192559
Unique Number : 11049311
Test Package : MOB 1

Received : 28 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Don Baldrige

TRADEMARK METALS RECYCLING - OKEECHOBEE
 9800 NE 128TH AVE
 OKEECHOBEE, FL
 US 34972
 Contact: RYAN BOWDEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (863)467-9810

F: (863)467-9814