



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[A12575]
 Machine Id
VOLVO L120H 633530
 Component
Rear Axle
 Fluid
MOBIL WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP425970	---	---
Sample Date		Client Info		22 May 2024	---	---
Machine Age	hrs	Client Info		1000	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	142	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>120	1	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	30	---	---
Potassium	ppm	ASTM D5185m	>20	9	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		150	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		17	---	---
Manganese	ppm	ASTM D5185m		7	---	---
Magnesium	ppm	ASTM D5185m		8	---	---
Calcium	ppm	ASTM D5185m		4127	---	---
Phosphorus	ppm	ASTM D5185m		1351	---	---
Zinc	ppm	ASTM D5185m		1630	---	---
Sulfur	ppm	ASTM D5185m		6061	---	---
Visc @ 40°C	cSt	ASTM D445		62.7	---	---

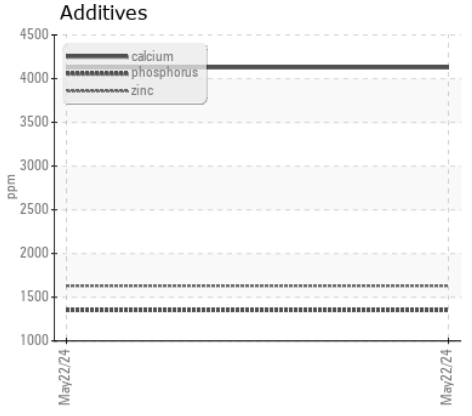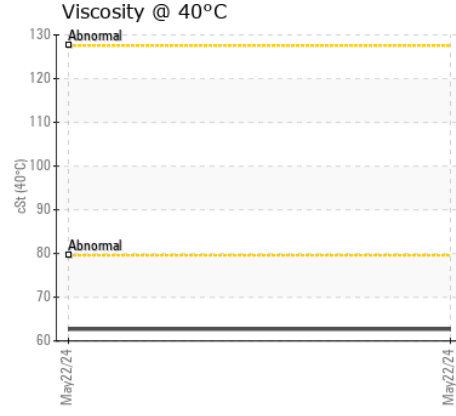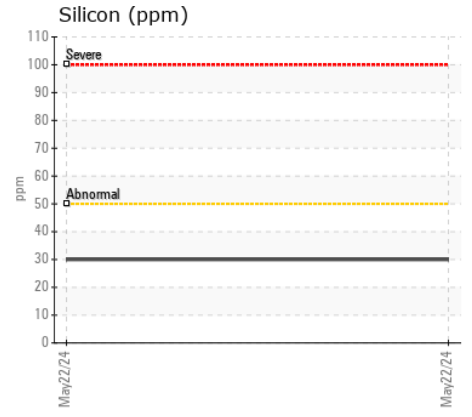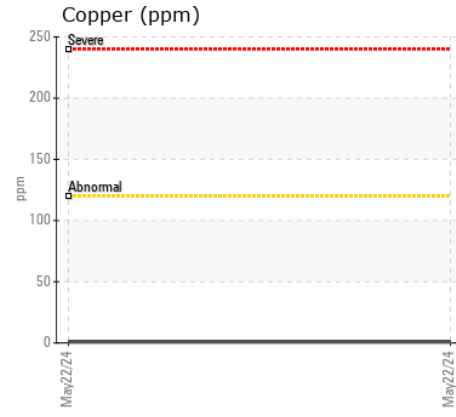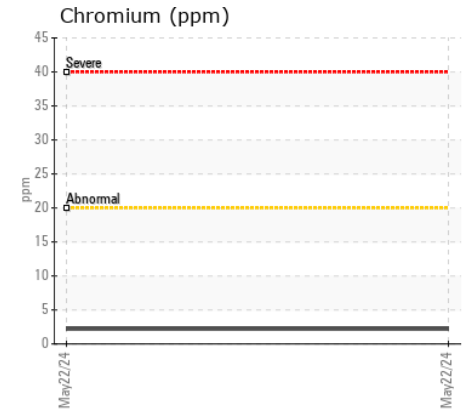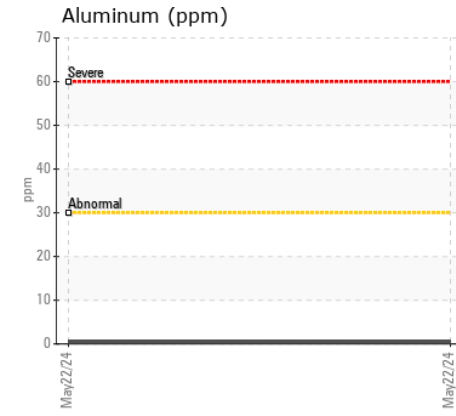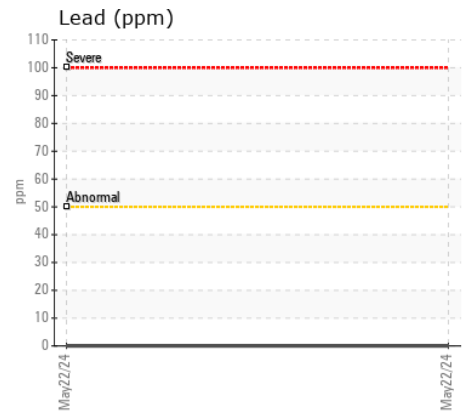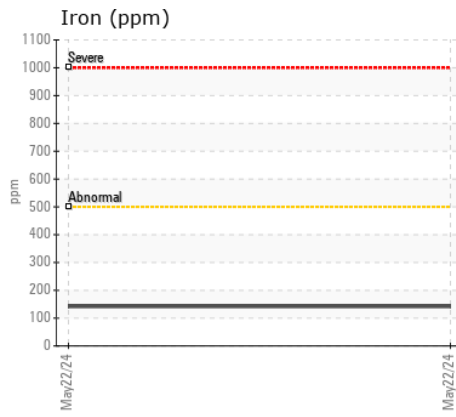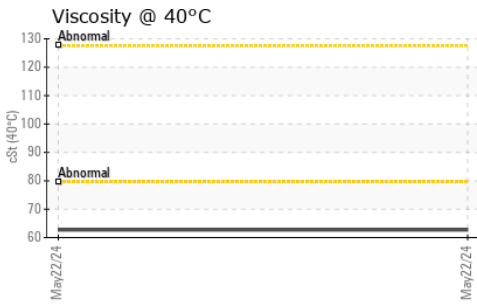

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP425970
Lab Number : 06192585
Unique Number : 11049337
Test Package : MOB 1

Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 30 May 2024 - Don Baldrige

GOURMETS DELIGHT
 PO BOX 160
 AVONDALE, PA
 US 19311

Contact: GABE VALENTINO
 gabe.valentino@gourmetsfinest.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (610)268-3578
 F: (610)268-2298