



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
LIEBHERR LH110 155976-1227
Component
Rear Left Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION





The oil viscosity is lower than normal. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0267551	LH0267534	LH0280578
Sample Date		Client Info		12 May 2024	18 Apr 2024	23 Feb 2024
Machine Age	hrs	Client Info		1951	1623	995
Oil Age	hrs	Client Info		956	628	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		None	None	None
Sample Status				ATTENTION	ATTENTION	NORMAL

Iron	ppm	ASTM D5185m	>650	55	36	55
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m	>4	<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>25	1	<1	2
Lead	ppm	ASTM D5185m	>4	<1	0	<1
Copper	ppm	ASTM D5185m	>60	12	8	17
Tin	ppm	ASTM D5185m	>4	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	7	5	17
Potassium	ppm	ASTM D5185m	>20	1	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m	>170	2	0	3
Boron	ppm	ASTM D5185m	400	3	<1	14
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	2	1	0
Manganese	ppm	ASTM D5185m		1	<1	2
Magnesium	ppm	ASTM D5185m	12	6	4	2
Calcium	ppm	ASTM D5185m	150	161	177	111
Phosphorus	ppm	ASTM D5185m	1650	435	466	1516
Zinc	ppm	ASTM D5185m	125	97	103	26
Sulfur	ppm	ASTM D5185m	22500	14769	16387	18669
Visc @ 40°C	cSt	ASTM D445	143	96.6	98.7	156

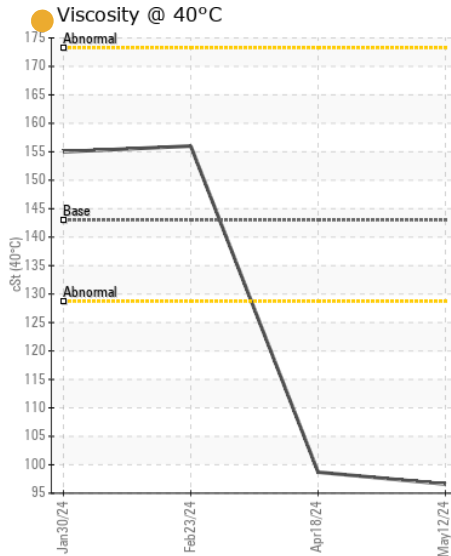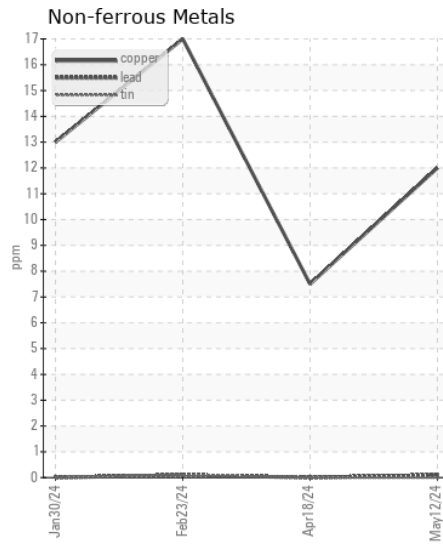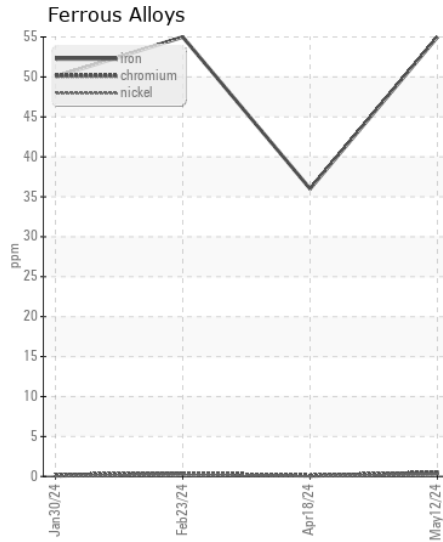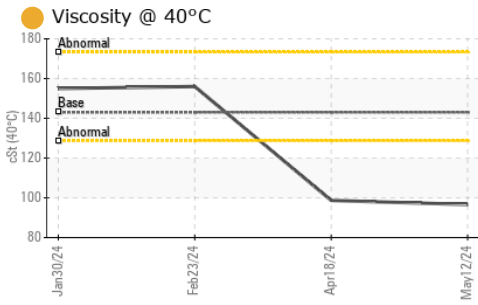

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0267551
Lab Number : 06192622
Unique Number : 11049374
Test Package : CONST
Received : 28 May 2024
Tested : 29 May 2024
Diagnosed : 30 May 2024 - Don Baldrige

KINDER MORGAN
 4301 IVERSON
 TRINITY, AL
 US 35601
 Contact: CHIP OAKES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (256)350-0006
 F: (256)355-5250