



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W22297-BURNETT]**  
 Machine Id  
**JOHN DEERE 6120M 1L06120MCMG131093**

Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210869	---	---
Sample Date		Client Info		22 May 2024	---	---
Machine Age	hrs	Client Info		482	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

### WEAR

All component wear rates are normal.

Test	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		22	---	---
Iron	ppm	ASTM D5185m	>20	22	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	4	---	---
Copper	ppm	ASTM D5185m	>75	12	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION









There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	9	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 103733	---	---
Particles >6µm		ASTM D7647	>1300	▲ 15900	---	---
Particles >14µm		ASTM D7647	>160	50	---	---
Particles >21µm		ASTM D7647	>40	10	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 24/21/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		85	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		34	---	---
Calcium	ppm	ASTM D5185m		3170	---	---
Phosphorus	ppm	ASTM D5185m		1059	---	---
Zinc	ppm	ASTM D5185m		1271	---	---
Sulfur	ppm	ASTM D5185m		6108	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.99	---	---
Visc @ 40°C	cSt	ASTM D445		50.2	---	---

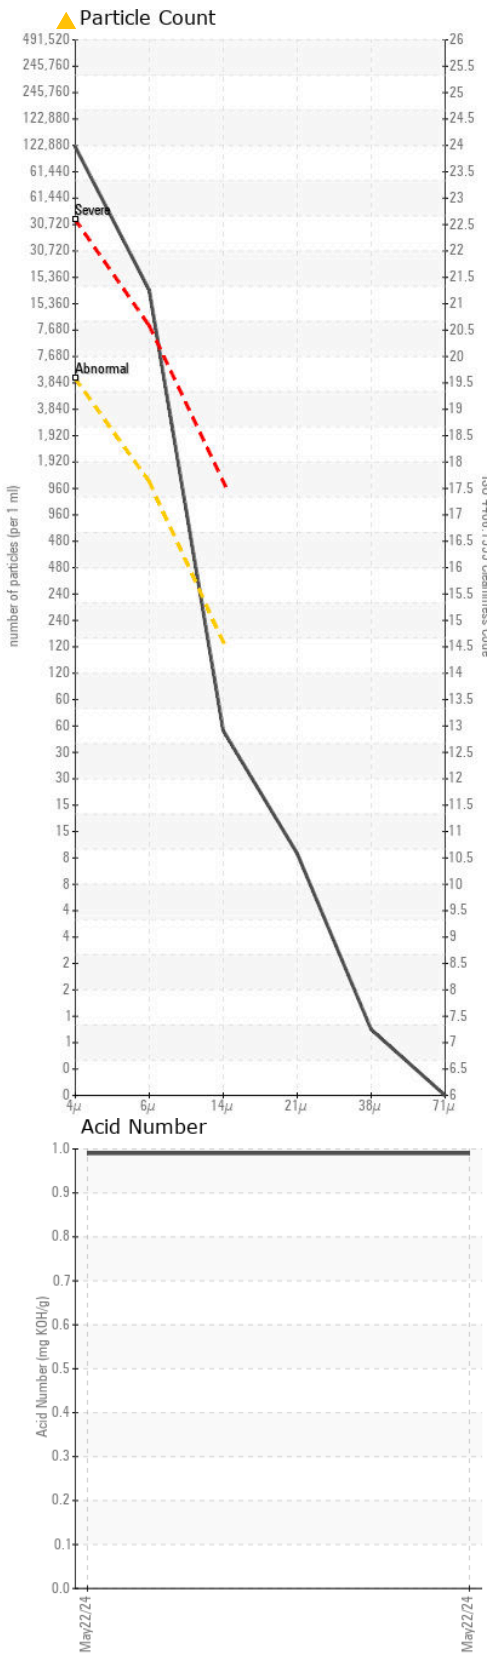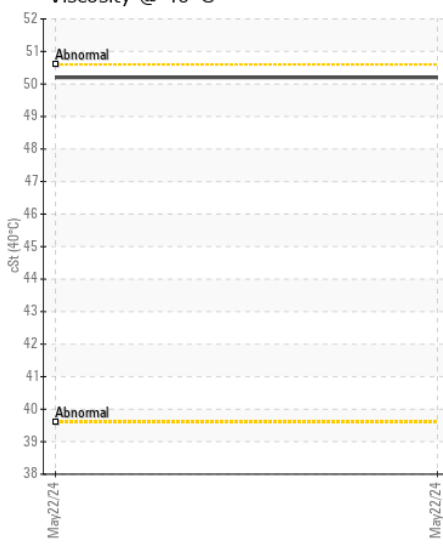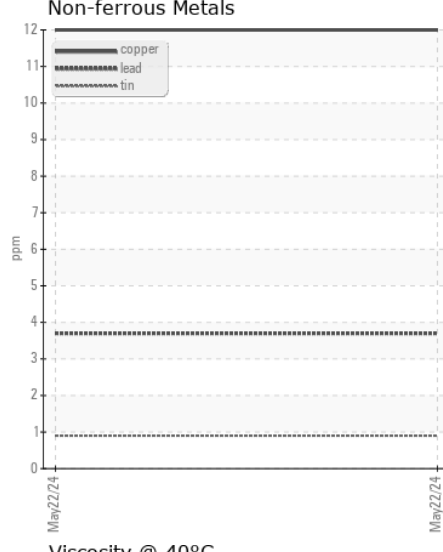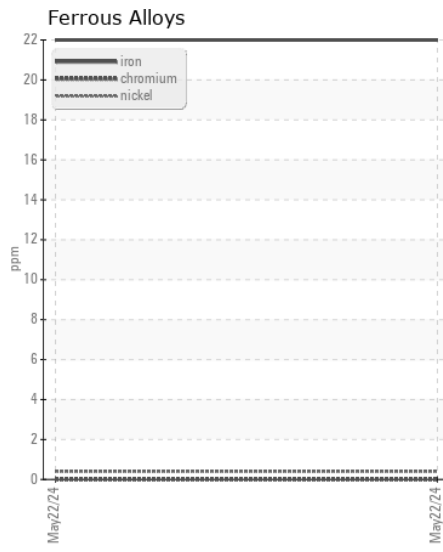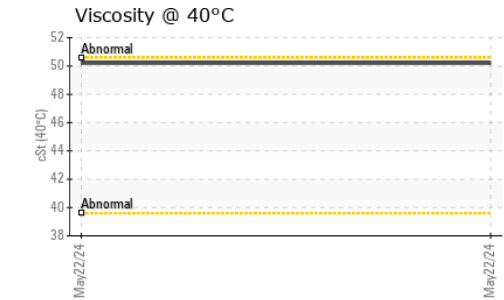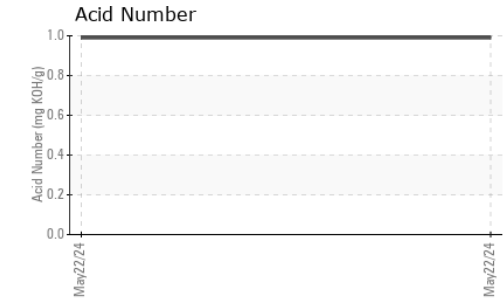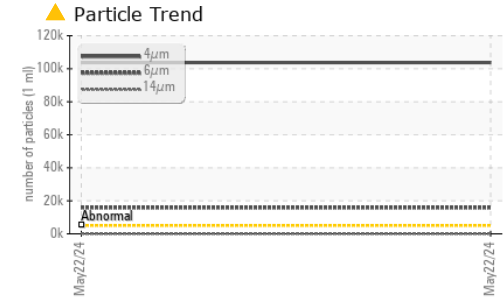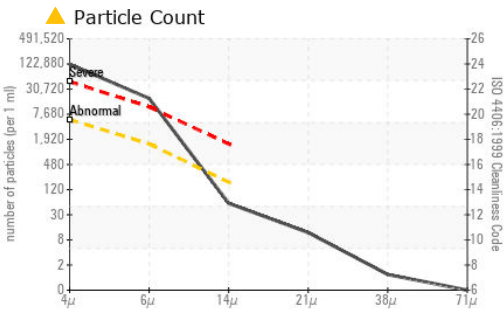

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0210869 **Received** : 28 May 2024  
**Lab Number** : 06192752 **Tested** : 30 May 2024  
**Unique Number** : 11049504 **Diagnosed** : 30 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - BURKEVILLE**  
 510 WEST COLONIAL DR  
 BURKEVILLE, VA  
 US 23922

Contact: BRANDON BOLLING  
 bbolling@jamesriverequipment.com

T: (434)767-5578  
 F: (434)767-3774