



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id  
**UNILOY 6**  
 Component  
**Hydraulic System**  
 Fluid  
**PETRO CANADA HYDREX AW 68 (--- GAL)**

**RECOMMENDATION**

We recommend you service the filters on this component. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**WEAR**

All component wear rates are normal.










**CONTAMINATION**

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JIC0001304	JIC0001045	JIC0000900
Sample Date		Client Info		20 May 2024	20 Nov 2023	14 Aug 2023
Machine Age	yrs	Client Info		0	0	0
Oil Age	yrs	Client Info		0	0	0
Filter Age	yrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	NORMAL	ABNORMAL
Iron	ppm	ASTM D5185m	>20	<1	0	2
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	<1	1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	0	0
Lead	ppm	ASTM D5185m	>20	<1	<1	<1
Copper	ppm	ASTM D5185m	>20	3	<1	8
Tin	ppm	ASTM D5185m	>20	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>15	<1	<1	1
Potassium	ppm	ASTM D5185m	>20	3	1	0
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	8829	4276	18775
Particles >6µm		ASTM D7647	>1300	910	509	3468
Particles >14µm		ASTM D7647	>160	35	17	260
Particles >21µm		ASTM D7647	>40	10	4	81
Particles >38µm		ASTM D7647	>10	1	0	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/17/12	19/16/11	21/19/15
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		2	<1	0
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m	0	<1	0	0
Magnesium	ppm	ASTM D5185m	0	1	<1	0
Calcium	ppm	ASTM D5185m	50	44	47	35
Phosphorus	ppm	ASTM D5185m	330	322	318	289
Zinc	ppm	ASTM D5185m	430	411	411	362
Sulfur	ppm	ASTM D5185m	760	942	814	939
Acid Number (AN)	mg KOH/g	ASTM D8045	0.60	0.31	0.34	---
Visc @ 40°C	cSt	ASTM D445	67.4	66.1	66.8	66.6

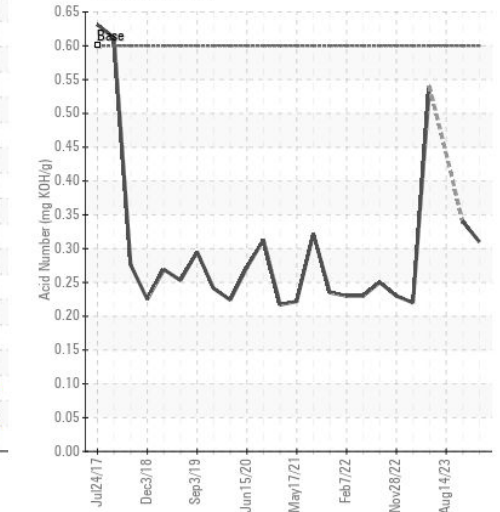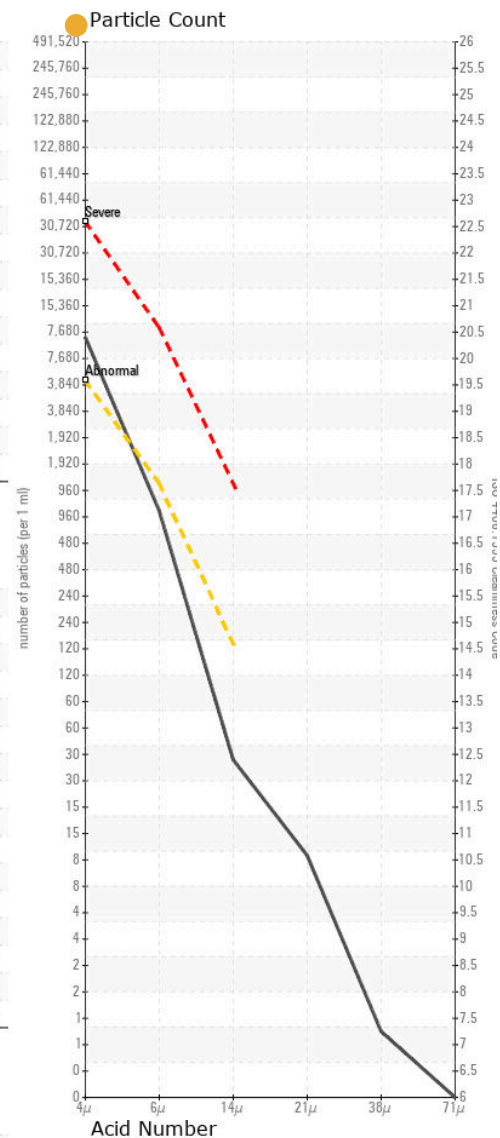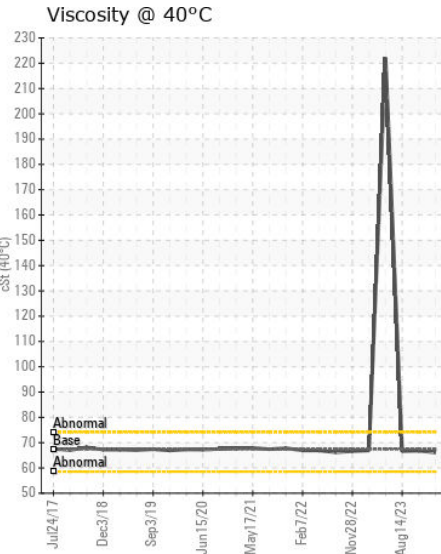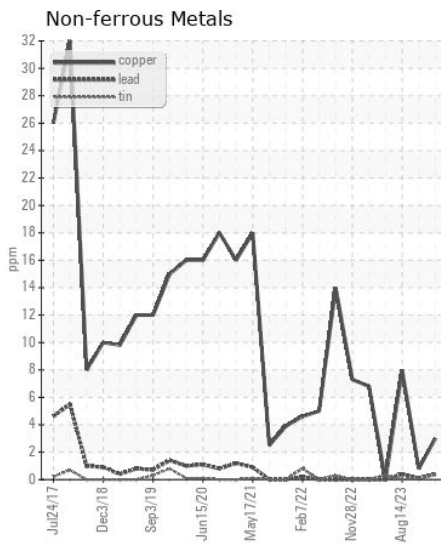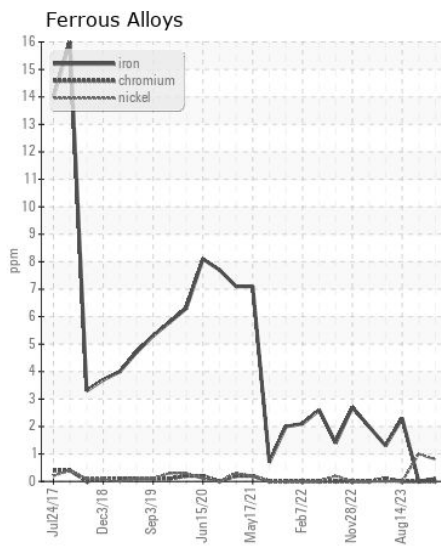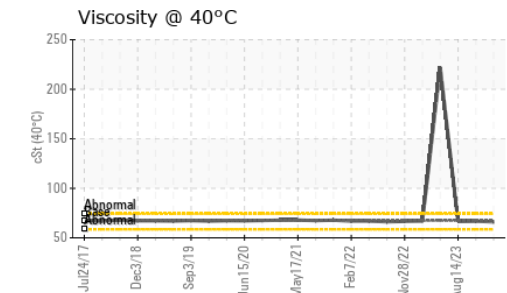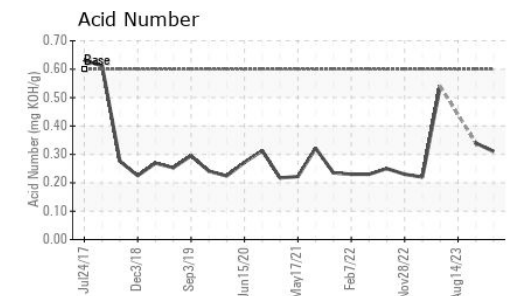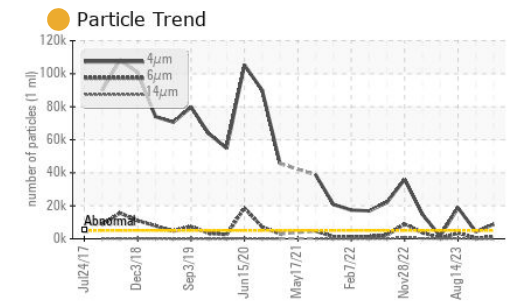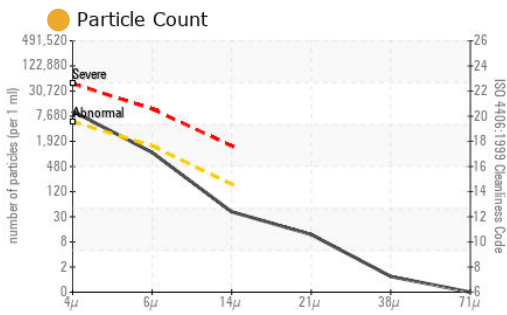

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JIC0001304

Lab Number : 06192768

Unique Number : 11049520

Test Package : IND 2

Received : 28 May 2024

Tested : 30 May 2024

Diagnosed : 30 May 2024 - Wes Davis

PET PLASTICS DBA BACPLAS

CIDRA, PR  
US

Contact: JOSE CARLOS COLON

jccolon@ccprb.com

T: (787)739-7100

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)