



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE JOHN DEERE 8370
 Component
Hydraulic System
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0011992	---	---
Sample Date		Client Info		20 May 2024	---	---
Machine Age	hrs	Client Info		4975	---	---
Oil Age	hrs	Client Info		157	---	---
Filter Age	hrs	Client Info		157	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	8	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	6	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	7	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647		8764	---	---
Particles >6µm		ASTM D7647	>1300	514	---	---
Particles >14µm		ASTM D7647	>160	31	---	---
Particles >21µm		ASTM D7647	>40	8	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>17/14	16/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m	6	41	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	3	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	145	71	---	---
Calcium	ppm	ASTM D5185m	3570	3265	---	---
Phosphorus	ppm	ASTM D5185m	1290	1064	---	---
Zinc	ppm	ASTM D5185m	1640	1259	---	---
Sulfur	ppm	ASTM D5185m		4129	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.8	1.26	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	48.4	---	---

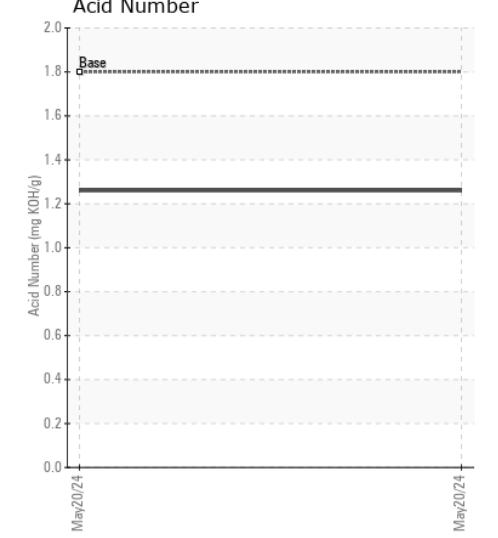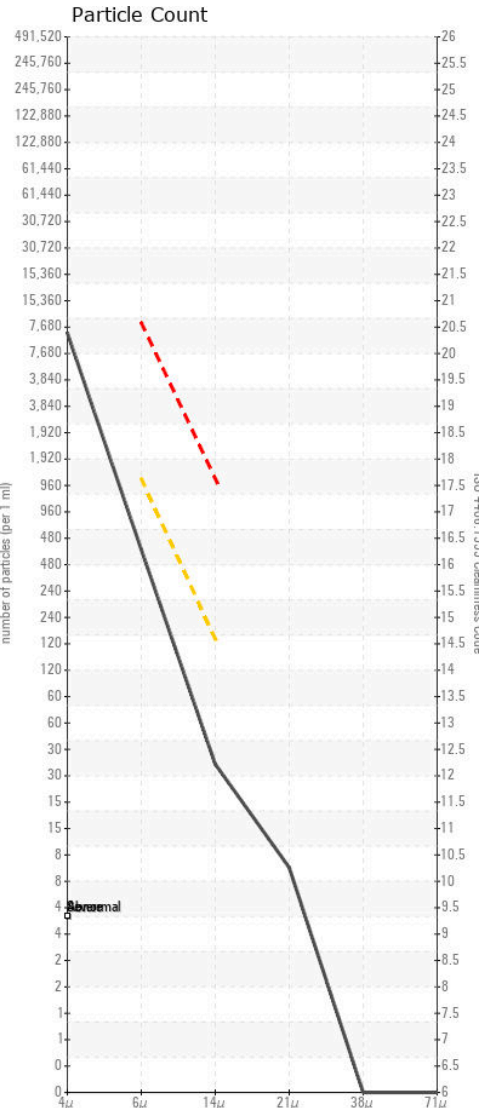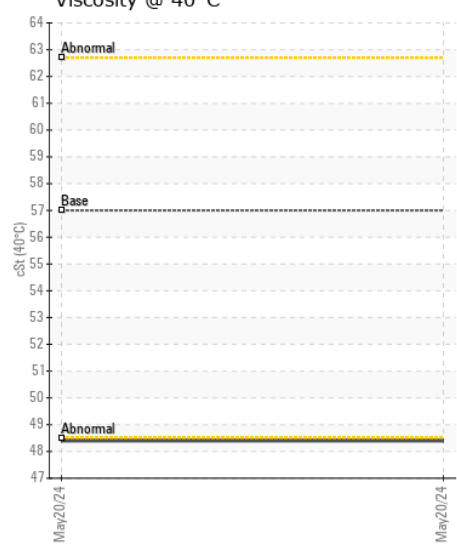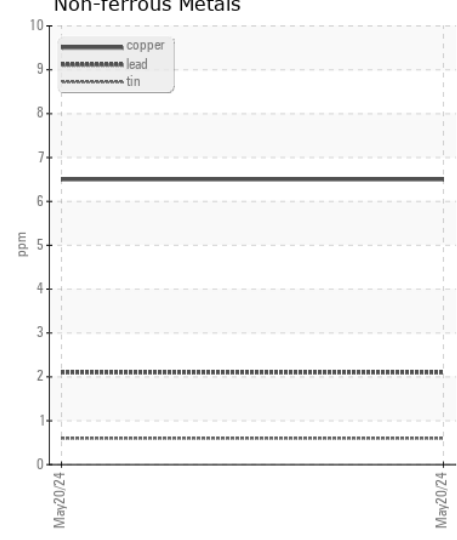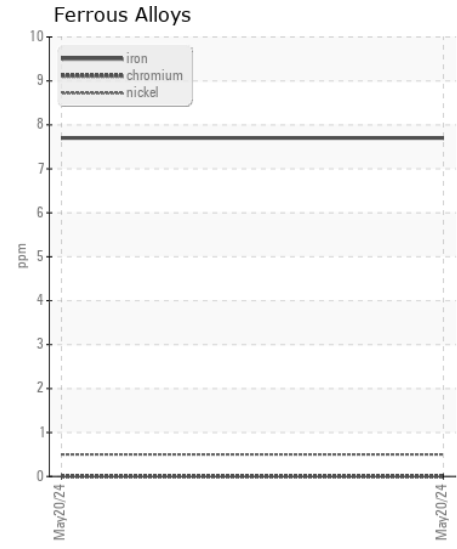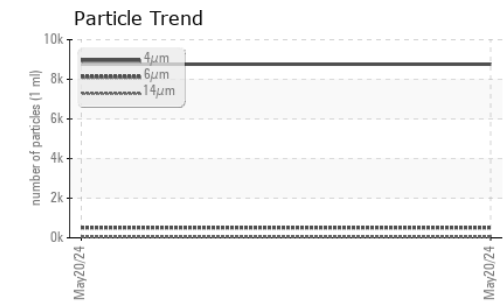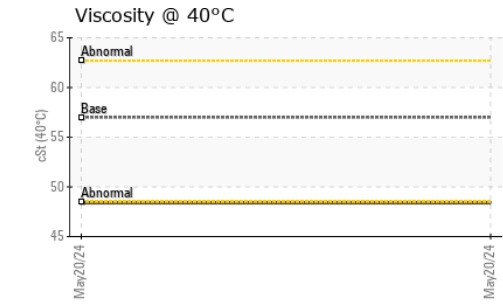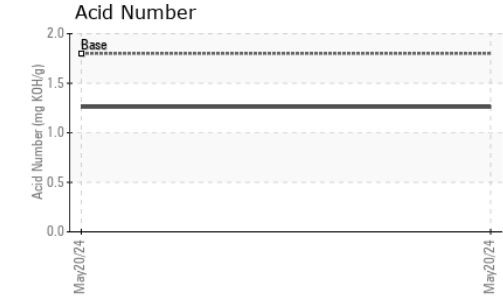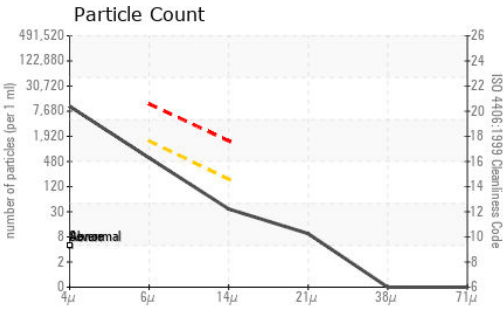

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0011992 **Received** : 28 May 2024
Lab Number : 06192771 **Tested** : 30 May 2024
Unique Number : 11049523 **Diagnosed** : 30 May 2024 - Don Baldrige
Test Package : MOB 2

LOUIS SCATENA RANCH
 1275 HWY 208
 YERINGTON, NV
 US 89447
 Contact: LOUIS SCATENA
 scatena1@msn.com
 T: 7(754)637-0001
 F: (775)463-7412

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)