



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WESTERN STAR T6
Component
Diesel Engine
Fluid
FACTOR D/D 10W30 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.













CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001313	---	---
Sample Date		Client Info		22 May 2024	---	---
Machine Age	hrs	Client Info		623	---	---
Oil Age	hrs	Client Info		623	---	---
Filter Age	hrs	Client Info		623	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>200	36	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>2	1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	1	---	---
Aluminum	ppm	ASTM D5185m	>30	9	---	---
Lead	ppm	ASTM D5185m	>30	<1	---	---
Copper	ppm	ASTM D5185m	>30	▲ 456	---	---
Tin	ppm	ASTM D5185m	>15	8	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>30	10	---	---
Potassium	ppm	ASTM D5185m	>20	36	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		36	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		46	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		486	---	---
Calcium	ppm	ASTM D5185m		1581	---	---
Phosphorus	ppm	ASTM D5185m		662	---	---
Zinc	ppm	ASTM D5185m		790	---	---
Sulfur	ppm	ASTM D5185m		1868	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.58	---	---
Visc @ 100°C	cSt	ASTM D445		9.9	---	---

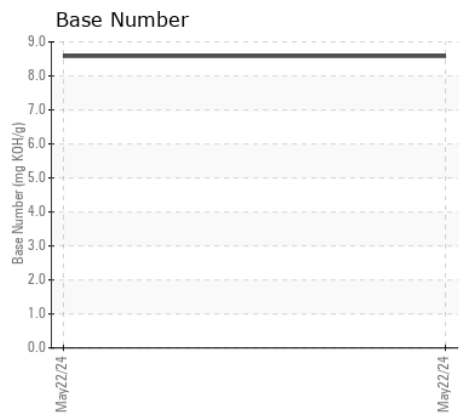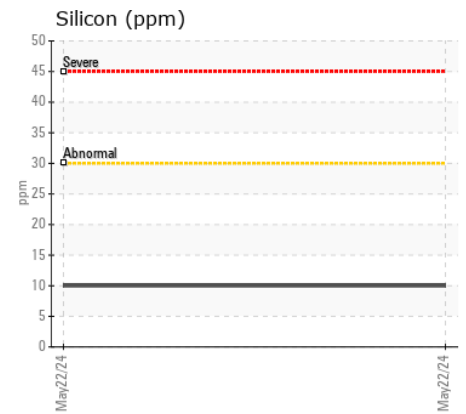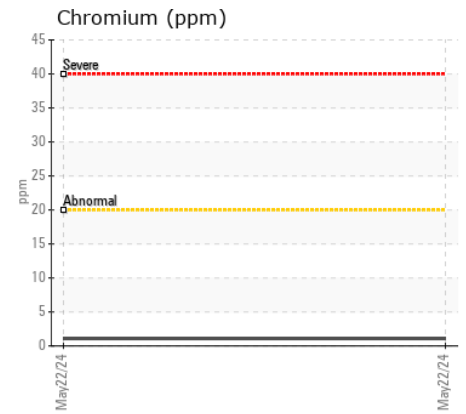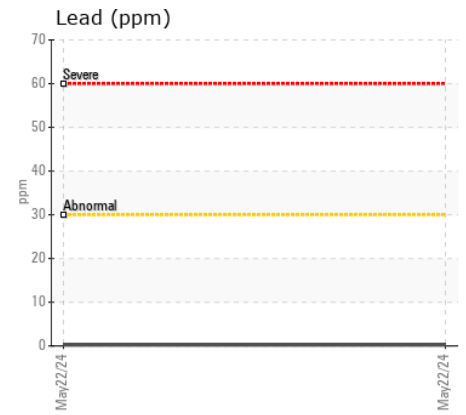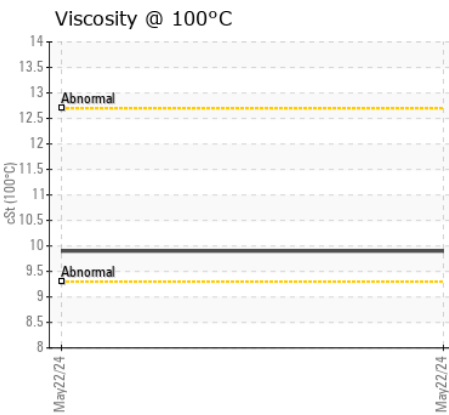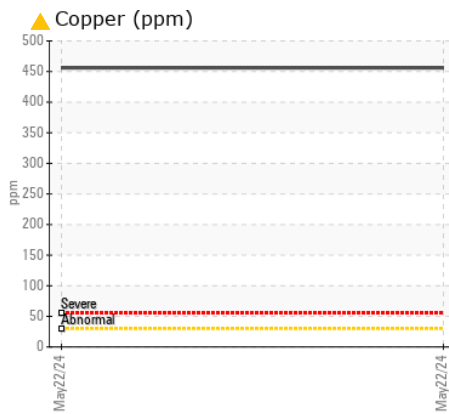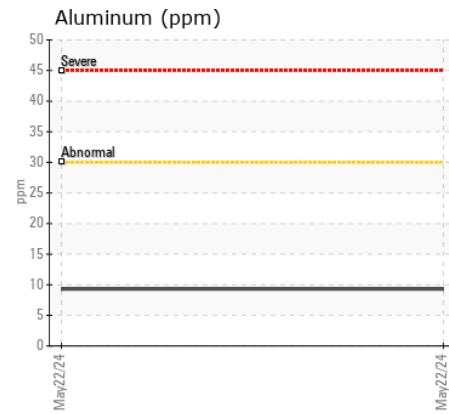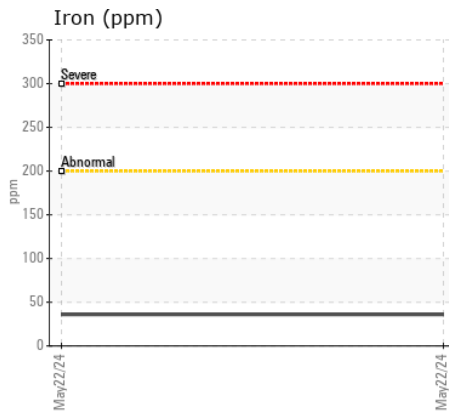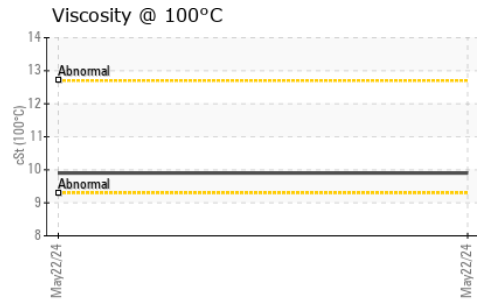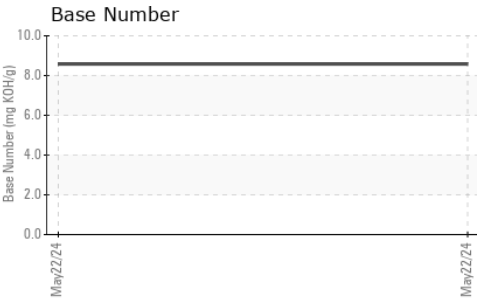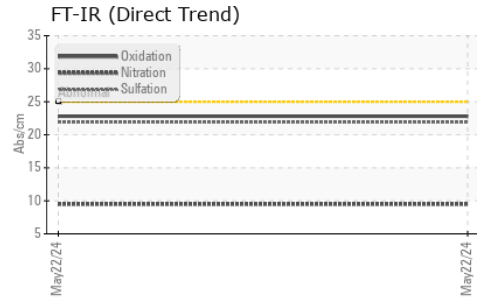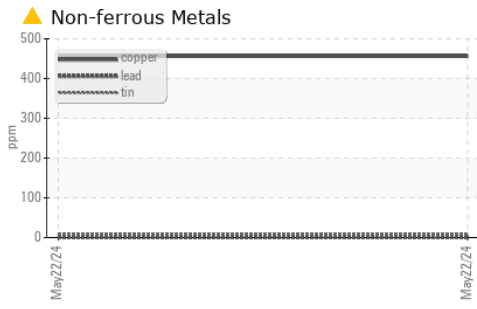

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001313
Lab Number : 06192994
Unique Number : 11049746
Test Package : MOB 2
Received : 28 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Sean Felton

SELECT DEMO
 40 LOWELL RD
 SALEM, NH
 US 03079

Contact: STAN DOGIL
 SDOGIL@SELECTDEMOSERVICES.COM
 T: (603)401-0147
 F: (603)458-7389

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)