



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 2
 Component
Diesel Engine
 Fluid
TRC MOLY XL PRO-SPEC IV XP 15W40 (12 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06193036	TR06159862	TR06100309
Sample Date		Client Info		22 May 2024	08 Apr 2024	12 Feb 2024
Machine Age	mls	Client Info		259488	251000	241050
Oil Age	mls	Client Info		30000	20497	10471
Filter Age	mls	Client Info		30000	20497	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	47	32	25
Chromium	ppm	ASTM D5185m	>20	2	2	<1
Nickel	ppm	ASTM D5185m	>2	<1	1	<1
Titanium	ppm	ASTM D5185m	>2	<1	<1	0
Silver	ppm	ASTM D5185m	>2	1	<1	<1
Aluminum	ppm	ASTM D5185m	>20	9	8	7
Lead	ppm	ASTM D5185m	>40	5	4	3
Copper	ppm	ASTM D5185m	>330	4	3	4
Tin	ppm	ASTM D5185m	>15	1	2	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	11	10	8
Potassium	ppm	ASTM D5185m	>20	8	8	13
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.9	0.7	0.5
Nitration	Abs/cm	*ASTM D7624	>20	16.9	15.1	12.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	35.1	30.8	25.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	2	10
Boron	ppm	ASTM D5185m		<1	0	7
Barium	ppm	ASTM D5185m		<1	<1	0
Molybdenum	ppm	ASTM D5185m		137	139	136
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m		23	21	30
Calcium	ppm	ASTM D5185m		4268	4461	4514
Phosphorus	ppm	ASTM D5185m		876	974	941
Zinc	ppm	ASTM D5185m		1062	1103	1169
Sulfur	ppm	ASTM D5185m		4139	4879	4416
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.3	21.3	16.7
Base Number (BN)	mg KOH/g	ASTM D2896		10.16	10.48	12.24
Visc @ 100°C	cSt	ASTM D445		15.3	14.7	15.2

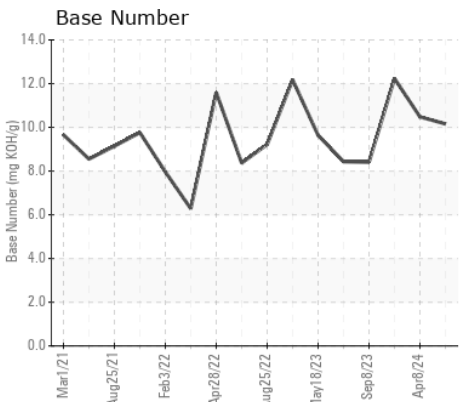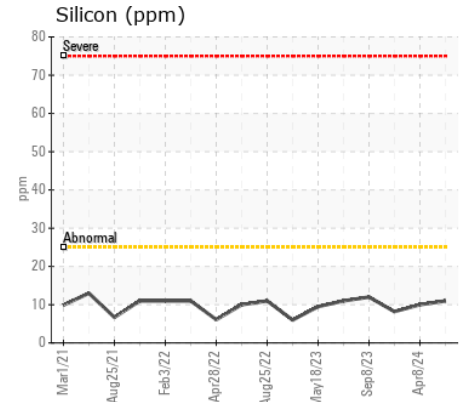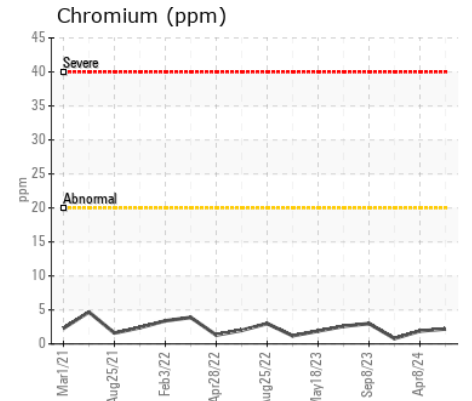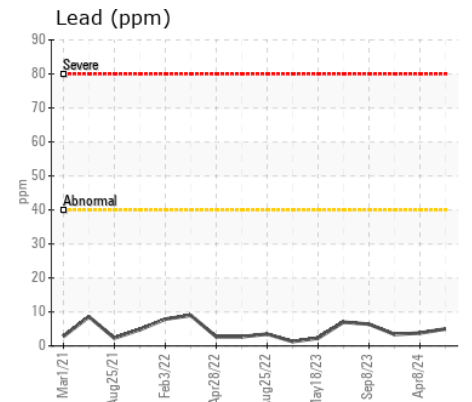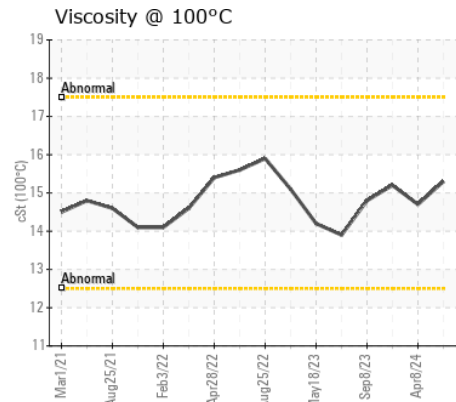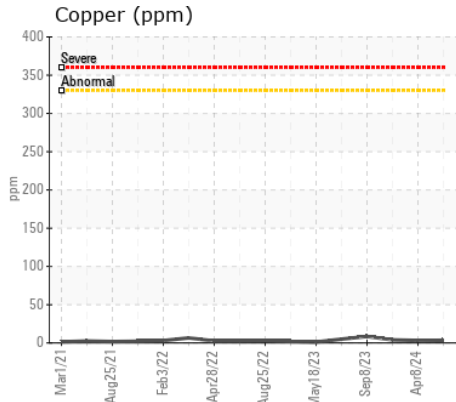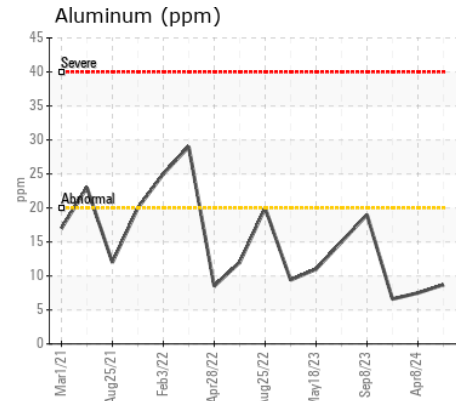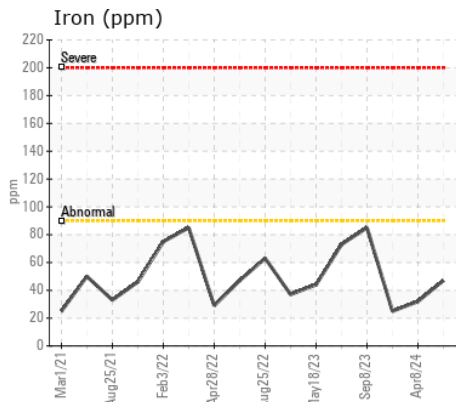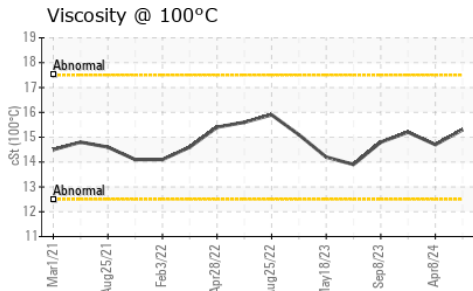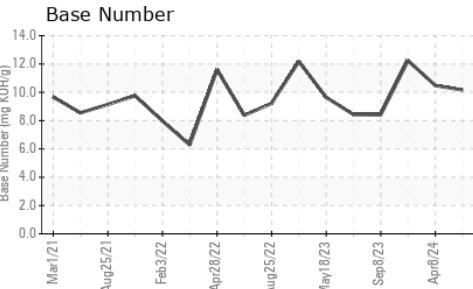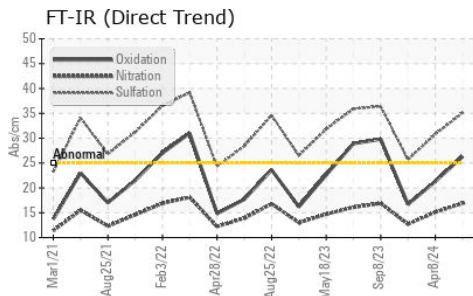

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06193036
Lab Number : 06193036
Unique Number : 11049788
Test Package : MOB 2
Received : 28 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Sean Felton

VAUGHN TRUCKING
 90911 LEWIS AND CLARK RD
 ASTORIA, OR
 US 97103
 Contact: JEFF WARREN

To discuss this sample report, contact Customer Service at 1-800-827-0711.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: