



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**CASE 15499 CR1202 - INNER (S/N 98205)**  
 Component  
**Front Right Final Drive**  
 Fluid  
**GEAR OIL ISO 220 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0935986</b>	WC0809302	---
Sample Date		Client Info		<b>16 May 2024</b>	10 May 2023	---
Machine Age	hrs	Client Info		<b>11866</b>	11257	---
Oil Age	hrs	Client Info		<b>1000</b>	1410	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>4</b>	10	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>1</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>2</b>	1	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Boron	ppm	ASTM D5185m	50	<b>6</b>	16	---
Barium	ppm	ASTM D5185m	15	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	15	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	50	<b>&lt;1</b>	1	---
Calcium	ppm	ASTM D5185m	50	<b>4</b>	3	---
Phosphorus	ppm	ASTM D5185m	350	<b>363</b>	431	---
Zinc	ppm	ASTM D5185m	100	<b>3</b>	6	---
Sulfur	ppm	ASTM D5185m	12500	<b>5591</b>	7634	---
Visc @ 40°C	cSt	ASTM D445	220	<b>212</b>	223	---

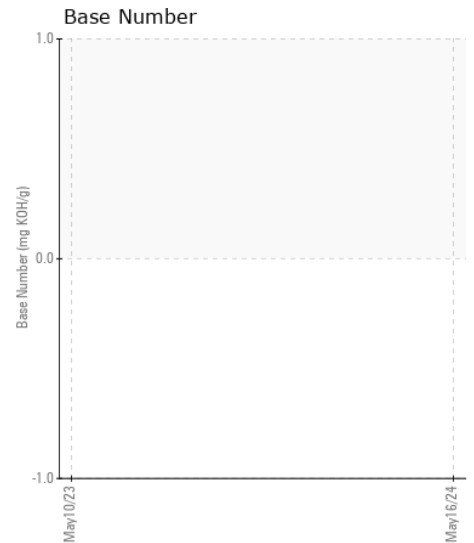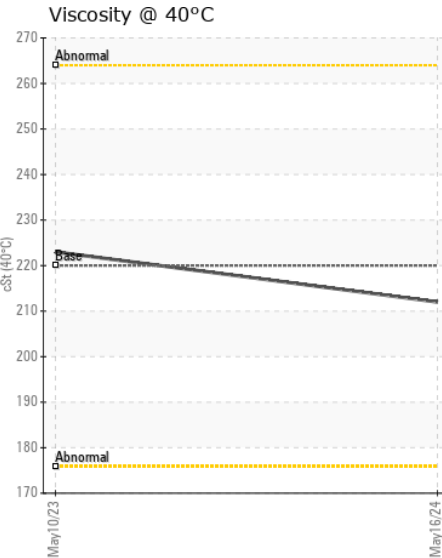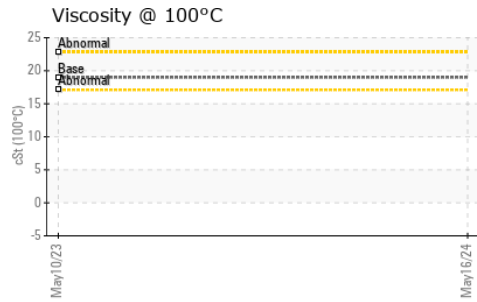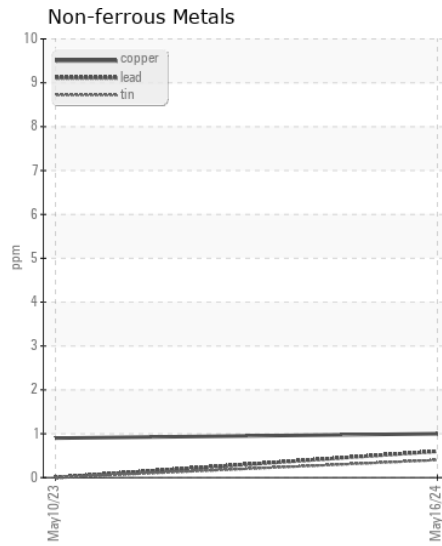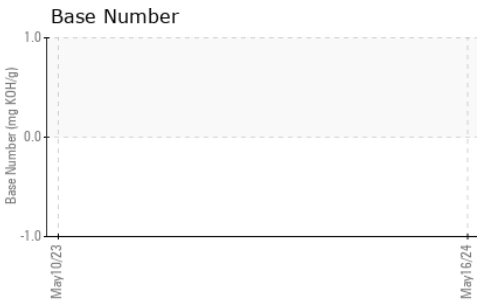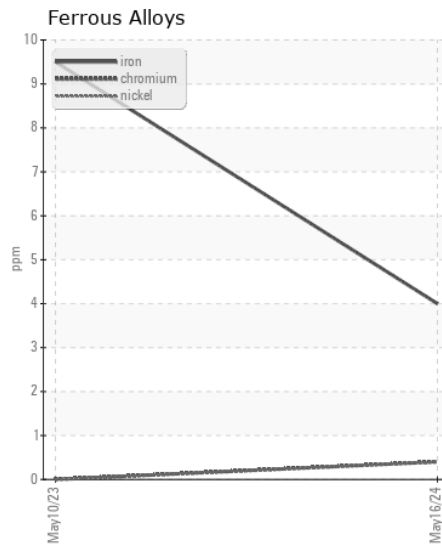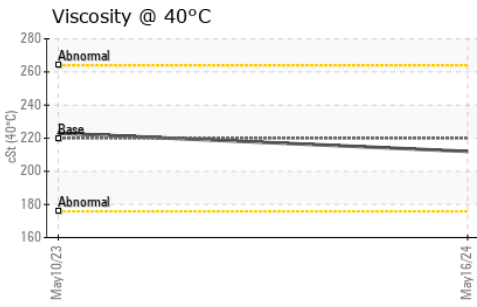

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935986 **Received** : 28 May 2024  
**Lab Number** : 06193115 **Tested** : 30 May 2024  
**Unique Number** : 11049867 **Diagnosed** : 30 May 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: FT-IR, KV100, TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**BUCKNER HEAVY LIFT**

4732 NC 54 EAST  
GRAHAM, NC  
US 27253-9215

Contact: MICHAEL LAWSON  
michaell@bucknercompanies.com

T: (336)376-8888  
F: (336)376-4090