



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
CR3303
Component
Left Planetary
Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.








CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0935865	WC0785092	---
Sample Date		Client Info		22 May 2024	23 Mar 2023	---
Machine Age	hrs	Client Info		10221	8410	---
Oil Age	hrs	Client Info		1811	1689	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	Changed	---
Sample Status				ATTENTION	ABNORMAL	---
<hr/>						
Iron	ppm	ASTM D5185m	>500	9	11	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	0	---
Lead	ppm	ASTM D5185m	>25	<1	<1	---
Copper	ppm	ASTM D5185m	>75	56	▲ 81	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
<hr/>						
Silicon	ppm	ASTM D5185m	>75	2	3	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
<hr/>						
Sodium	ppm	ASTM D5185m		<1	0	---
Boron	ppm	ASTM D5185m	50	6	6	---
Barium	ppm	ASTM D5185m	15	0	0	---
Molybdenum	ppm	ASTM D5185m	15	0	<1	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m	50	3	4	---
Calcium	ppm	ASTM D5185m	50	59	79	---
Phosphorus	ppm	ASTM D5185m	350	377	405	---
Zinc	ppm	ASTM D5185m	100	125	183	---
Sulfur	ppm	ASTM D5185m	12500	5591	6125	---
Visc @ 40°C	cSt	ASTM D445	220	● 127	● 100	---

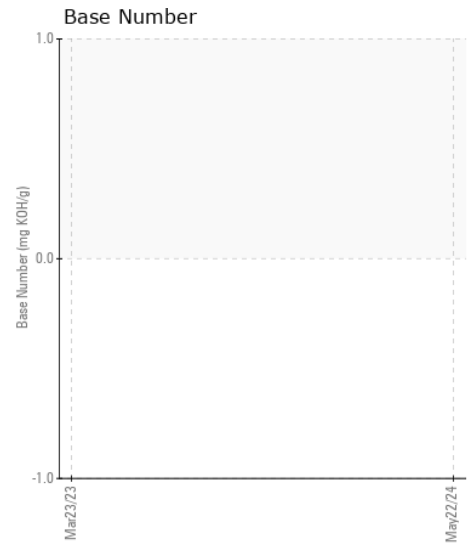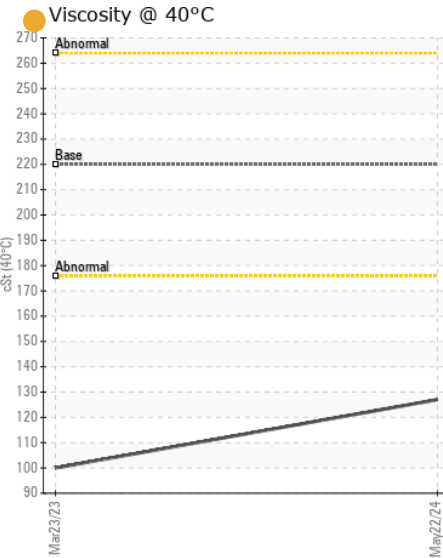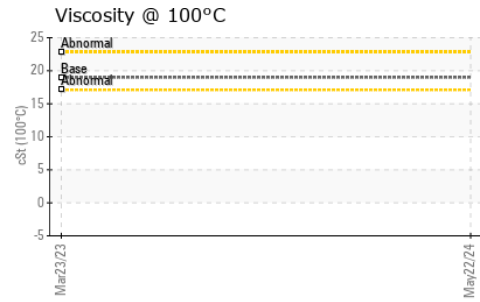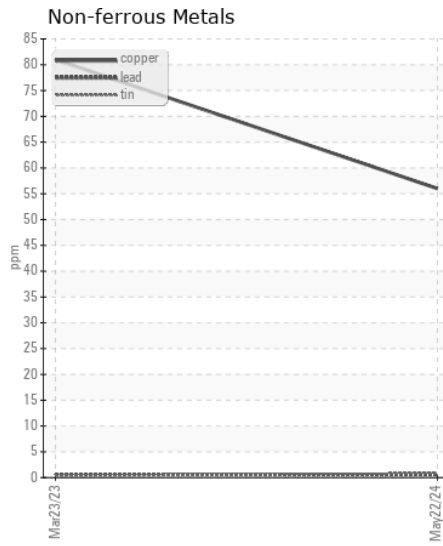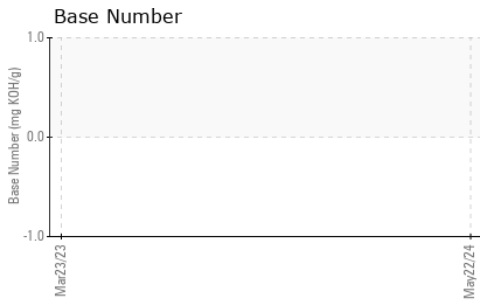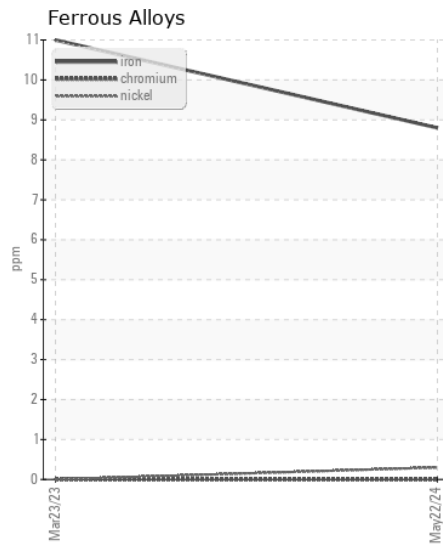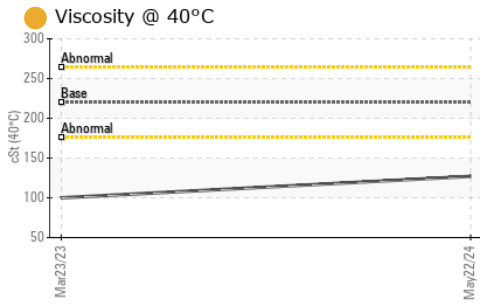

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0935865 **Received** : 28 May 2024
Lab Number : 06193134 **Tested** : 30 May 2024
Unique Number : 11049886 **Diagnosed** : 30 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: FT-IR, KV100, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BUCKNER HEAVY LIFT

4732 NC 54 EAST
 GRAHAM, NC
 US 27253-9215

Contact: MICHAEL LAWSON
 michael@bucknercompanies.com

T: (336)376-8888
 F: (336)376-4090