



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
957
 Component
Transmission (Auto)
 Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION










The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0036007	DC0025081	DC0022104
Sample Date		Client Info		15 May 2024	11 Nov 2022	24 Jun 2020
Machine Age	mls	Client Info		132495	96716	80739
Oil Age	mls	Client Info		30000	30000	0
Filter Age	mls	Client Info		30000	30000	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		Changed	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>160	88	91	71
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	35	39	32
Lead	ppm	ASTM D5185m	>50	11	17	17
Copper	ppm	ASTM D5185m	>225	57	43	24
Tin	ppm	ASTM D5185m	>10	4	5	4
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>20	6	5	5
Potassium	ppm	ASTM D5185m	>20	4	0	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		4	3	3
Boron	ppm	ASTM D5185m		76	82	82
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		1	1	1
Magnesium	ppm	ASTM D5185m		4	0	1
Calcium	ppm	ASTM D5185m		103	98	97
Phosphorus	ppm	ASTM D5185m		217	201	257
Zinc	ppm	ASTM D5185m		15	0	11
Sulfur	ppm	ASTM D5185m		1483	939	1305
Visc @ 40°C	cSt	ASTM D445	35.0	33.2	33.8	34.0

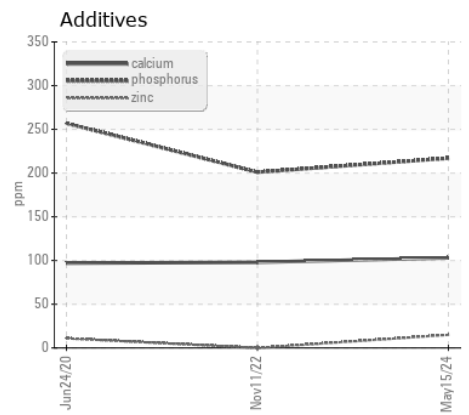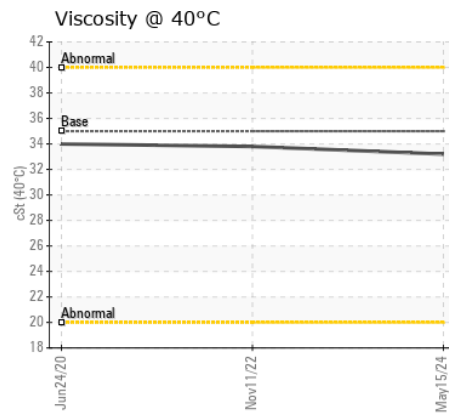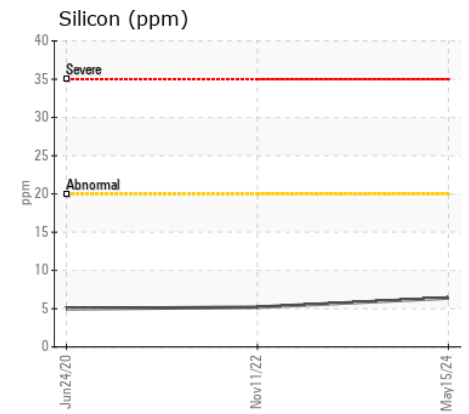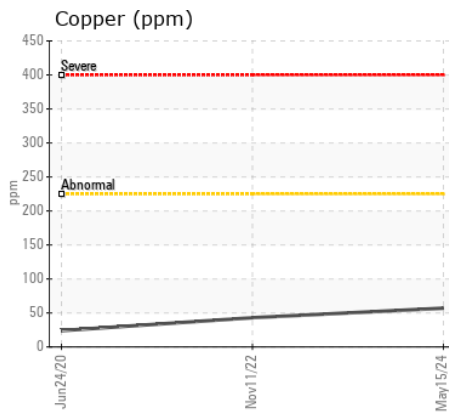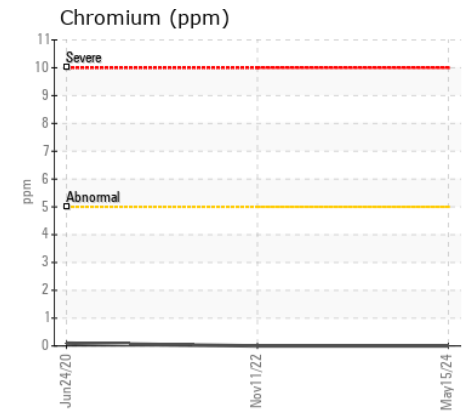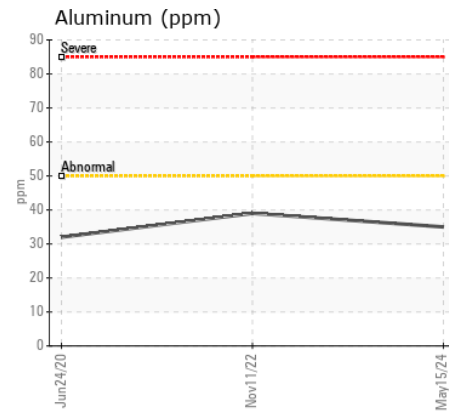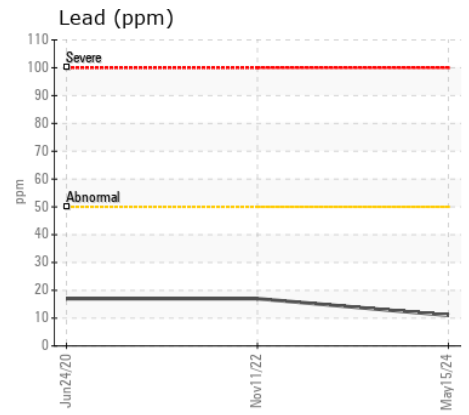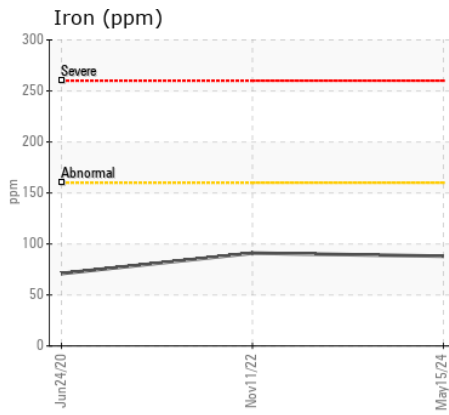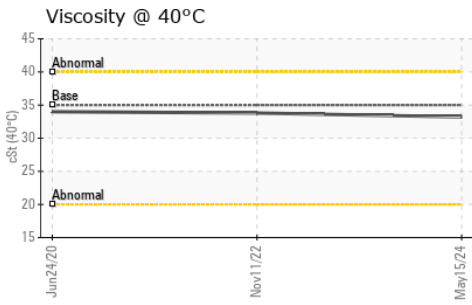

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0036007
Lab Number : 06193158
Unique Number : 11049910
Test Package : MOB 1

Received : 28 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Sean Felton

FRANCIS O DAY
 14900 SOUTHLAWN LN
 ROCKVILLE, MD
 US 20850
 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: