

Area  
**KEMP QUARRIES / KEMP STONE - FAIRLAND [69383]**

Machine Id  
**OHT123**  
Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA PRODURO TO-4 SAE 30 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. ( Customer Sample Comment: PM-2 changed fluid and filters )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0109097</b>	PCA0070629	PCA0084733
Sample Date		Client Info		<b>22 May 2024</b>	02 Jan 2024	02 Oct 2023
Machine Age	hrs	Client Info		<b>38485</b>	37987	37517
Oil Age	hrs	Client Info		<b>38485</b>	37987	37517
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>12</b>	2	6
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	3
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>2</b>	<1	2
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>225	<b>4</b>	10	158
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>6</b>	8	5
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	<1	0
Boron	ppm	ASTM D5185m	2	<b>0</b>	<1	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	<1	2
Manganese	ppm	ASTM D5185m	9	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1	<b>36</b>	44	16
Calcium	ppm	ASTM D5185m	3131	<b>1748</b>	2660	3058
Phosphorus	ppm	ASTM D5185m	1194	<b>707</b>	952	840
Zinc	ppm	ASTM D5185m	1281	<b>848</b>	1154	1097
Sulfur	ppm	ASTM D5185m	3811	<b>2796</b>	3589	3855
Visc @ 40°C	cSt	ASTM D445	88.5	<b>75.8</b>	82.5	86.1

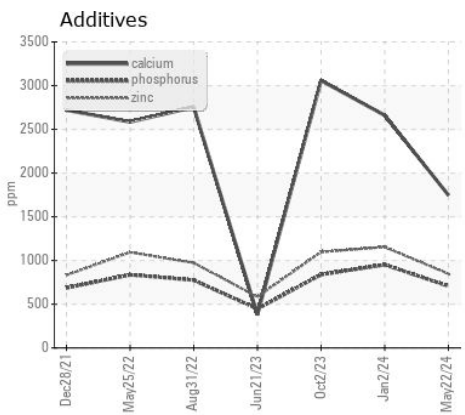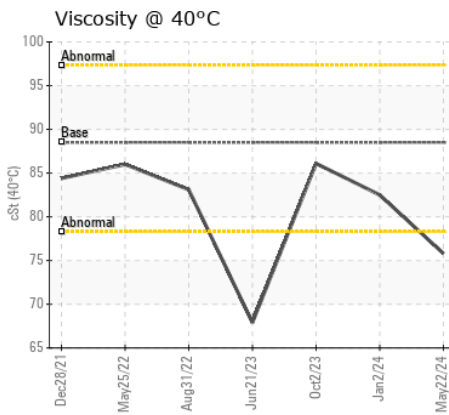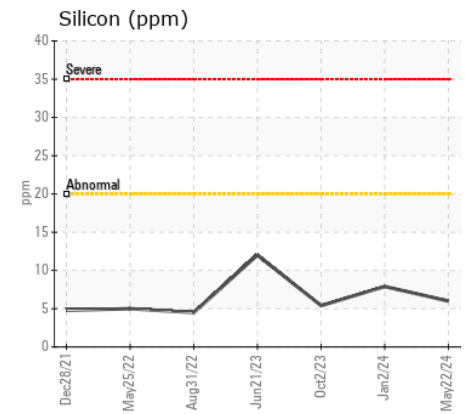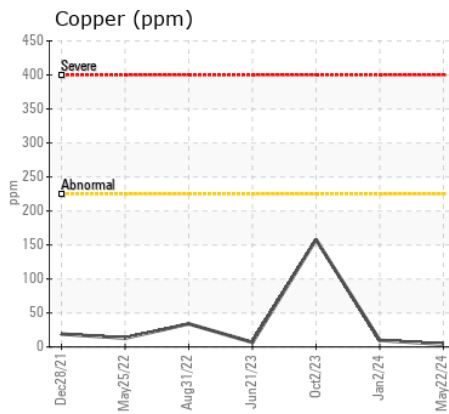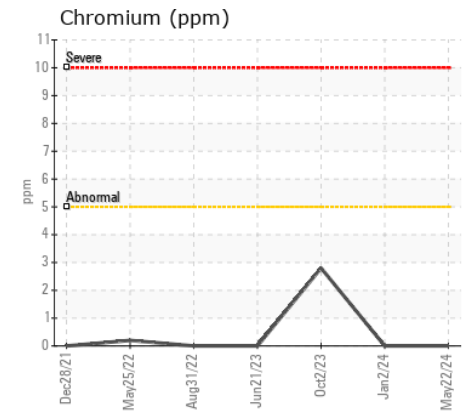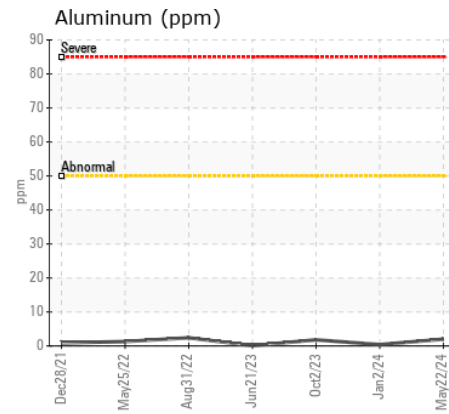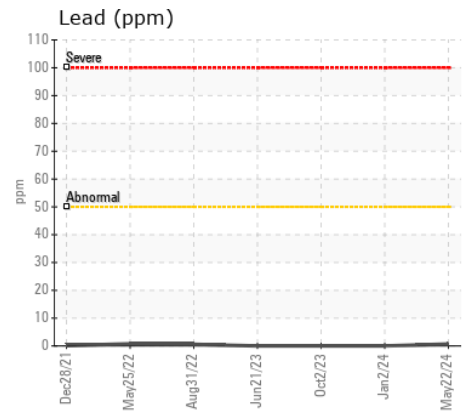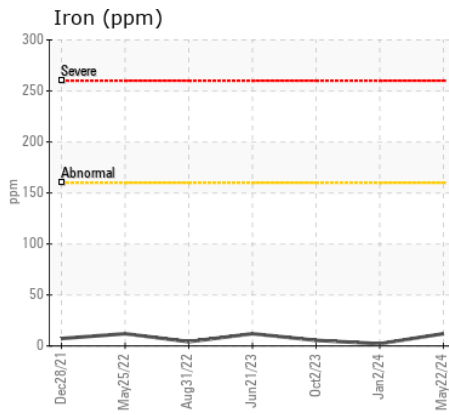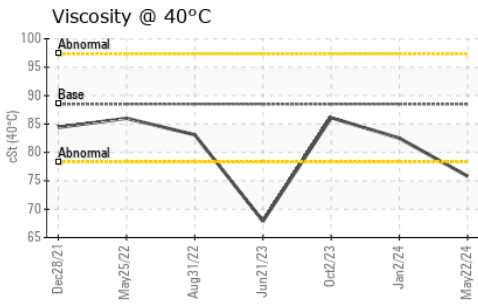

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109097 **Received** : 28 May 2024  
**Lab Number** : 06193165 **Tested** : 30 May 2024  
**Unique Number** : 11049917 **Diagnosed** : 30 May 2024 - Sean Felton  
**Test Package** : MOB 1

**Kemp Quarries - Kemp Stone - Fairland**  
 18350 S 590 Rd  
 Fairland, OK  
 US 74343  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

fairland@kempstone.com

T:

F: