



WEAR	SEVERE
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VPA043067 (S/N NOT GIVEN)

Component
Gearbox

Fluid
 {not provided} (--- GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

WEAR

Gear wear is indicated.

CONTAMINATION


There is no indication of any contamination in the oil.

FLUID CONDITION


The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA043067	---	---
Sample Date		Client Info		28 May 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---
PQ		ASTM D8184		18	---	---
Iron	ppm	ASTM D5185m	>150	▲ 468	---	---
Chromium	ppm	ASTM D5185m	>10	5	---	---
Nickel	ppm	ASTM D5185m	>10	4	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>5	▲ 29	---	---
Lead	ppm	ASTM D5185m	>65	<1	---	---
Copper	ppm	ASTM D5185m	>80	3	---	---
Tin	ppm	ASTM D5185m	>8	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>20	5	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		329	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		33	---	---
Calcium	ppm	ASTM D5185m		47	---	---
Phosphorus	ppm	ASTM D5185m		1602	---	---
Zinc	ppm	ASTM D5185m		53	---	---
Sulfur	ppm	ASTM D5185m		31581	---	---
Visc @ 40°C	cSt	ASTM D445		104.8	---	---


▲ Ferrous Alloys

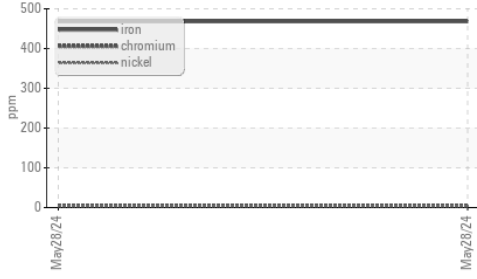


▲ Iron (ppm)

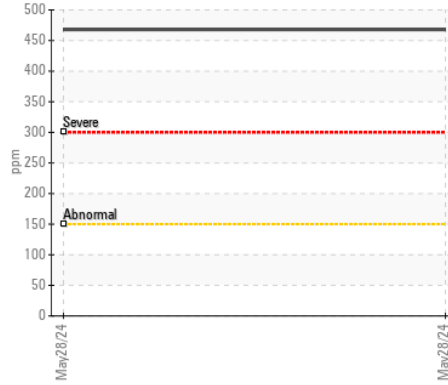


▲ Lead (ppm)

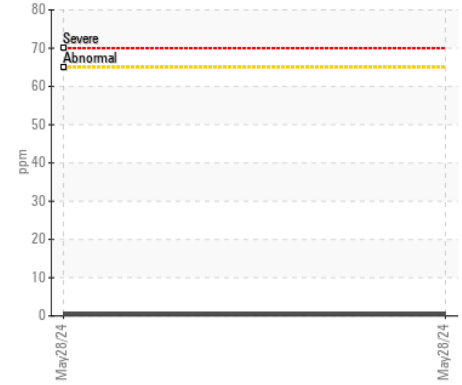


▲ Aluminum (ppm)

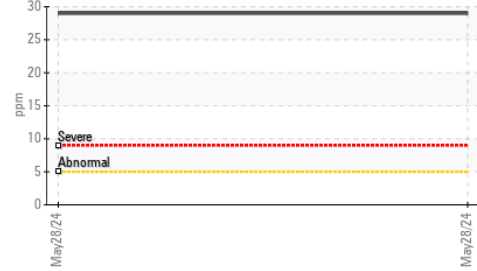


▲ Aluminum (ppm)

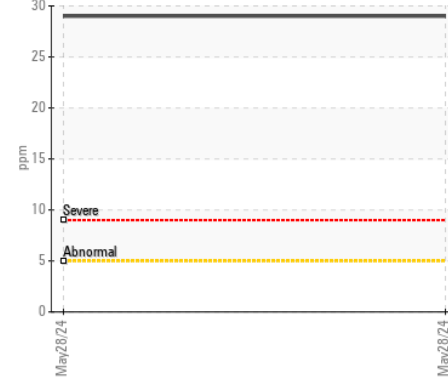


▲ Chromium (ppm)

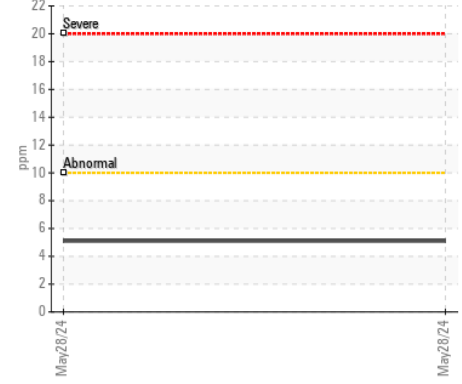


▲ Viscosity @ 40°C

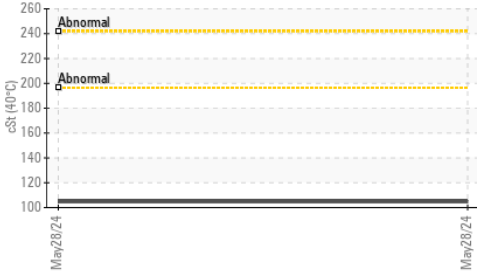


▲ Copper (ppm)

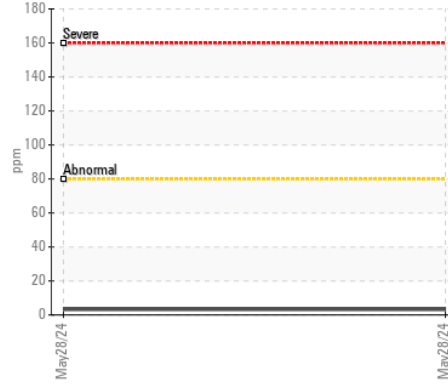


▲ Silicon (ppm)

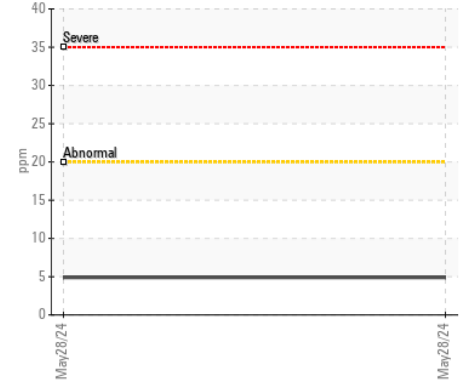


▲ PQ

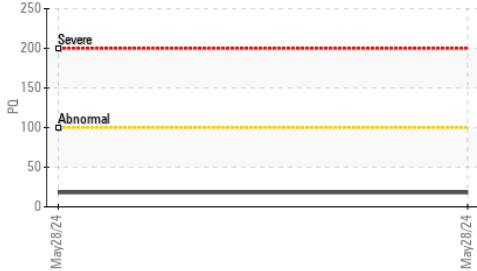

▲ Viscosity @ 40°C

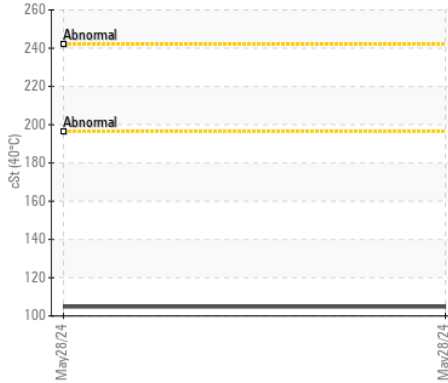

▲ Base Number

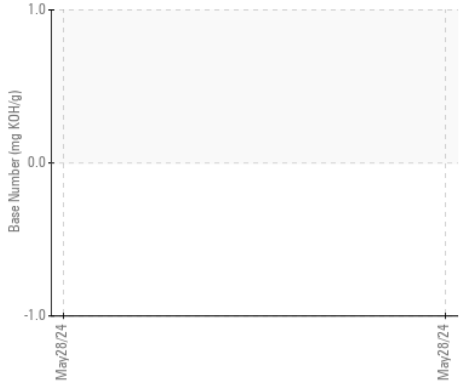

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA043067
Lab Number : 06193185
Unique Number : 11049937
Test Package : MOB 1 (Additional Tests: FT-IR, FuelDilution, KV100, PQ, TBN)

Received : 28 May 2024
Tested : 05 Jun 2024
Diagnosed : 05 Jun 2024 - Jonathan Hester

Viking Boat Harbor Inc
 1121 S. Islington Rd.
 CEDARVILLE, MI
 US 49719
 Contact: Steve Honnila
 stevehonnila@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: