



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
904
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 5W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HRE000228	WC0717426	WC0604096
Sample Date		Client Info		20 May 2024	03 Oct 2022	25 Aug 2021
Machine Age	mls	Client Info		393167	297466	206429
Oil Age	mls	Client Info		50000	100000	0
Filter Age	mls	Client Info		50000	50000	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	107	113	139
Chromium	ppm	ASTM D5185m	>20	5	5	8
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	14	25	31
Lead	ppm	ASTM D5185m	>40	17	22	24
Copper	ppm	ASTM D5185m	>330	3	4	5
Tin	ppm	ASTM D5185m	>15	1	2	2
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	12	13	8
Potassium	ppm	ASTM D5185m	>20	27	55	72
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.9	1.1
Nitration	Abs/cm	*ASTM D7624	>20	16.0	16.4	16.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	31.3	34.5	34.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	4	6
Boron	ppm	ASTM D5185m	250	20	16	16
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	68	71	59
Manganese	ppm	ASTM D5185m		1	2	2
Magnesium	ppm	ASTM D5185m	450	1254	1155	1035
Calcium	ppm	ASTM D5185m	3000	1015	988	1094
Phosphorus	ppm	ASTM D5185m	1150	1205	1098	1082
Zinc	ppm	ASTM D5185m	1350	1507	1400	1280
Sulfur	ppm	ASTM D5185m	4250	3945	4032	2797
Oxidation	Abs/.1mm	*ASTM D7414	>25	37.3	39.8	40.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	4.0	3.6	2.7
Visc @ 100°C	cSt	ASTM D445	10.9	11.9	11.6	12.4

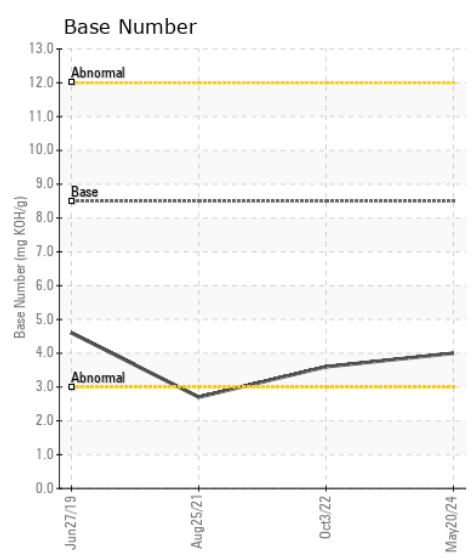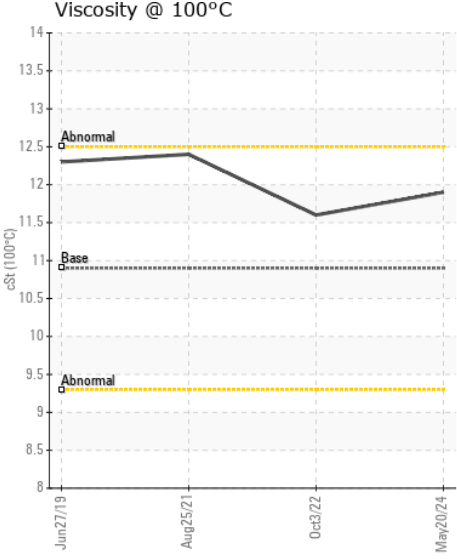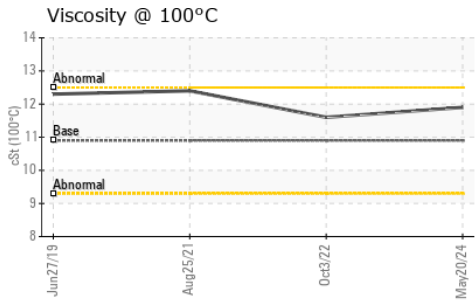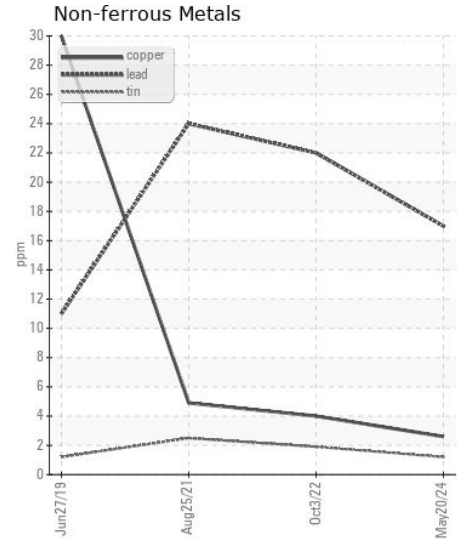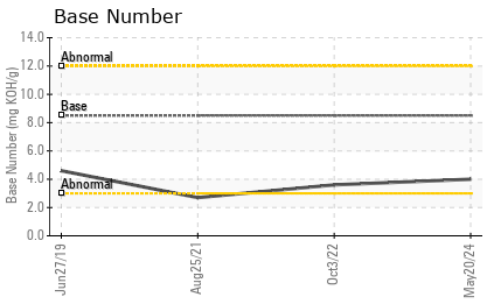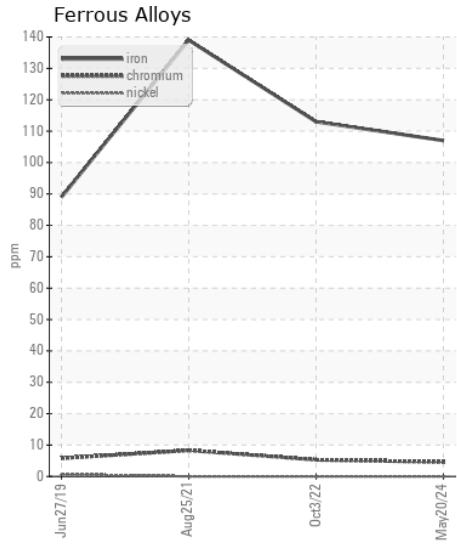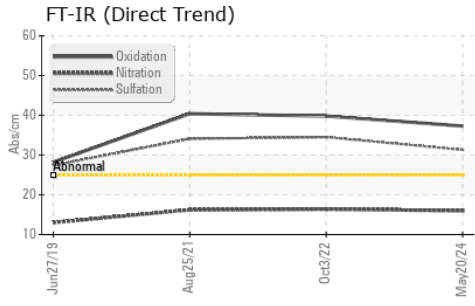

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : HRE0000228
Lab Number : 06193239
Unique Number : 11049991
Test Package : FLEET
Received : 28 May 2024
Tested : 30 May 2024
Diagnosed : 30 May 2024 - Sean Felton

MABE TRUCKING
 PO BOX 1081
 EDEN, NC
 US 27289

Contact: MAINTENANCE
 maintenancemanager@mabetrucking.com
 T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (336)635-1791