



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**828061**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0113942</b>	GFL0113933	GFL0113918
Sample Date		Client Info		<b>24 May 2024</b>	20 May 2024	27 Mar 2024
Machine Age	hrs	Client Info		<b>10005</b>	9974	9683
Oil Age	hrs	Client Info		<b>9683</b>	9683	9683
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>10</b>	12	19
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>4</b>	▲ 52	4
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	7	1
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.8</b>	0.7	1.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.2</b>	6.9	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.3</b>	17.9	19.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	6	3
Boron	ppm	ASTM D5185m	0	<b>12</b>	16	8
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	58	60
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>954</b>	834	943
Calcium	ppm	ASTM D5185m	1070	<b>1224</b>	1085	1115
Phosphorus	ppm	ASTM D5185m	1150	<b>1105</b>	958	1017
Zinc	ppm	ASTM D5185m	1270	<b>1401</b>	1218	1237
Sulfur	ppm	ASTM D5185m	2060	<b>3952</b>	3311	3565
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.9</b>	12.9	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.9</b>	7.7	6.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.2</b>	13.2	13.2


**FT-IR (Direct Trend)**

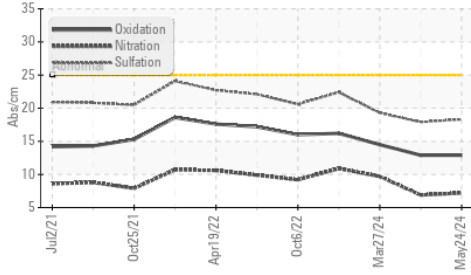


**Base Number**

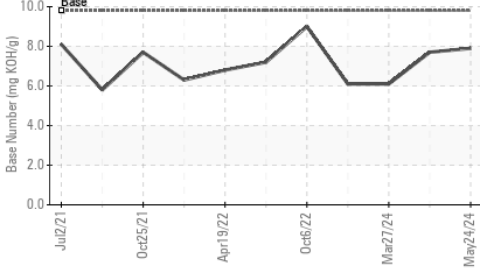


**Viscosity @ 100°C**

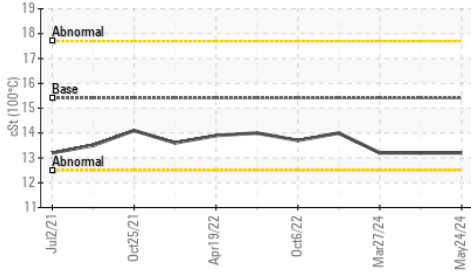


**Ferrous Alloys**

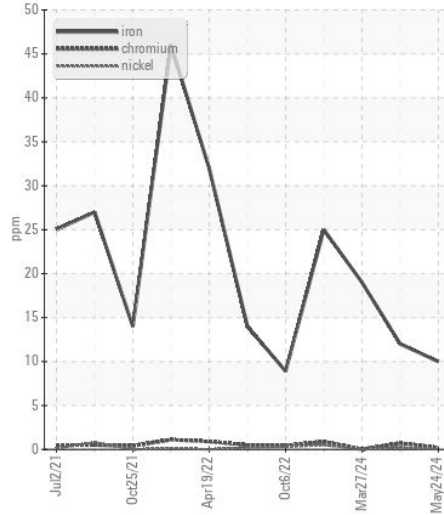


**Non-ferrous Metals**

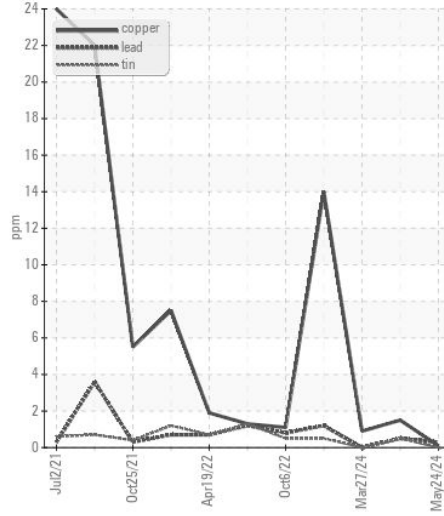

**Viscosity @ 100°C**

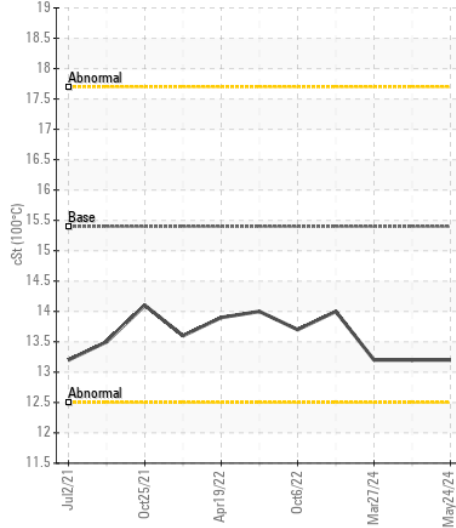

**Base Number**

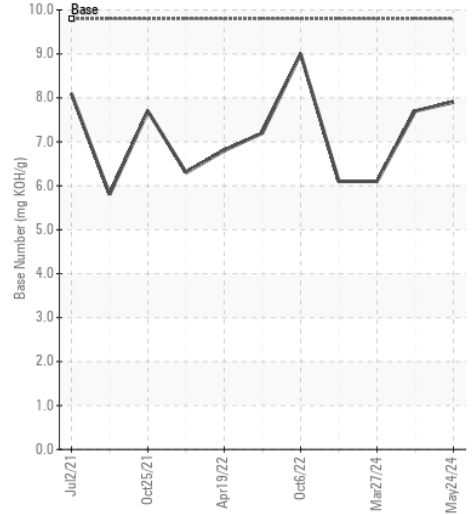

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0113942  
**Lab Number** : 06193251  
**Unique Number** : 11050003  
**Test Package** : FLEET

**Received** : 28 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Wes Davis

**GFL Environmental - 029 - Wytheville**  
 2390 North 4th Street  
 Wytheville, VA  
 US 24382

Contact: CHARLES CORVIN  
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (276)223-4476  
 F: (276)223-1283