



WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**

OIL ANALYSIS REPORT

Area

[PAC7025]

Machine Id

PETERBILT 496-479

Component

Diesel Engine

Fluid

CITGO CITGUARD 600 15W40 (48 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0004352	---	---
Sample Date		Client Info		14 May 2024	---	---
Machine Age	mls	Client Info		260784	---	---
Oil Age	mls	Client Info		13585	---	---
Filter Age	mls	Client Info		13585	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	13	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>150	1	---	---
Copper	ppm	ASTM D5185m	>90	0	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	4	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel		WC Method	>3.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>7.5	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.2	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	13	0	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	57	64	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	825	488	---	---
Calcium	ppm	ASTM D5185m	1100	2123	---	---
Phosphorus	ppm	ASTM D5185m	933	1252	---	---
Zinc	ppm	ASTM D5185m	1089	1557	---	---
Sulfur	ppm	ASTM D5185m	2769	4551	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	8.1	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	---	---

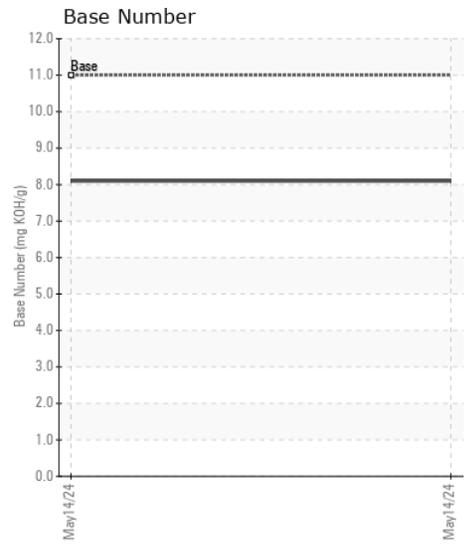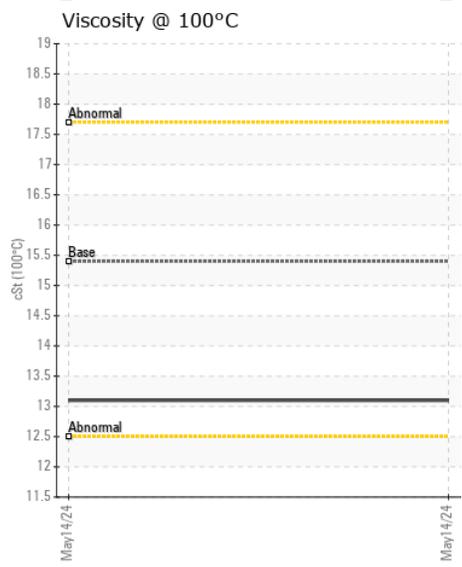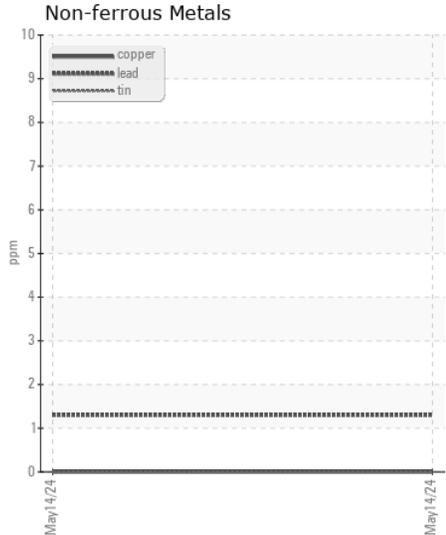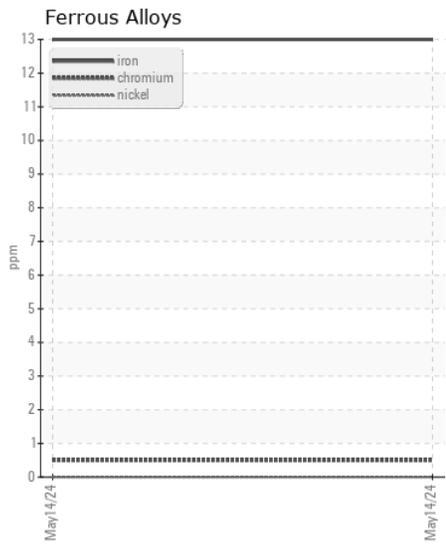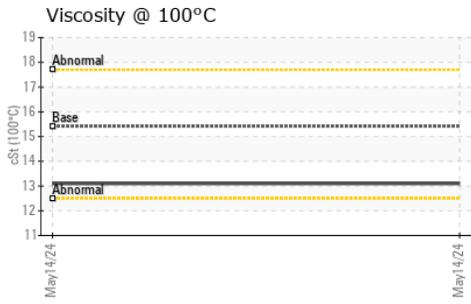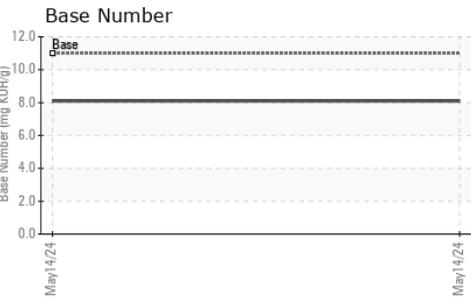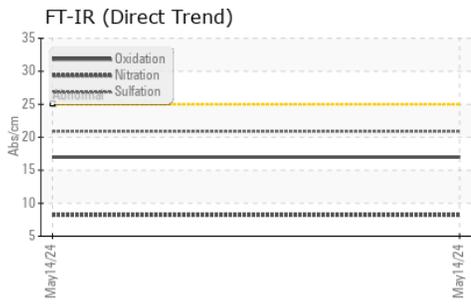

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0004352 **Received** : 28 May 2024
Lab Number : 06193314 **Tested** : 30 May 2024
Unique Number : 11050066 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : FLEET

RTL PACLEASE - 7025 - Tampa
 8109 East Adamo Drive
 Tampa, FL
 US 33619
 Contact: Michael Reid
 REIDM@RushEnterprises.com
 T: (813)371-2130
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)