



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR A944C 032403-194**  
Component  
**Diesel Engine**  
Fluid  
**CONOCO PHILLIPS GUARDOL ECT 15W40 (7 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0273214</b>	LH0273253	LH0244851
Sample Date		Client Info		<b>02 May 2024</b>	05 Mar 2024	09 Jan 2024
Machine Age	hrs	Client Info		<b>34868</b>	34555	34200
Oil Age	hrs	Client Info		<b>300</b>	250	250
Filter Age	hrs	Client Info		<b>300</b>	250	250
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>13</b>	12	6
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>9</b>	9	6
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>1</b>	<1	2
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>125	<b>2</b>	3	2
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	<b>6</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	<1	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>2.1</b>	1.9	1.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	7.8	6.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	20.5	19.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	1	1
Boron	ppm	ASTM D5185m	85	<b>50</b>	34	35
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>30</b>	33	37
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	350	<b>670</b>	594	632
Calcium	ppm	ASTM D5185m	1800	<b>1481</b>	1379	1328
Phosphorus	ppm	ASTM D5185m	1000	<b>1055</b>	990	1007
Zinc	ppm	ASTM D5185m	1100	<b>1239</b>	1141	1172
Sulfur	ppm	ASTM D5185m	3500	<b>3968</b>	3346	3268
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.9</b>	12.8	11.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.5	<b>7.9</b>	7.9	8.4
Visc @ 100°C	cSt	ASTM D445	15.3	<b>13.3</b>	13.3	13.1

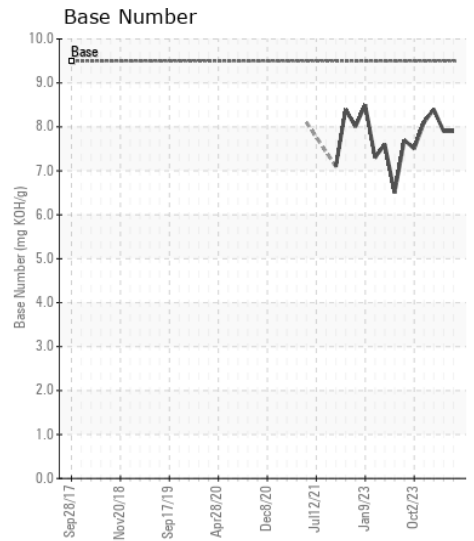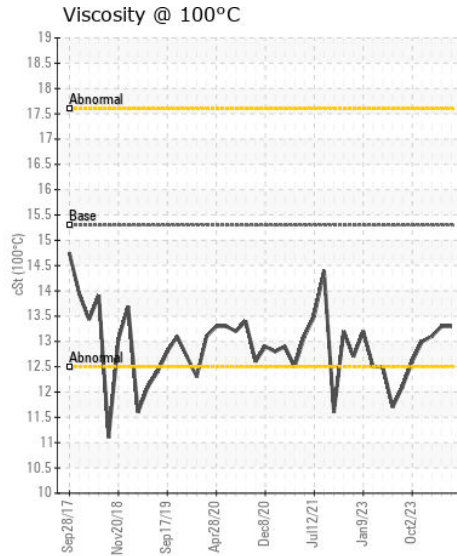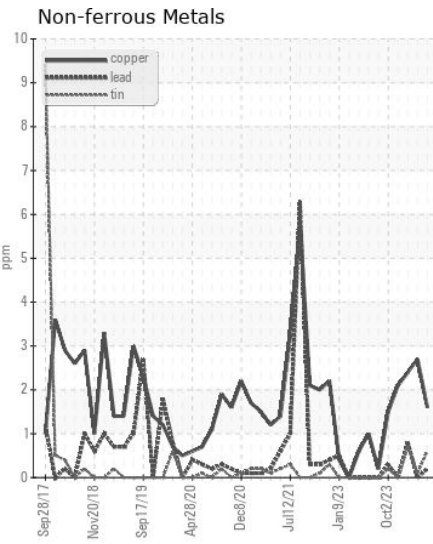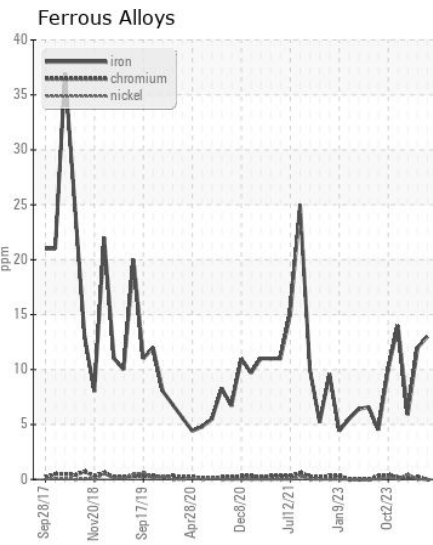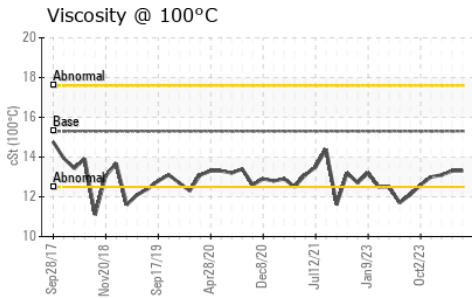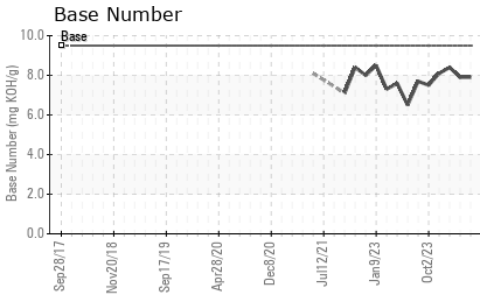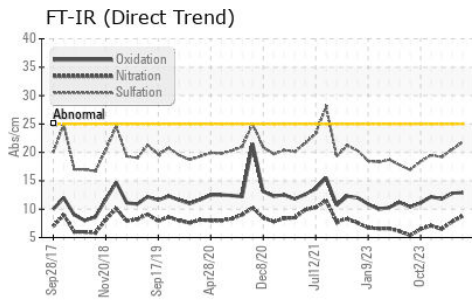

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LH0273214  
**Lab Number** : 06193386  
**Unique Number** : 11050138  
**Test Package** : CONST ( Additional Tests: TBN )

**NILES IRON & METAL CO. INC.**  
 P.O. BOX 166  
 NILES, OH  
 US 44446  
 Contact: CRAIG STINSON  
 cstinson529@gmail.com; canastasio@wearcheckusa.com  
 T: (330)652-2262  
 F: (330)652-1240

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)