

WEAR	
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id **55823** Component **Diesel Engine** Fluid **DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
RECOMMENDATION	Sample Number	00101	Client Info	LITTICAUT	DC0035957	,	DC0031778
Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Sample Date		Client Info		13 May 2024	11 Dec 2023	05 Oct 2023
	Machine Age	hrs	Client Info		2458	2232	1932
	Oil Age	hrs	Client Info		0	150	0
	Filter Age	hrs	Client Info		0	0	0
	Oil Changed		Client Info		Changed	Changed	Changed
	Filter Changed		Client Info		Changed	Changed	Changed
	Sample Status				NORMAL	NORMAL	NORMAL
				400	_		
WEAR All component wear rates are normal.	Iron	ppm	ASTM D5185m		7	8	7
	Chromium	ppm	ASTM D5185m		0	<1	<1
	Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
	Titanium	ppm	ASTM D5185m	0	0	0	<1
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m		2		2
	Lead	ppm	ASTM D5185m		<1 3	0	0 5
	Copper Tin	ppm	ASTM D5185m ASTM D5185m			0	5 <1
	Vanadium	ppm	ASTM D5185m	>15	<1 0	0	0
	White Metal	ppm scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
		Scalai	visuai		E	NONL	NONL
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	4	3	4
There is no indication of any contamination in the oil.	Potassium	ppm	ASTM D5185m	>20	3	2	3
	Fuel		WC Method	>5	<1.0	<1.0	<1.0
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method		NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
	Nitration	Abs/cm	*ASTM D7624	>20	7.6	7.7	7.4
	Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	19.3	18.1
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>158	2	2	2
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Boron		ASTM D5185m		2	<1	1
	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m		4	3	1
	Manganese	ppm	ASTM D5185m		<1	0	<1
	Magnesium	ppm	ASTM D5185m	450	68	45	47
	Calcium	ppm	ASTM D5185m		2429	2229	2293
	Phosphorus	ppm	ASTM D5185m		953	888	943
	Zinc	ppm	ASTM D5185m		1128	1055	1148
	Sulfur	ppm	ASTM D5185m		4248	3867	3888
	Oxidation	Abs/.1mm	*ASTM D7414	>25	11.1	12.3	11.3

Base Number (BN) mg KOH/g ASTM D2896 8.5

ASTM D445 14.4

Visc @ 100°C cSt

6.5


13.9


6.3


13.8

6.9

13.7

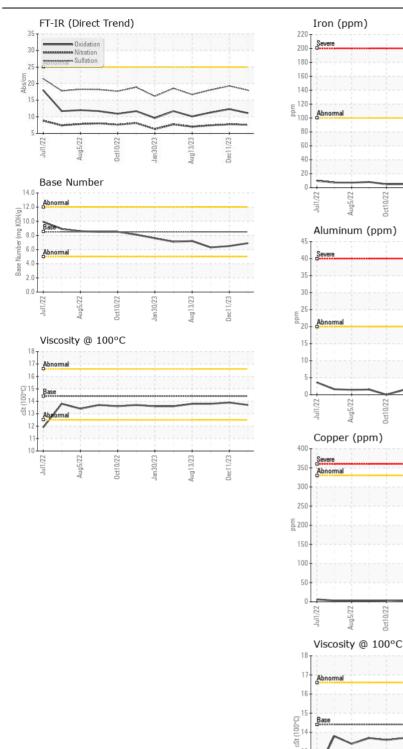

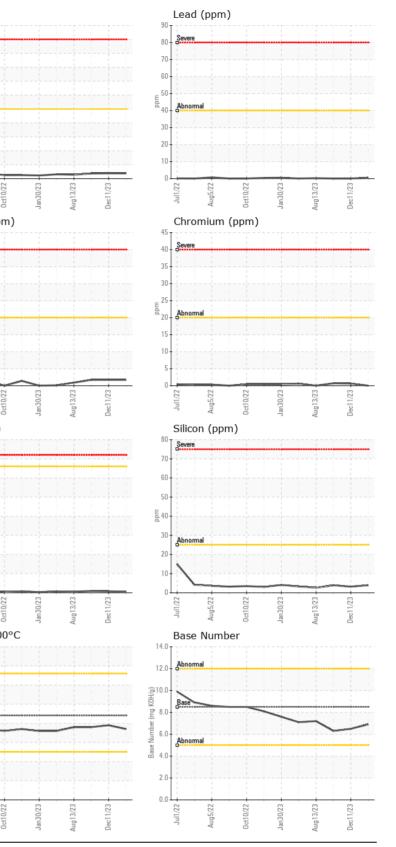

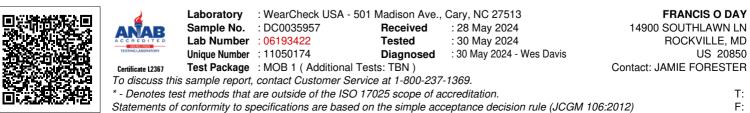

10

Aug5/22.

Contact/Location: JAMIE FORESTER - FRAROCDC Page 2 of 2