



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**8412560**  
 Component  
**Diesel Engine**  
 Fluid  
**VALVOLINE 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>IL0036650</b>	IL0028462	---
Sample Date		Client Info		<b>09 May 2024</b>	15 Feb 2024	---
Machine Age	mls	Client Info		<b>245888</b>	16571	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Filter Age	mls	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changed	---
Filter Changed		Client Info		<b>Changed</b>	Not Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>18</b>	20	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	9	---
Lead	ppm	ASTM D5185m	>40	<b>3</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>6</b>	1	---
Tin	ppm	ASTM D5185m	>15	<b>2</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>11</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>25</b>	10	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	8.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.2</b>	19.9	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	0	---
Boron	ppm	ASTM D5185m	39	<b>38</b>	73	---
Barium	ppm	ASTM D5185m	1	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	49	<b>51</b>	77	---
Manganese	ppm	ASTM D5185m	1	<b>1</b>	<1	---
Magnesium	ppm	ASTM D5185m	616	<b>723</b>	1012	---
Calcium	ppm	ASTM D5185m	1554	<b>1238</b>	1533	---
Phosphorus	ppm	ASTM D5185m	899	<b>786</b>	1014	---
Zinc	ppm	ASTM D5185m	1069	<b>928</b>	1152	---
Sulfur	ppm	ASTM D5185m	2624	<b>2914</b>	3396	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.4</b>	16.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.9	<b>7.7</b>	8.3	---
Visc @ 100°C	cSt	ASTM D445	13.6	<b>12.9</b>	12.9	---

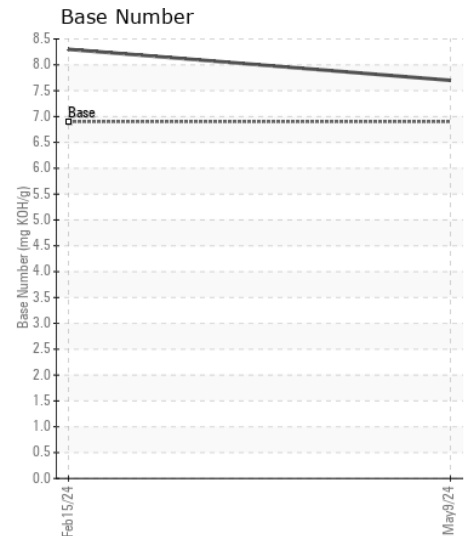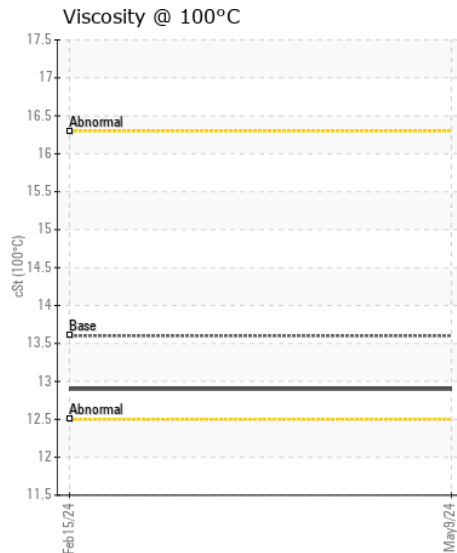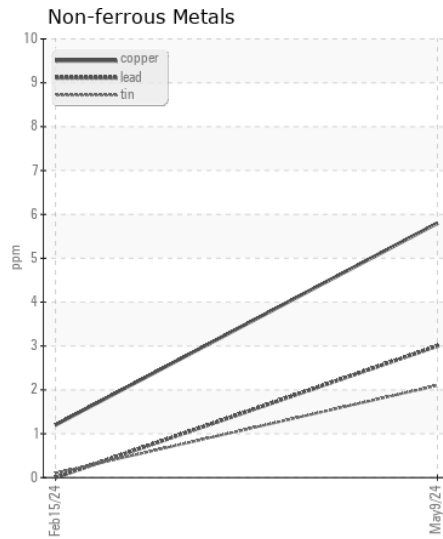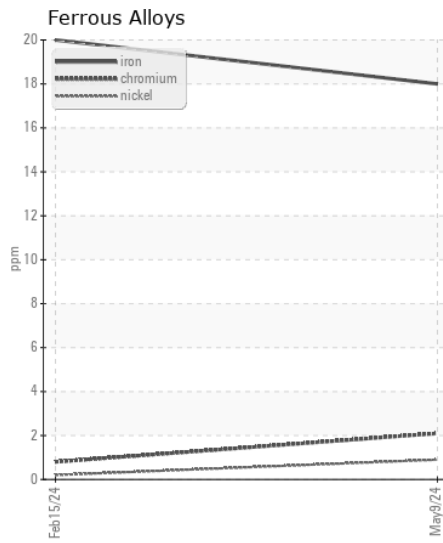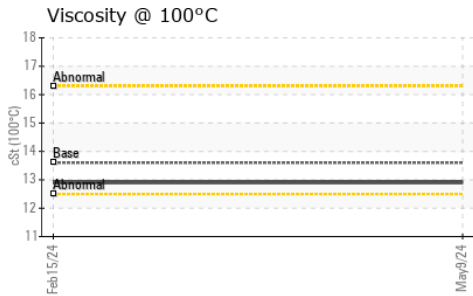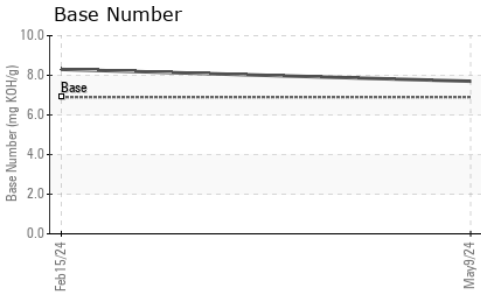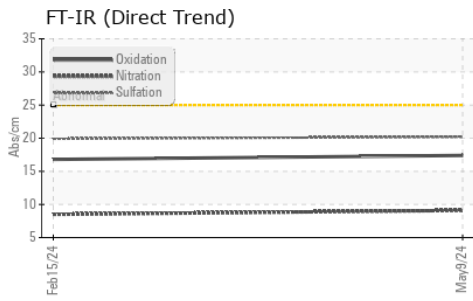

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : IL0036650

**Lab Number** : 06193599

**Unique Number** : 11050351

**Test Package** : FLEET

**Received** : 29 May 2024

**Tested** : 30 May 2024

**Diagnosed** : 30 May 2024 - Wes Davis

**TAMPA IDEALEASE**

5951 ORIENT ROAD

TAMPA, FL

US 33610-9565

Contact: Russ Cook

russcook@idealease.com

T: (813)626-9285

F: (844)270-1356

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)