



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Store 9 - Marietta**

Machine Id  
**KENWORTH 75**

Component  
**Diesel Engine**

Fluid  
**SHELL ROTELLA T 15W40 (10 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0050627</b>	LEC0049215	LEC0047093
Sample Date		Client Info		<b>15 May 2024</b>	02 Apr 2024	30 Jan 2024
Machine Age	hrs	Client Info		<b>10678</b>	10247	9761
Oil Age	hrs	Client Info		<b>400</b>	400	400
Filter Age	hrs	Client Info		<b>400</b>	400	400
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>34</b>	39	20
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	3	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>3</b>	4	0
Silver	ppm	ASTM D5185m	>3	<b>1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	5	4
Lead	ppm	ASTM D5185m	>40	<b>8</b>	19	19
Copper	ppm	ASTM D5185m	>330	<b>3</b>	3	<1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	<b>10</b>	8	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1.3</b>	1.4	1.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.6</b>	10.9	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.8</b>	26.2	27.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	<1
Boron	ppm	ASTM D5185m	316	<b>265</b>	246	237
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	1.2	<b>85</b>	121	135
Manganese	ppm	ASTM D5185m		<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m	24	<b>452</b>	723	680
Calcium	ppm	ASTM D5185m	2292	<b>1520</b>	1625	1555
Phosphorus	ppm	ASTM D5185m	1064	<b>977</b>	735	736
Zinc	ppm	ASTM D5185m	1160	<b>1175</b>	902	882
Sulfur	ppm	ASTM D5185m	4996	<b>3595</b>	2755	2392
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.9</b>	19.8	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>7.8</b>	8.3	8.5
Visc @ 100°C	cSt	ASTM D445	15.7	<b>14.2</b>	14.0	14.0

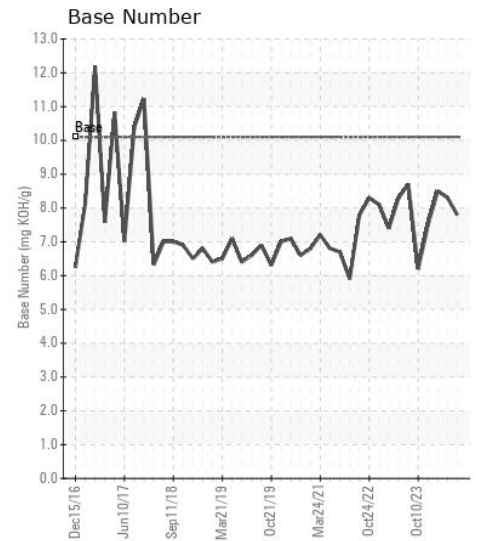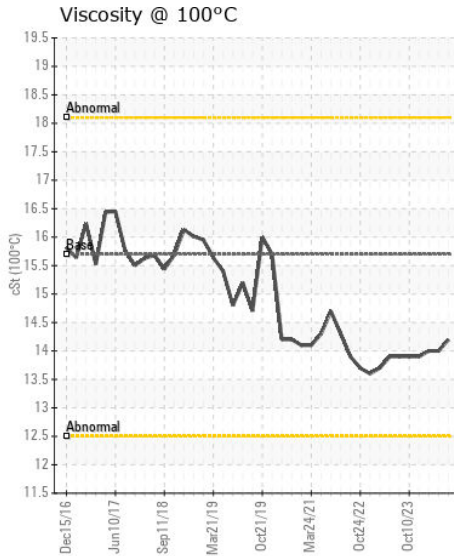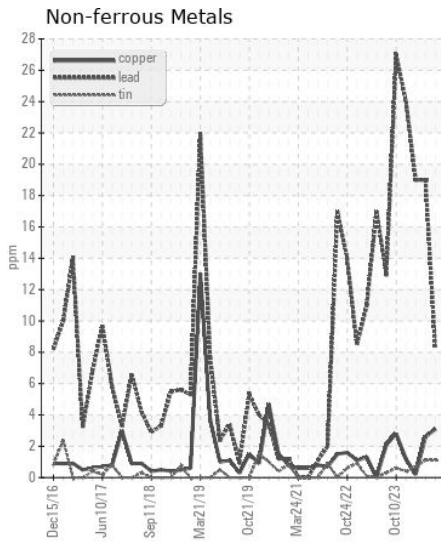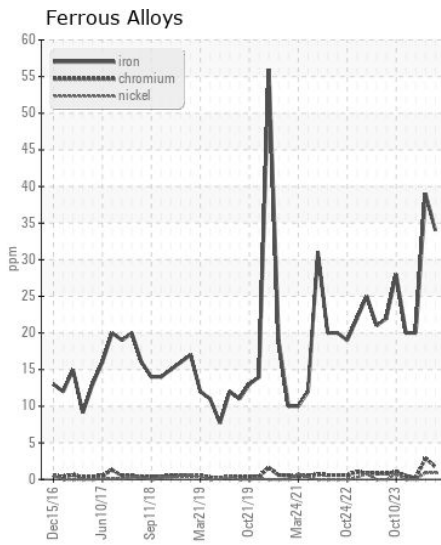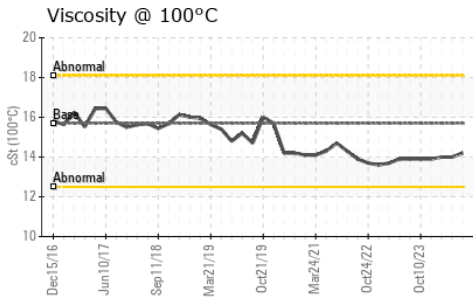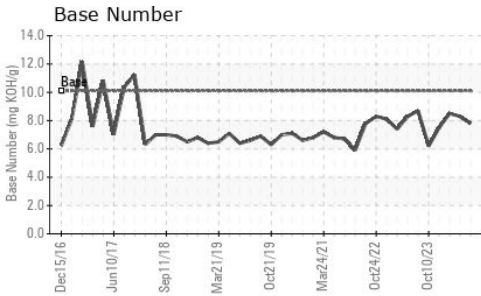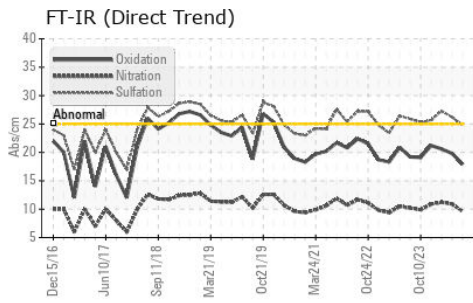

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0050627  
**Lab Number** : 06193627  
**Unique Number** : 11050379  
**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 29 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Sean Felton

**HALL DRILLING LLC**  
 PO BOX 249  
 ELLENBORO, WV  
 US 26346

Contact: CHRIS PETROVICH  
 chrispetrovich@halldrilling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (304)869-3404  
 F: (304)869-3408