



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SOLD LOCATIONS - LESCAM - CAMBRIDGE

Machine Id

1068

Component

Diesel Engine

Fluid

SHELL ROTELLA T 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050204	LEC0048655	LEC0048279
Sample Date		Client Info		18 May 2024	11 Apr 2024	07 Mar 2024
Machine Age	hrs	Client Info		34616	34066	33584
Oil Age	hrs	Client Info		400	400	400
Filter Age	hrs	Client Info		400	400	400
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	22	24	18
Chromium	ppm	ASTM D5185m	>20	2	3	2
Nickel	ppm	ASTM D5185m	>4	2	<1	0
Titanium	ppm	ASTM D5185m		2	2	3
Silver	ppm	ASTM D5185m	>3	1	0	0
Aluminum	ppm	ASTM D5185m	>20	4	6	3
Lead	ppm	ASTM D5185m	>40	4	3	3
Copper	ppm	ASTM D5185m	>330	4	7	14
Tin	ppm	ASTM D5185m	>15	2	2	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	10	18	▲ 32
Potassium	ppm	ASTM D5185m	>20	2	4	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.1	7.8	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	22.6	21.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	4	4
Boron	ppm	ASTM D5185m	316	320	438	208
Barium	ppm	ASTM D5185m	0.0	0	0	15
Molybdenum	ppm	ASTM D5185m	1.2	88	139	90
Manganese	ppm	ASTM D5185m		1	<1	4
Magnesium	ppm	ASTM D5185m	24	476	735	606
Calcium	ppm	ASTM D5185m	2292	1485	2258	2110
Phosphorus	ppm	ASTM D5185m	1064	996	1477	824
Zinc	ppm	ASTM D5185m	1160	1203	1672	964
Sulfur	ppm	ASTM D5185m	4996	3665	4536	3527
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	16.6	15.1
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	7.0	7.7	8.8
Visc @ 100°C	cSt	ASTM D445	15.7	13.1	12.9	12.8

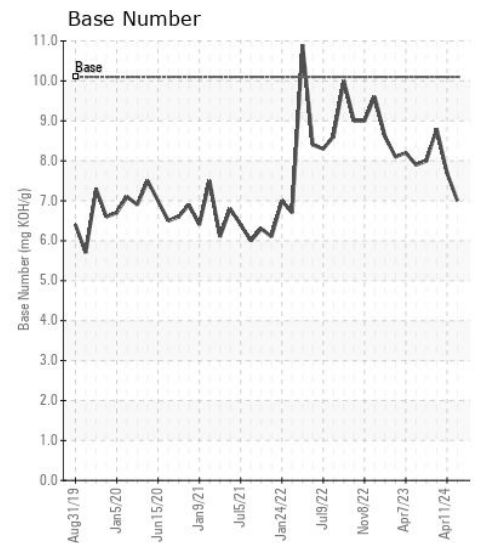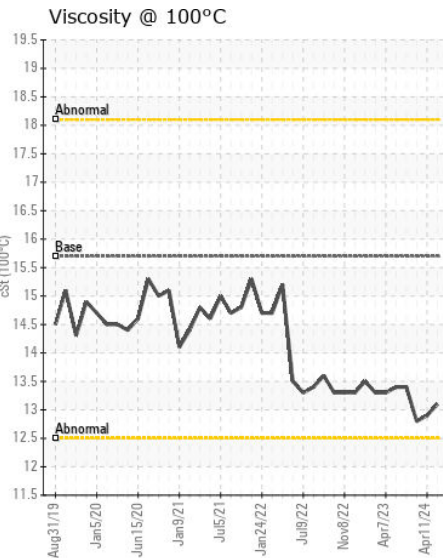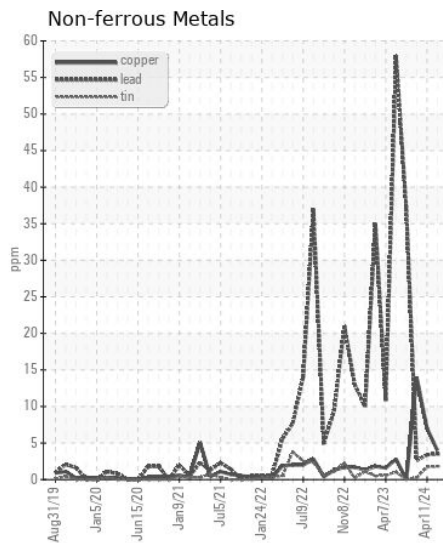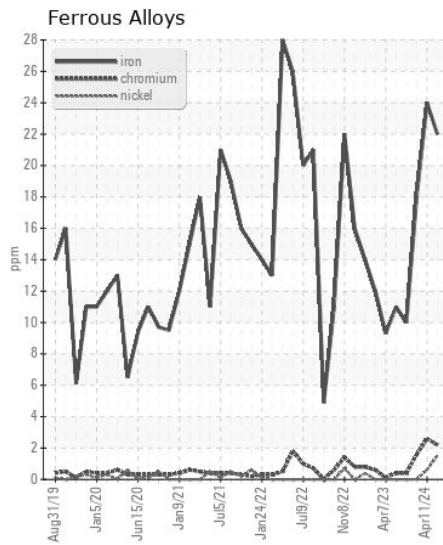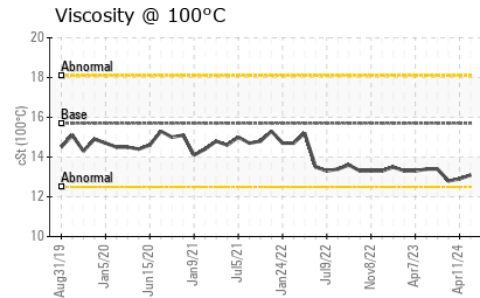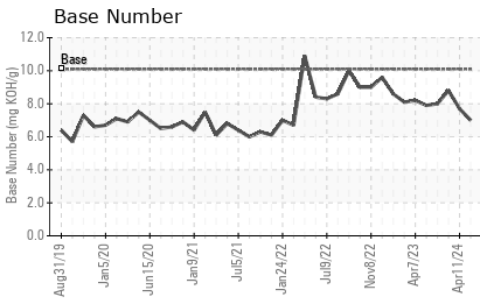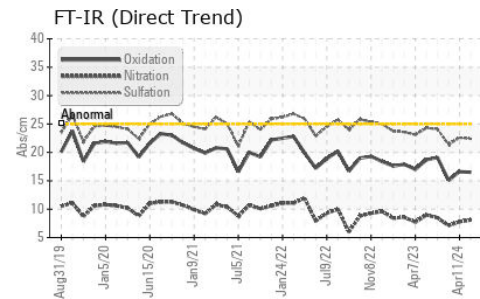

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050204 **Received** : 29 May 2024
Lab Number : 06193642 **Tested** : 30 May 2024
Unique Number : 11050394 **Diagnosed** : 30 May 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

HALL DRILLING LLC
 PO BOX 249
 ELLENBORO, WV
 US 26346

Contact: CHRIS PETROVICH
 chrispetrovich@halldrilling.com
 T: (304)869-3404
 F: (304)869-3408

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)