



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[25525]

Machine Id

VOLVO A25G 752017

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP408293	VCP364898	VCP306681
Sample Date		Client Info		21 May 2024	05 Aug 2022	28 Jan 2021
Machine Age	hrs	Client Info		4245	2580	1249
Oil Age	hrs	Client Info		0	2000	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	19	10	13
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>10	3	<1	3
Titanium	ppm	ASTM D5185m		<1	<1	1
Silver	ppm	ASTM D5185m	>2	1	<1	<1
Aluminum	ppm	ASTM D5185m	>30	6	4	2
Lead	ppm	ASTM D5185m	>40	1	<1	0
Copper	ppm	ASTM D5185m	>20	12	3	▲ 104
Tin	ppm	ASTM D5185m	>20	1	1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	7	5	8
Potassium	ppm	ASTM D5185m	>20	3	1	14
Fuel		WC Method	>3.0	<1.0	<1.0	0.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	8.4	8.9	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	23.9	22.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	<1	3
Boron	ppm	ASTM D5185m	2.5	20	37	23
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.7	46	43	39
Manganese	ppm	ASTM D5185m	0.0	1	<1	1
Magnesium	ppm	ASTM D5185m	256	460	452	510
Calcium	ppm	ASTM D5185m	2057	1599	1550	1778
Phosphorus	ppm	ASTM D5185m	935	937	903	929
Zinc	ppm	ASTM D5185m	1223	1110	1058	1058
Sulfur	ppm	ASTM D5185m	4079	3331	2841	2403
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.7	21.6	19.7
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.7	10.6	---
Visc @ 100°C	cSt	ASTM D445	15.0	12.7	● 12.4	● 12.3

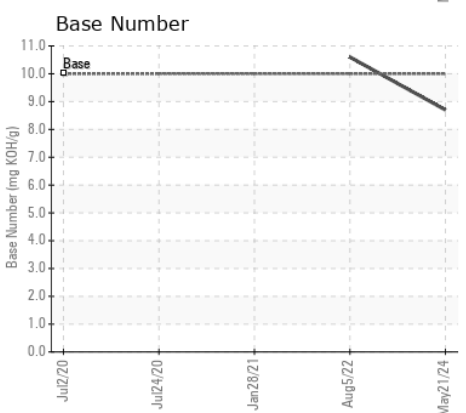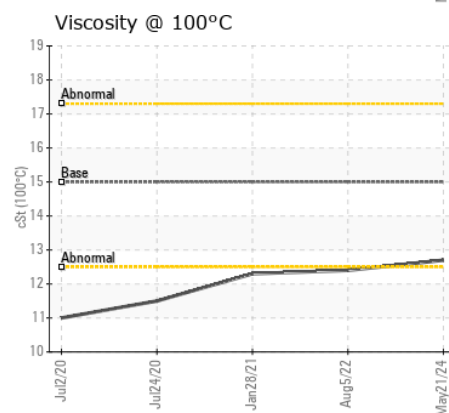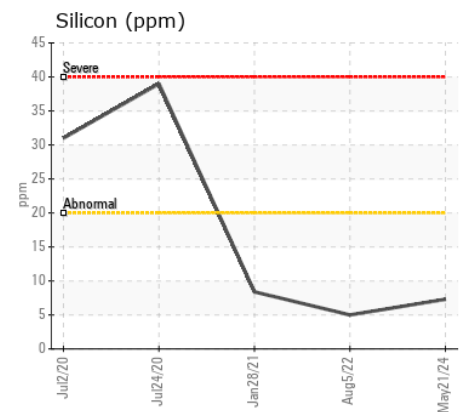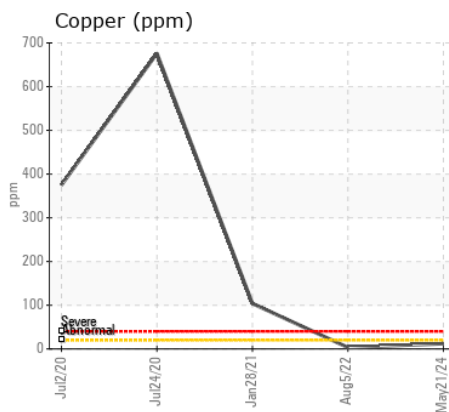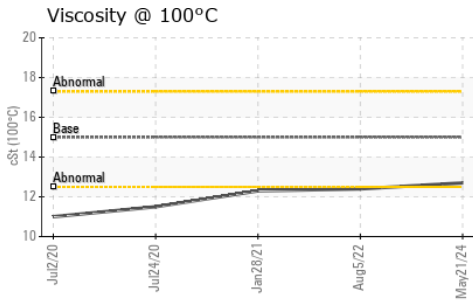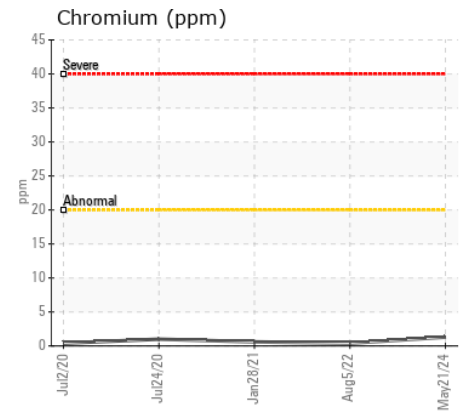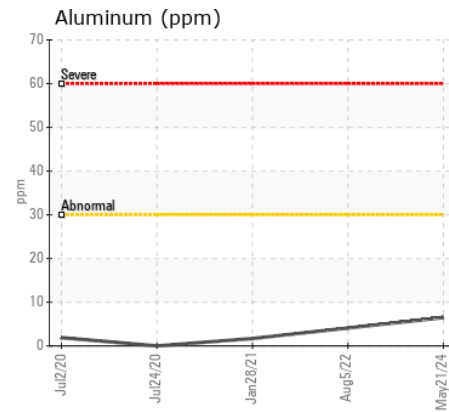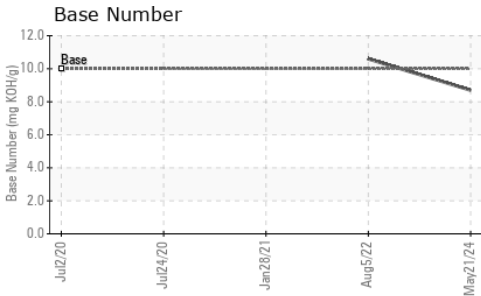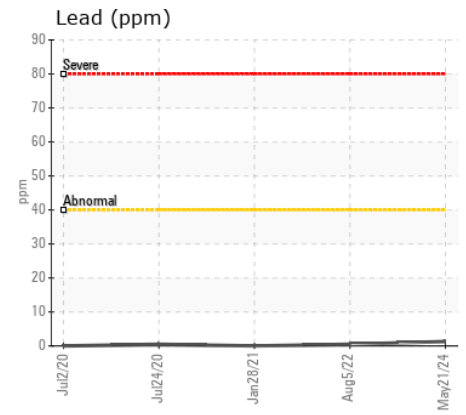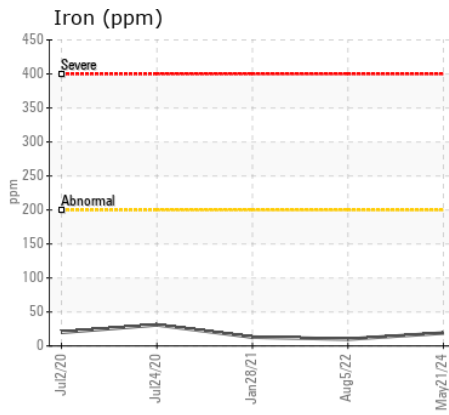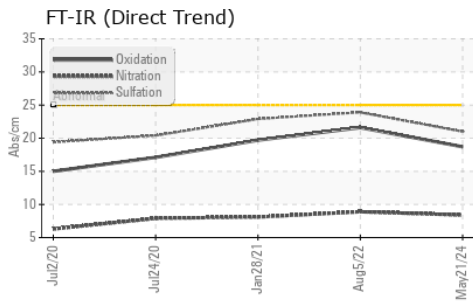

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP408293
Lab Number : 06193681
Unique Number : 11050433
Test Package : MOB 1 (Additional Tests: TBN)

218 - ASCENDUM MACHINERY INC - N. CHARLESTON
 7235 CROSS COUNTRY RD.
 NORTH CHARLESTON, SC
 US 29418
 Contact: MATT MITCHAM
 matt.mitcham@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (843)414-1129