



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO EC220EL 314125**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP423886</b>	VCP0004984	---
Sample Date		Client Info		<b>03 May 2024</b>	21 Nov 2022	---
Machine Age	hrs	Client Info		<b>2689</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>25</b>	62	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	2	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	4	---
Titanium	ppm	ASTM D5185m		<b>2</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>3</b>	5	---
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>15	<b>3</b>	3	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>7</b>	14	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	1	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	8.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	22.6	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>2</b>	3	---
Boron	ppm	ASTM D5185m	250	<b>382</b>	43	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	100	<b>77</b>	37	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m	450	<b>425</b>	536	---
Calcium	ppm	ASTM D5185m	3000	<b>1246</b>	1637	---
Phosphorus	ppm	ASTM D5185m	1150	<b>943</b>	742	---
Zinc	ppm	ASTM D5185m	1350	<b>1104</b>	909	---
Sulfur	ppm	ASTM D5185m	4250	<b>3360</b>	2842	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.6</b>	21.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.0</b>	10.9	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.6</b>	12.8	---

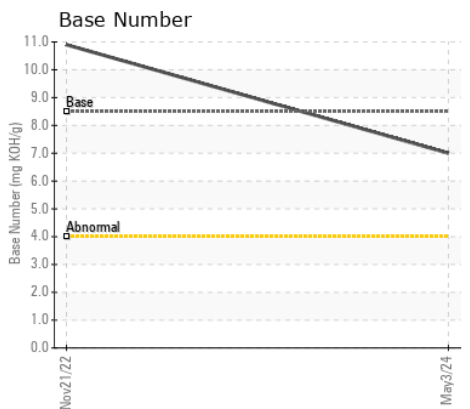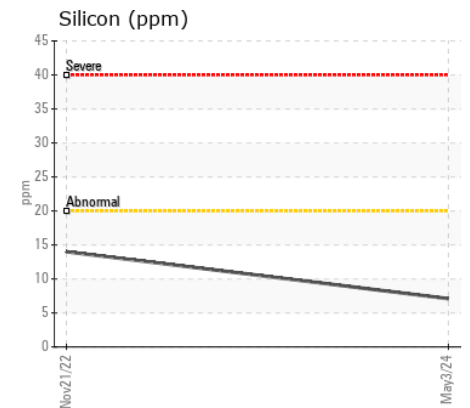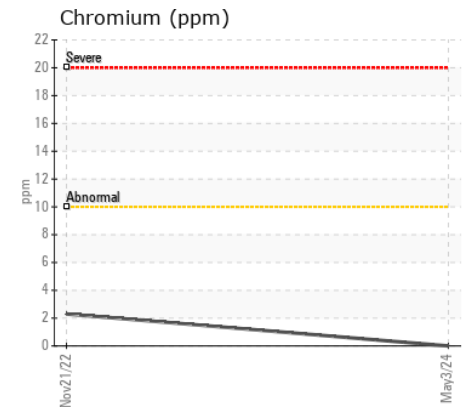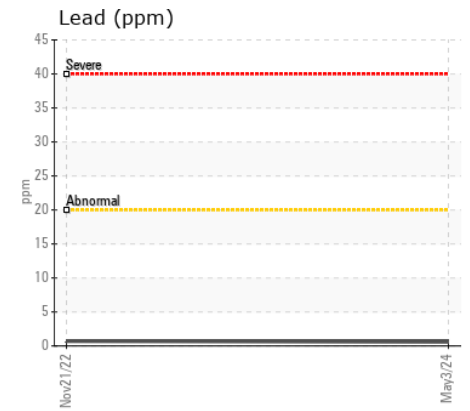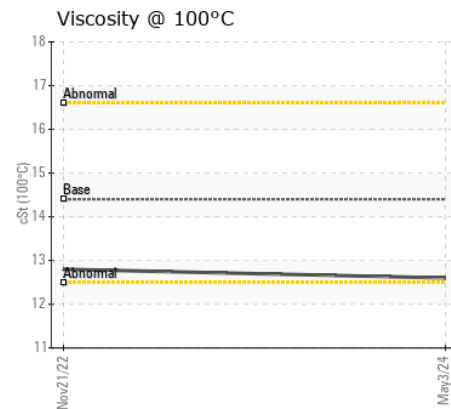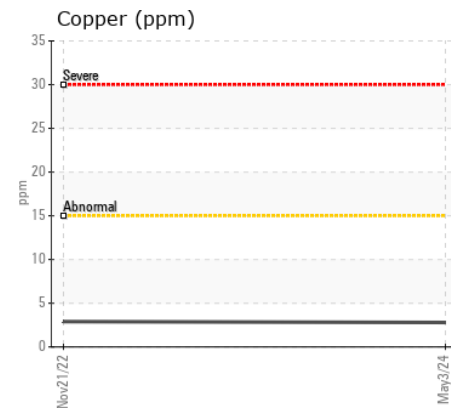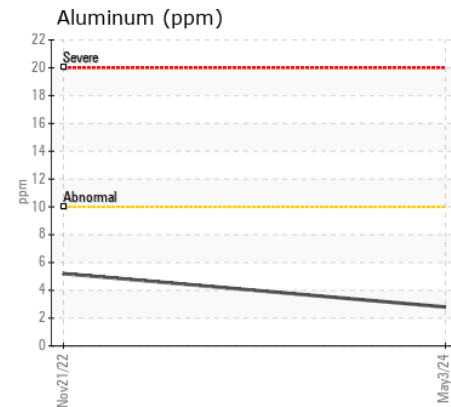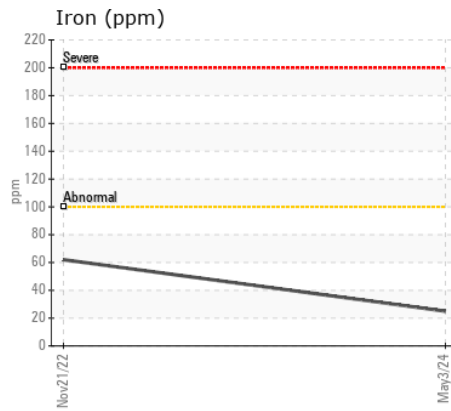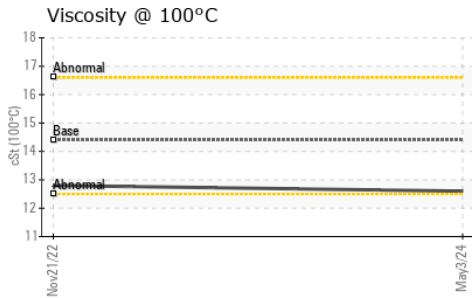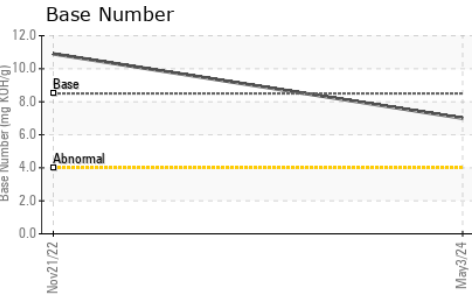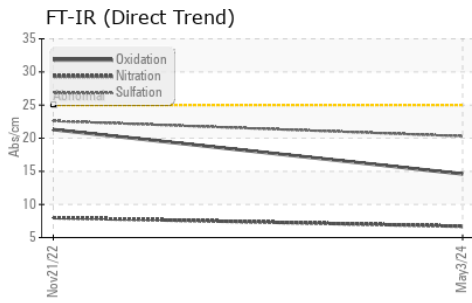

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP423886  
**Lab Number** : 06193697  
**Unique Number** : 11050449  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 29 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Wes Davis

**117 - ASCENDUM MACHINERY INC - GREENVILLE**  
 2002 N GREENE ST  
 GREENVILLE, NC  
 US 27834  
 Contact: GREG SUGGS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (252)754-5280  
 F: (704)494-8197