



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

MIKE WALLS

Machine Id

VOLVO PENTA 7009149668

Component

Port Diesel Engine

Fluid

VOLVO VDS-4.5 Premium Motor Oil 15W40 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA049993	---	---
Sample Date		Client Info		24 May 2024	---	---
Machine Age	hrs	Client Info		771	---	---
Oil Age	hrs	Client Info		2	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal. The wear metal levels do not reflect the reported loss of pressure.

Iron	ppm	ASTM D5185m	>80	2	---	---
Chromium	ppm	ASTM D5185m	>6	0	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>95	<1	---	---
Copper	ppm	ASTM D5185m	>85	1	---	---
Tin	ppm	ASTM D5185m	>9	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.8	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m		2	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		57	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		908	---	---
Calcium	ppm	ASTM D5185m		979	---	---
Phosphorus	ppm	ASTM D5185m		1023	---	---
Zinc	ppm	ASTM D5185m		1186	---	---
Sulfur	ppm	ASTM D5185m		3513	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.9	---	---
Visc @ 100°C	cSt	ASTM D445		13.1	---	---

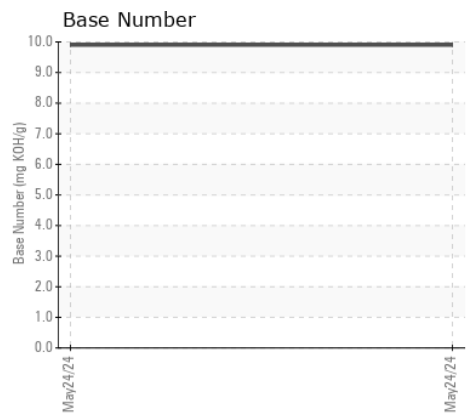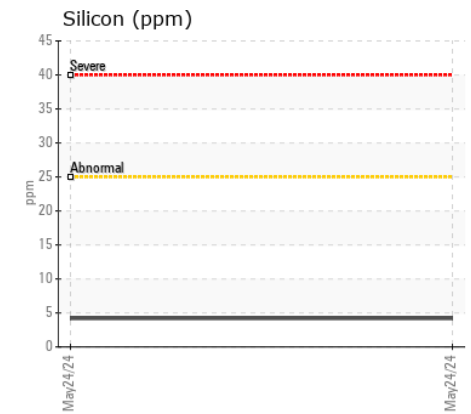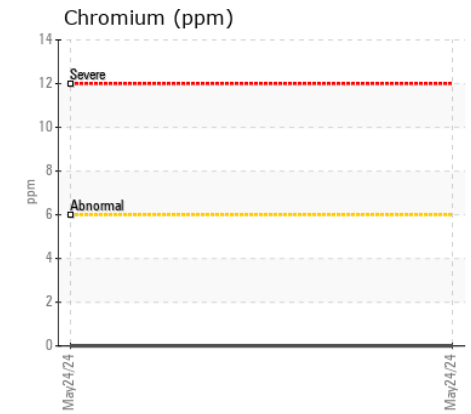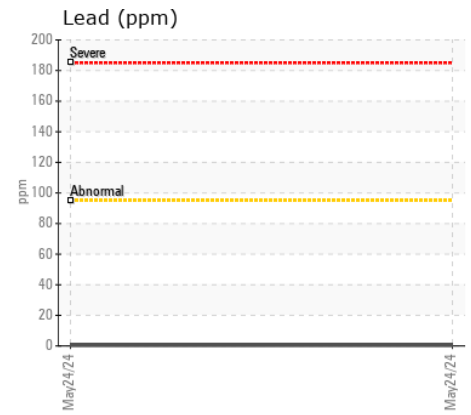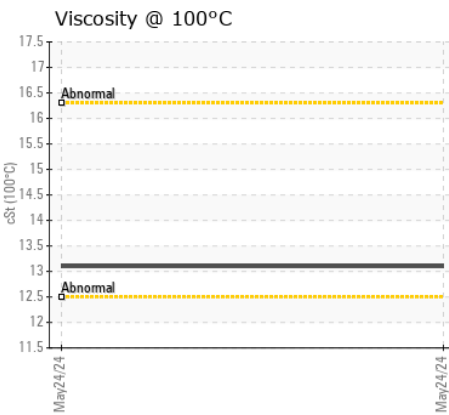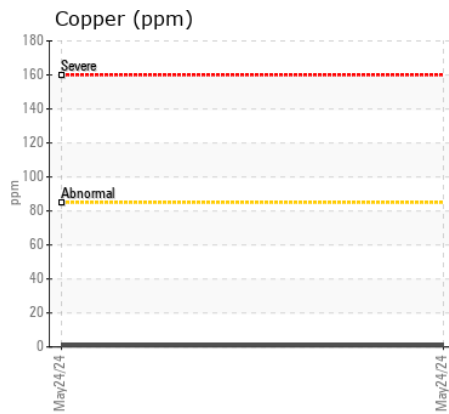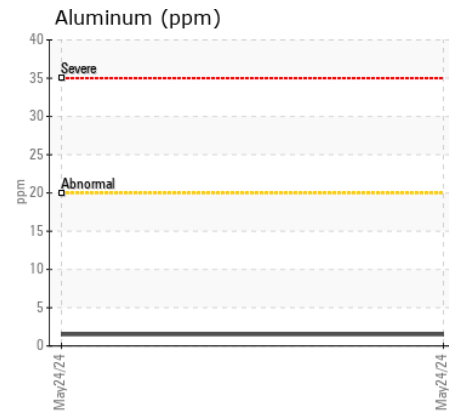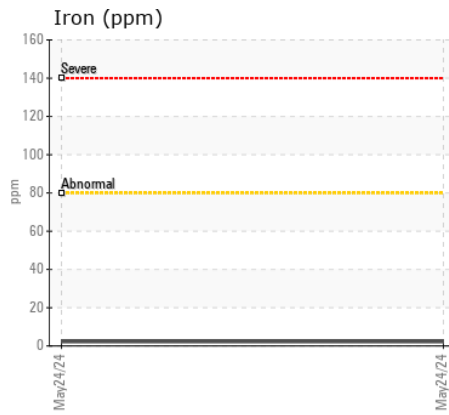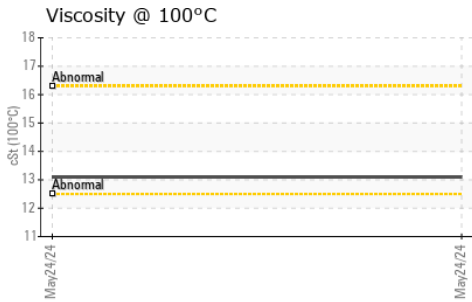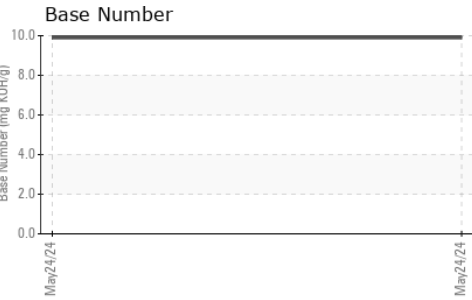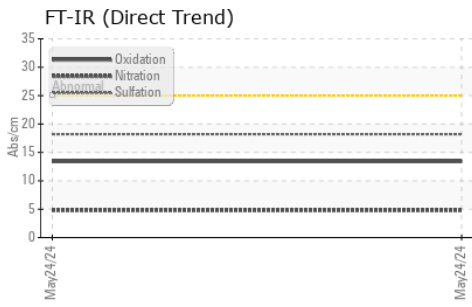

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA049993 **Received** : 29 May 2024
Lab Number : 06193723 **Tested** : 30 May 2024
Unique Number : 11050475 **Diagnosed** : 31 May 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: TBN)

Michigan Yachtcrafters Inc
 31785 S. River Road
 HARRISON TOWNSHIP, MI
 US 48045
 Contact: Garrett Cassidy
 michiganyachtservice@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: