



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[41850]

Machine Id

VOLVO A40G 352912

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP453843	VCP420563	---
Sample Date		Client Info		22 May 2024	17 Jul 2023	---
Machine Age	hrs	Client Info		4094	2926	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	5	---
Chromium	ppm	ASTM D5185m	>20	0	<1	---
Nickel	ppm	ASTM D5185m	>2	1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	0	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	2	18	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	3	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Fuel		WC Method	>6.0	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	7.2	6.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.9	17.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	1	---
Boron	ppm	ASTM D5185m	2.5	57	5	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.7	42	58	---
Manganese	ppm	ASTM D5185m	0.0	<1	<1	---
Magnesium	ppm	ASTM D5185m	256	518	985	---
Calcium	ppm	ASTM D5185m	2057	1650	1144	---
Phosphorus	ppm	ASTM D5185m	935	979	1040	---
Zinc	ppm	ASTM D5185m	1223	1112	1246	---
Sulfur	ppm	ASTM D5185m	4079	3395	3769	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.0	13.8	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.5	9.6	---
Visc @ 100°C	cSt	ASTM D445	15.0	12.7	13.3	---

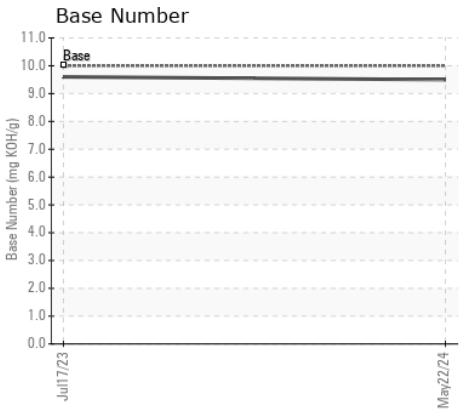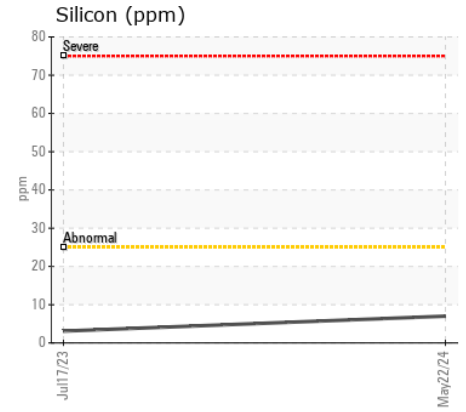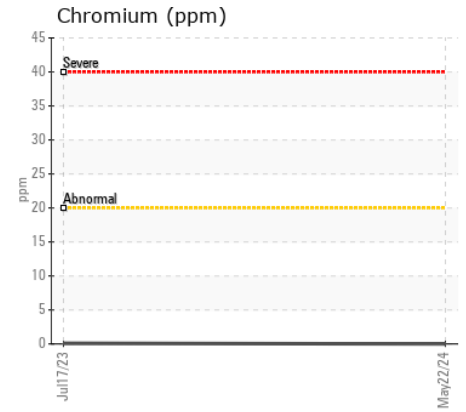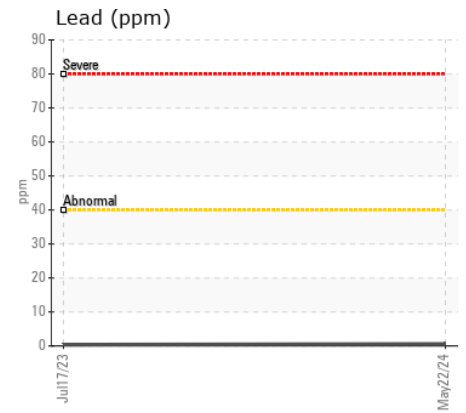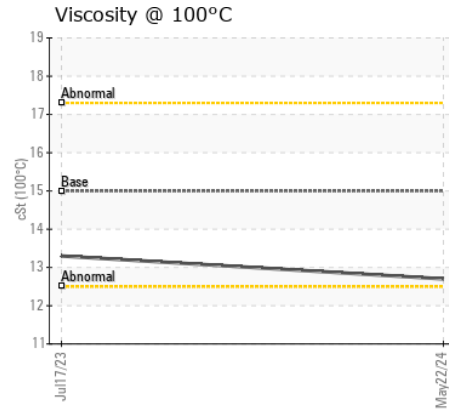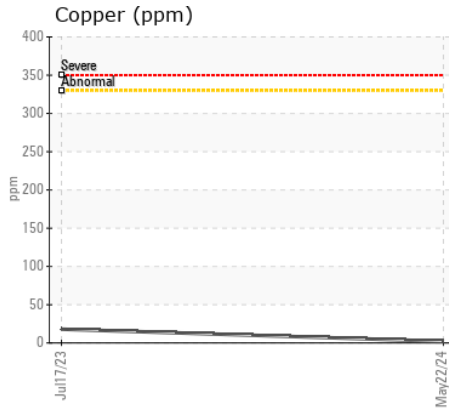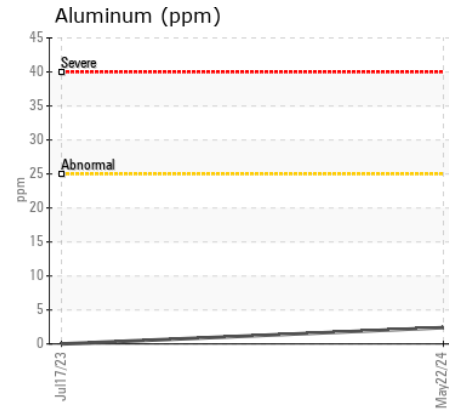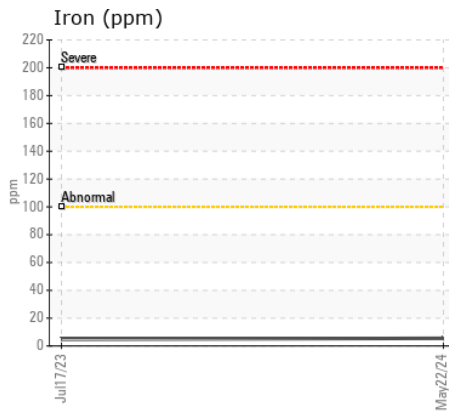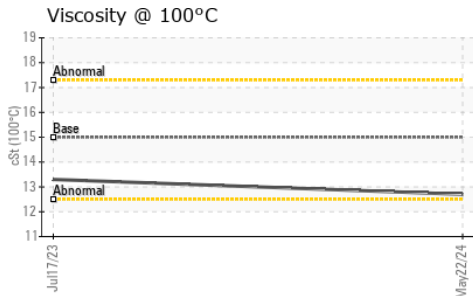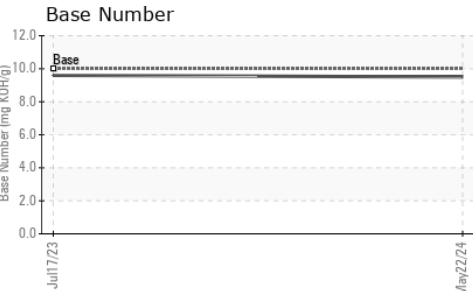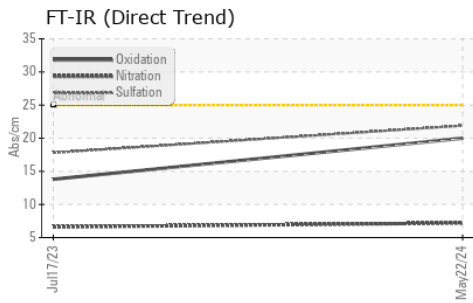

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP453843 **Received** : 29 May 2024
Lab Number : 06193725 **Tested** : 30 May 2024
Unique Number : 11050477 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

215 - ASCENDUM MACHINERY INC - CAYCE
 2303 AIRPORT BLVD
 CAYCE, SC
 US 29033
 Contact: TAMI BROWDER
 tami.browder@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (803)923-2138
 F: (803)791-9920