



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**TB FORKLIFT**  
Machine Id  
**61085**  
Component  
**Propane Engine**  
Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0939962	---	---
Sample Date		Client Info		15 May 2024	---	---
Machine Age	hrs	Client Info		6390	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	---	---
Chromium	ppm	ASTM D5185m	>25	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	3	---	---
Lead	ppm	ASTM D5185m	>25	<1	---	---
Copper	ppm	ASTM D5185m	>35	<1	---	---
Tin	ppm	ASTM D5185m	>8	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	8	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.7	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	13.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		12	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		29	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		412	---	---
Calcium	ppm	ASTM D5185m		995	---	---
Phosphorus	ppm	ASTM D5185m		550	---	---
Zinc	ppm	ASTM D5185m		654	---	---
Sulfur	ppm	ASTM D5185m		2151	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	6.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.5	---	---
Visc @ 100°C	cSt	ASTM D445		10.3	---	---

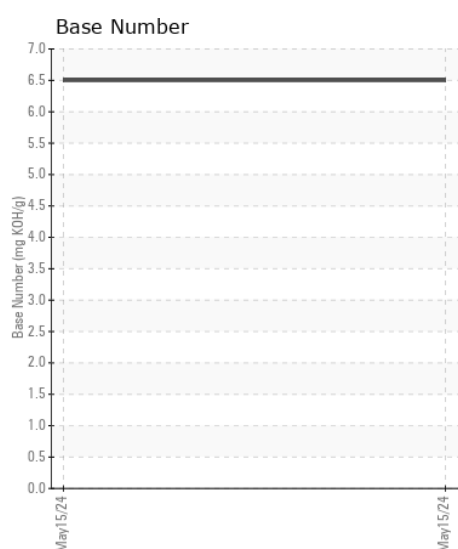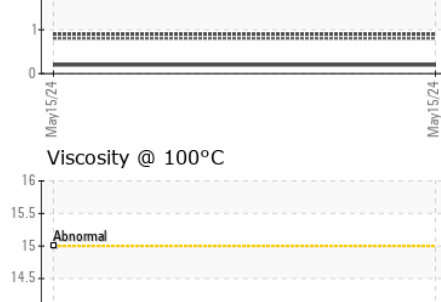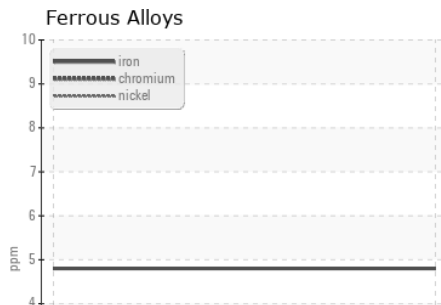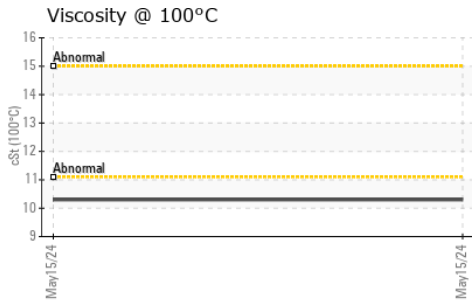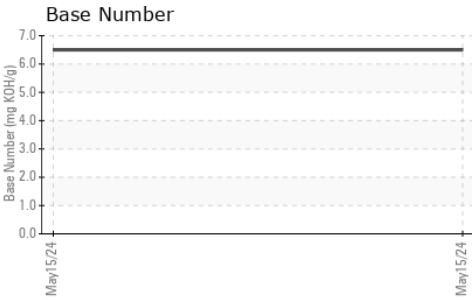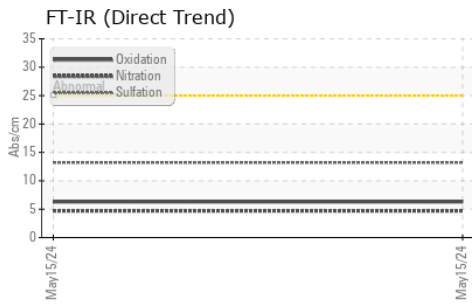

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0939962 **Received** : 29 May 2024  
**Lab Number** : 06193806 **Tested** : 30 May 2024  
**Unique Number** : 11055929 **Diagnosed** : 31 May 2024 - Angela Borella  
**Test Package** : CONST

**FORKLIFT SELECT**  
 12875 E 42ND AVE, SUITE 50  
 DENVER, CO  
 US 80239  
 Contact: BYRON CHAPUIS  
 BYRON@FORKLIFTSELECT.COM  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)