



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ABNORMAL

Machine Id
FORD 1091 (S/N 1FMJU1RG5PEA19280)
 Component
Main Engine
 Fluid
GASOLINE ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TLY0002334	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	mls	Client Info		30830	---	---
Oil Age	mls	Client Info		30830	---	---
Filter Age	mls	Client Info		30830	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	19	---	---
Chromium	ppm	ASTM D5185m	>8	<1	---	---
Nickel	ppm	ASTM D5185m	>2	0	---	---
Titanium	ppm	ASTM D5185m	>3	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>15	4	---	---
Lead	ppm	ASTM D5185m	>18	<1	---	---
Copper	ppm	ASTM D5185m	>80	5	---	---
Tin	ppm	ASTM D5185m	>14	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









There is a moderate amount of fuel present in the oil.

Silicon	ppm	ASTM D5185m	>20	30	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel	%	ASTM D3524	>4.0	▲ 5.8	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	14.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The BN level is low.

Sodium	ppm	ASTM D5185m	>75	4	---	---
Boron	ppm	ASTM D5185m	75	21	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	100	85	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m	12	522	---	---
Calcium	ppm	ASTM D5185m	2100	921	---	---
Phosphorus	ppm	ASTM D5185m	650	555	---	---
Zinc	ppm	ASTM D5185m	850	648	---	---
Sulfur	ppm	ASTM D5185m	2500	2478	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		▲ 2.9	---	---
Visc @ 100°C	cSt	ASTM D445	10.9	▲ 9.0	---	---

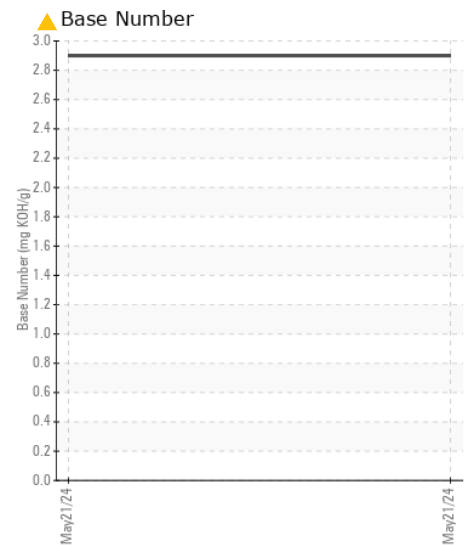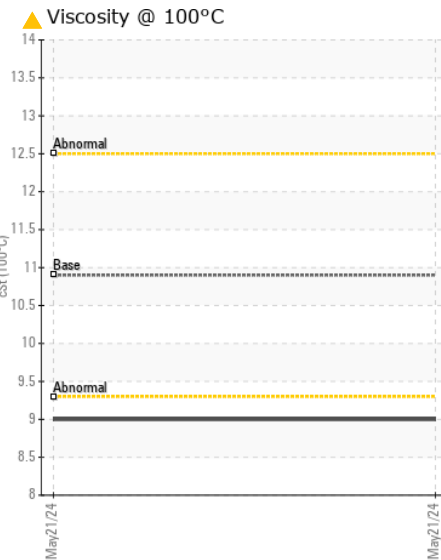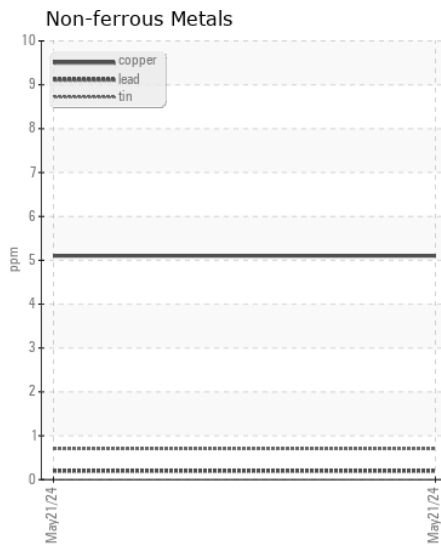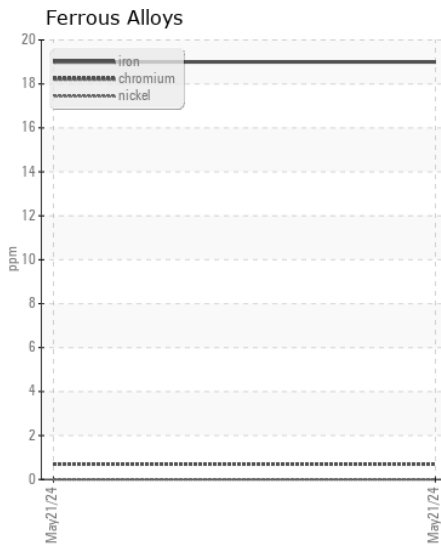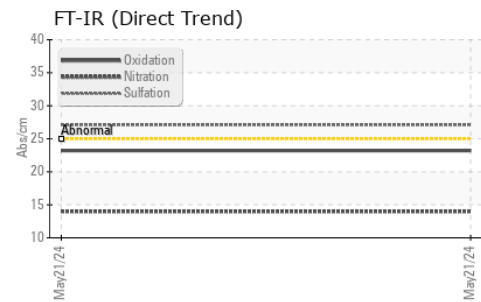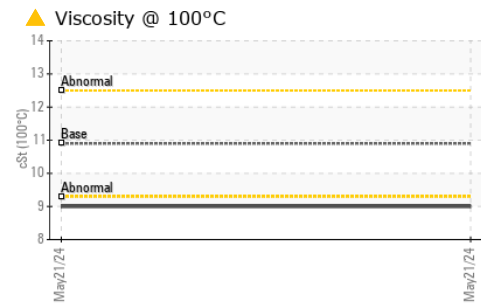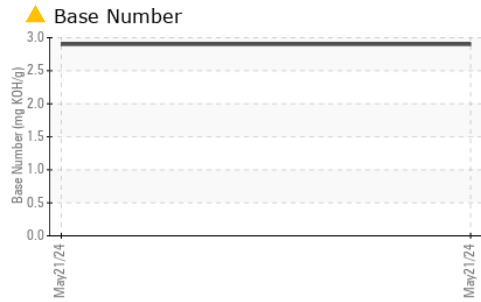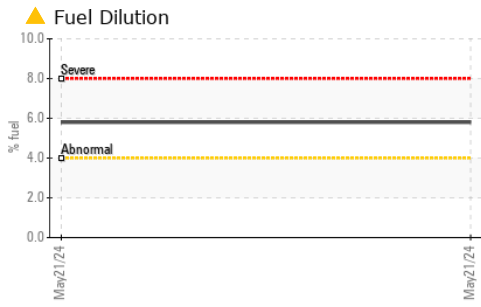

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLY0002334 **Received** : 29 May 2024
Lab Number : 06193808 **Tested** : 03 Jun 2024
Unique Number : 11055931 **Diagnosed** : 03 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

GAINES & COMPANY
 112 WESTMINSTER RD
 REISTERSTOWN, MD
 US 21136

Contact: LANCE TANCRAITOR
 ltancraitor@gainesandco.com
 T: (410)833-9833

F: