



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Area
Store 4 - Fairmont [RO# 151313]
Machine Id
JOHN DEERE 135P 1FF135PAAPF001151
Component
Hydraulic System
Fluid
HITACHI HYDRAULIC SUPER EX 46HN (33 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | LEC0048288 | --- | --- |
| Sample Date | | Client Info | | 23 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 26 | --- | --- |
| Oil Age | hrs | Client Info | | 26 | --- | --- |
| Filter Age | hrs | Client Info | | 26 | --- | --- |
| Oil Changed | | Client Info | | Not Chngd | --- | --- |
| Filter Changed | | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|------|-----|-----|
| PQ | | ASTM D8184 | >50 | 13 | --- | --- |
| Iron | ppm | ASTM D5185m | >32 | 1 | --- | --- |
| Chromium | ppm | ASTM D5185m | >9 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | >5 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >9 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m | >28 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >50 | 2 | --- | --- |
| Tin | ppm | ASTM D5185m | >5 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

| | | | | | | |
|------------------|--------|--------------|-----------|----------|-----|-----|
| Silicon | ppm | ASTM D5185m | >11 | 1 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Water | | WC Method | >0.075 | NEG | --- | --- |
| Particles >4µm | | ASTM D7647 | >80000 | 12455 | --- | --- |
| Particles >6µm | | ASTM D7647 | >20000 | 3285 | --- | --- |
| Particles >14µm | | ASTM D7647 | >640 | 345 | --- | --- |
| Particles >21µm | | ASTM D7647 | >160 | 82 | --- | --- |
| Particles >38µm | | ASTM D7647 | >40 | 4 | --- | --- |
| Particles >71µm | | ASTM D7647 | >10 | 0 | --- | --- |
| Oil Cleanliness | | ISO 4406 (c) | >23/21/16 | 21/19/16 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.075 | NEG | --- | --- |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|------|-----|-----|
| Sodium | ppm | ASTM D5185m | >21 | <1 | --- | --- |
| Boron | ppm | ASTM D5185m | | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 0 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 3 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 827 | 624 | --- | --- |
| Zinc | ppm | ASTM D5185m | 0 | 33 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 13 | 240 | --- | --- |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 0.06 | 0.05 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 47 | 47.1 | --- | --- |

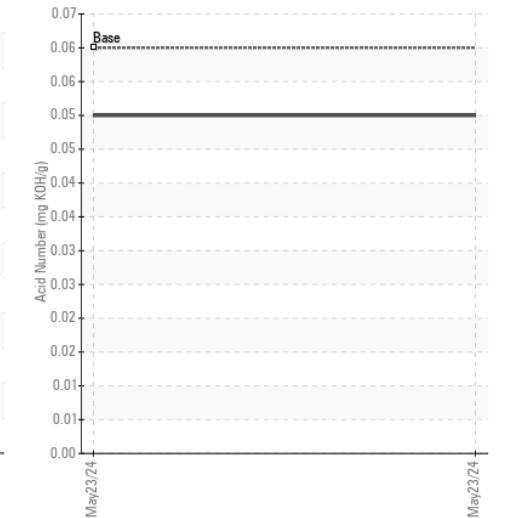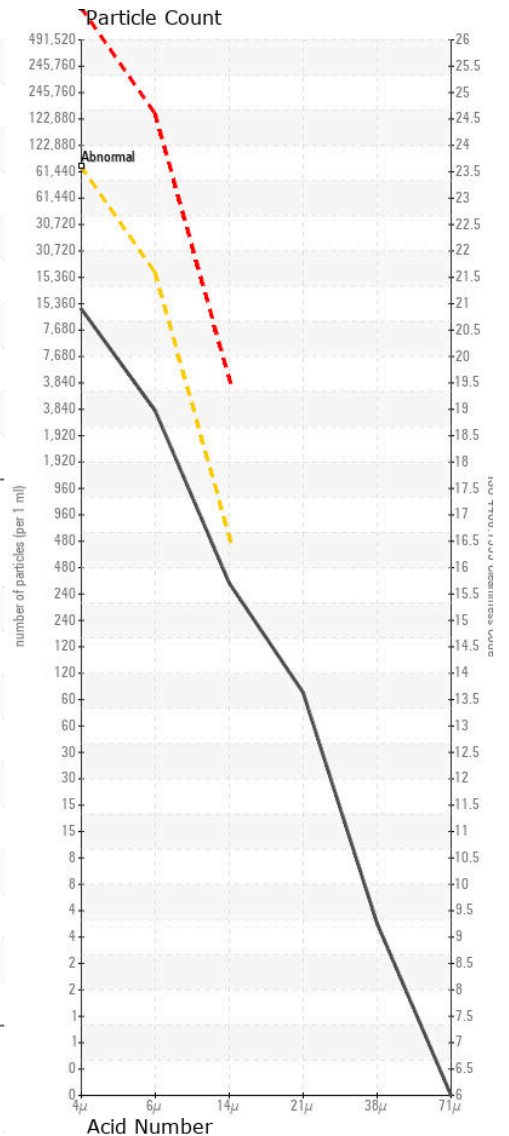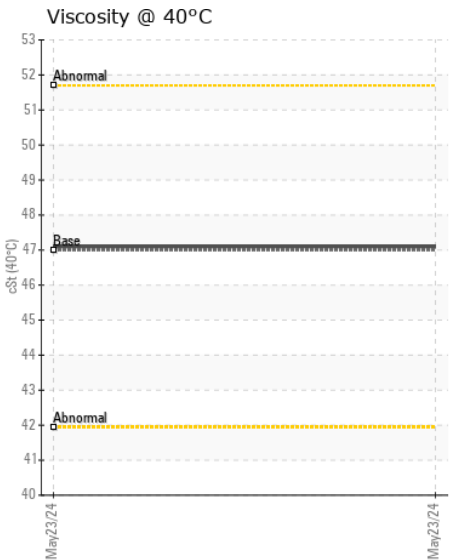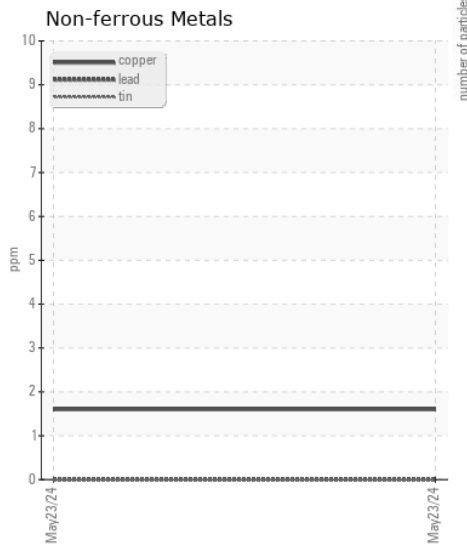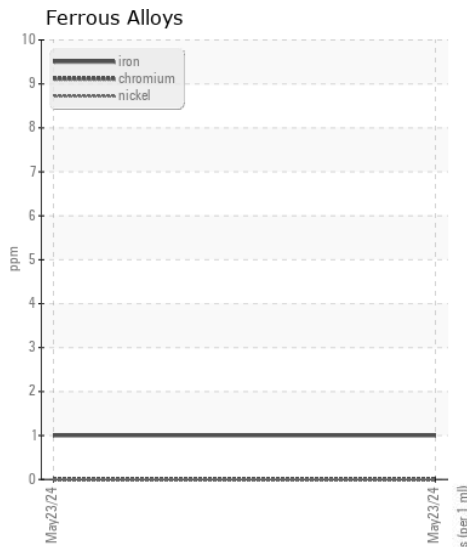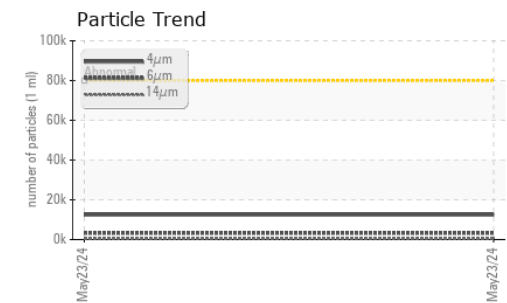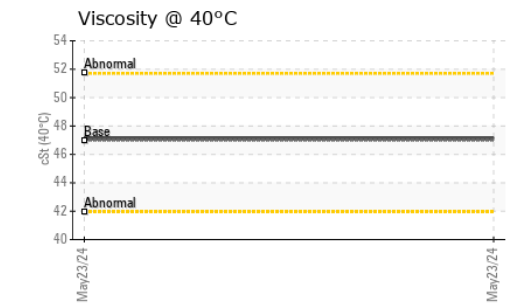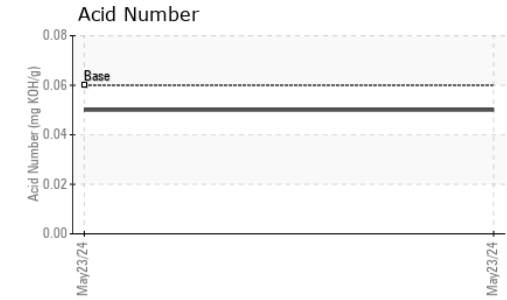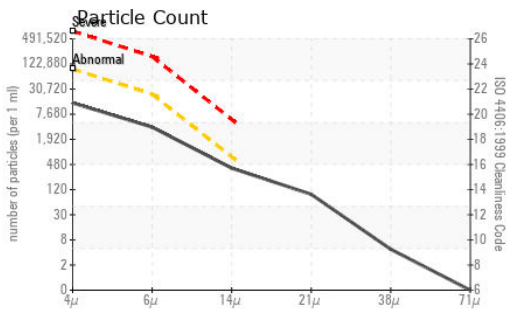

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048288 **Received** : 29 May 2024
Lab Number : 06193858 **Tested** : 30 May 2024
Unique Number : 11055981 **Diagnosed** : 31 May 2024 - Angela Borella
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

T:
 F: (740)373-5570