



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 325G 1T0325GLJKJ364209
Component
Hydraulic System
Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0209899	---	---
Sample Date		Client Info		28 May 2024	---	---
Machine Age	hrs	Client Info		1048	---	---
Oil Age	hrs	Client Info		1048	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	16	---	---
Iron	ppm	ASTM D5185m	>32	9	---	---
Chromium	ppm	ASTM D5185m	>9	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	<1	---	---
Lead	ppm	ASTM D5185m	>28	<1	---	---
Copper	ppm	ASTM D5185m	>50	8	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>11	2	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	18764	---	---
Particles >6µm		ASTM D7647	>20000	2033	---	---
Particles >14µm		ASTM D7647	>640	121	---	---
Particles >21µm		ASTM D7647	>160	34	---	---
Particles >38µm		ASTM D7647	>40	3	---	---
Particles >71µm		ASTM D7647	>10	1	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	21/18/14	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>21	<1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		7	---	---
Calcium	ppm	ASTM D5185m	87	371	---	---
Phosphorus	ppm	ASTM D5185m	727	750	---	---
Zinc	ppm	ASTM D5185m	900	949	---	---
Sulfur	ppm	ASTM D5185m	1500	2232	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.77	---	---
Visc @ 40°C	cSt	ASTM D445	65	58.4	---	---

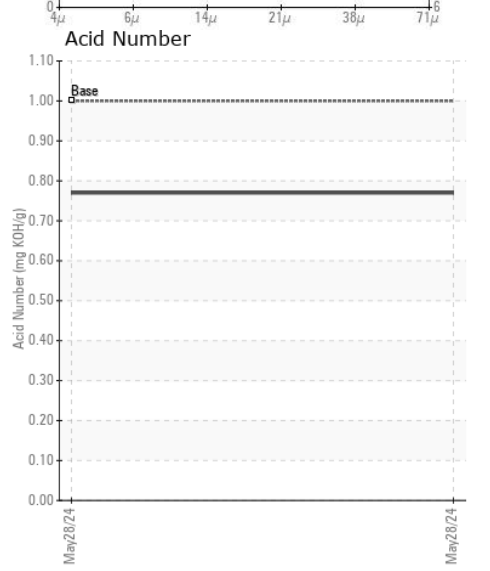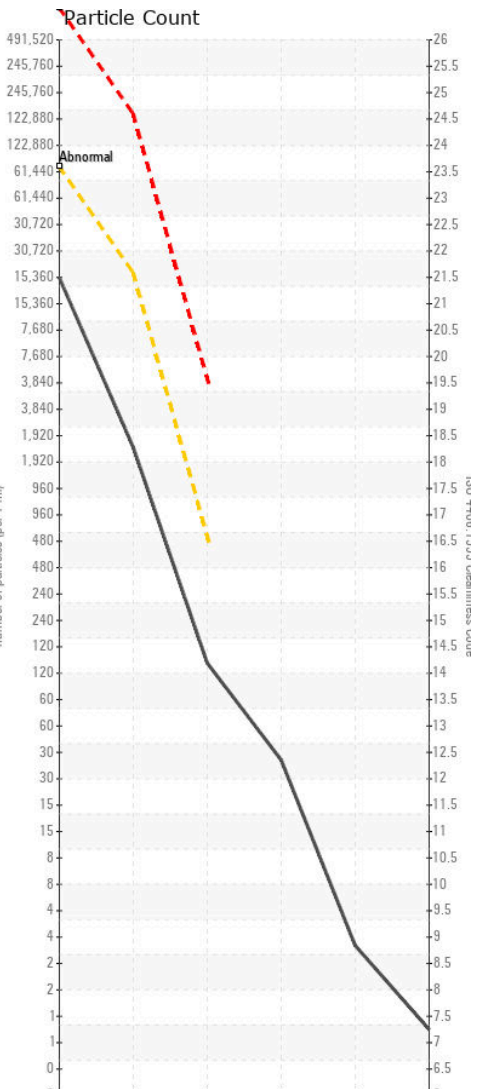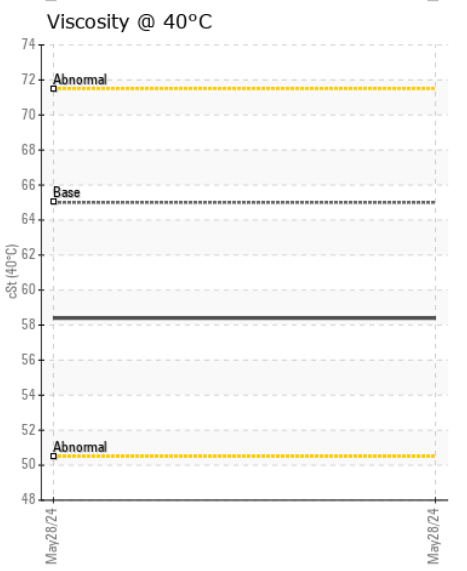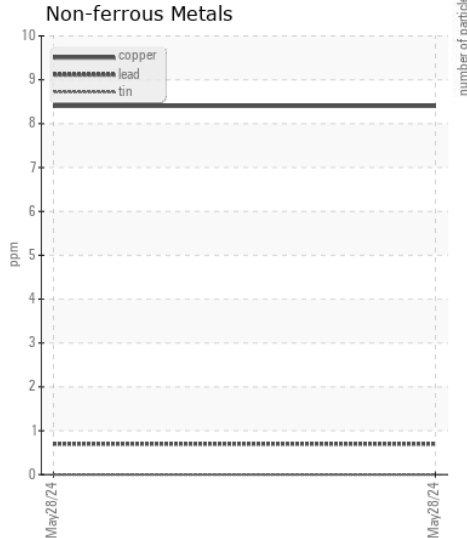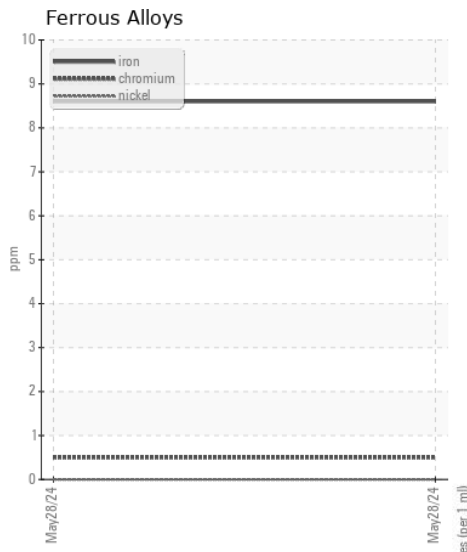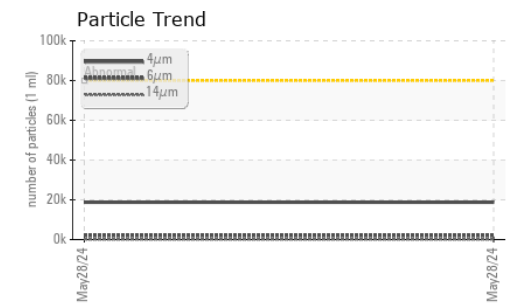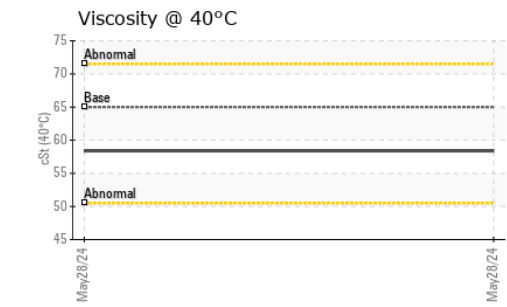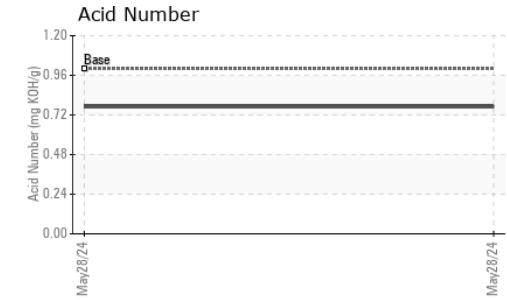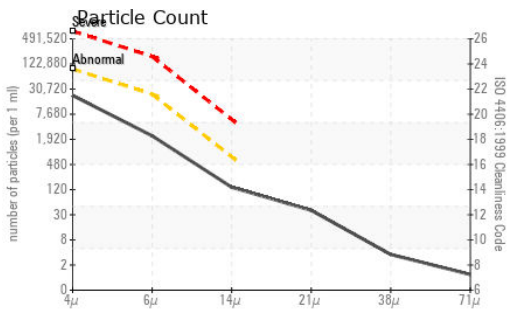

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0209899 **Received** : 29 May 2024
Lab Number : 06193874 **Tested** : 30 May 2024
Unique Number : 11055997 **Diagnosed** : 31 May 2024 - Angela Borella
Test Package : MOBCE (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - WILKESBORO
 288 WESTGATE DRIVE
 WILKESBORO, NC
 US 28697
 Contact: BUTCH JANES
 bjanes@jamesriverequipment.com
 T: (336)973-8201
 F: (336)973-8496