



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**John Deere 650J 650J-2 (S/N T0650JX147801)**  
 Component  
**Hydraulic System**  
 Fluid  
**MOBIL MOBILTRANS AST 30 (--- GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>TLY0002330</b>	---	---
Sample Date		Client Info		<b>21 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>9024</b>	---	---
Oil Age	hrs	Client Info		<b>8494</b>	---	---
Filter Age	hrs	Client Info		<b>8494</b>	---	---
Oil Changed		Client Info		<b>Not Changed</b>	---	---
Filter Changed		Client Info		<b>Not Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>23	<b>27</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>5</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>9	<b>11</b>	---	---
Lead	ppm	ASTM D5185m	>28	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>51	<b>14</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION










The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>31	<b>27</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>80000	<b>64555</b>	---	---
Particles >6µm		ASTM D7647	>20000	<b>5730</b>	---	---
Particles >14µm		ASTM D7647	>640	<b>54</b>	---	---
Particles >21µm		ASTM D7647	>160	<b>14</b>	---	---
Particles >38µm		ASTM D7647	>40	<b>1</b>	---	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>23/20/13</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>21	<b>3</b>	---	---
Boron	ppm	ASTM D5185m		<b>63</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>36</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>404</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1726</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>736</b>	---	---
Zinc	ppm	ASTM D5185m		<b>829</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3024</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.95</b>	---	---
Visc @ 40°C	cSt	ASTM D445	57.6	<b>63.4</b>	---	---

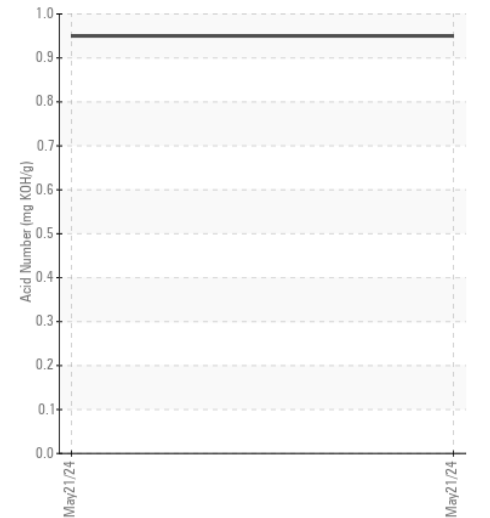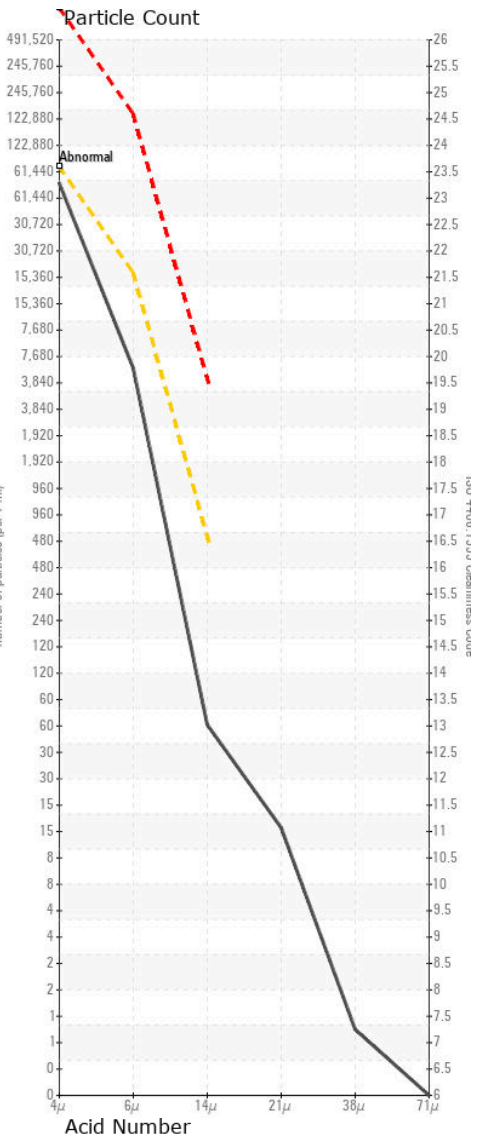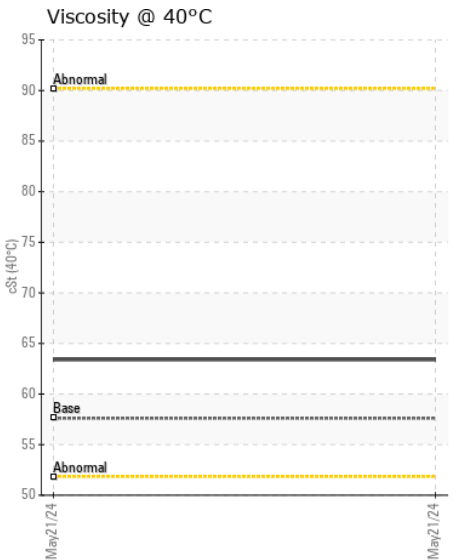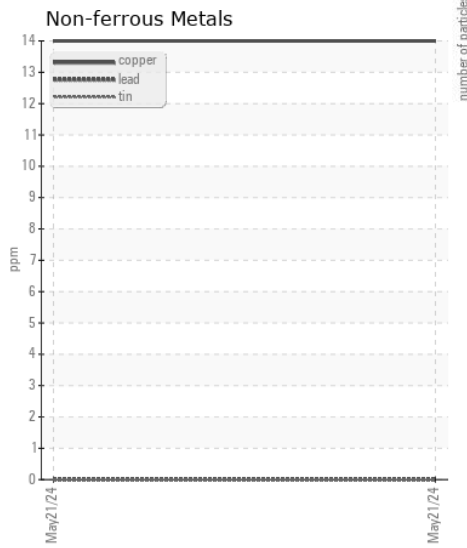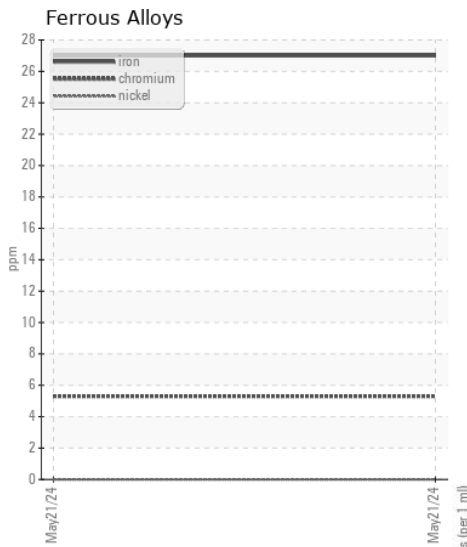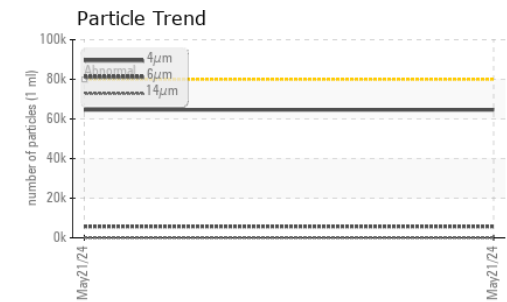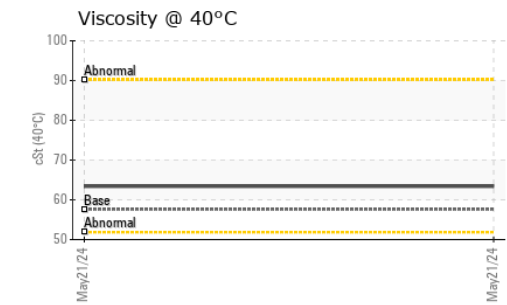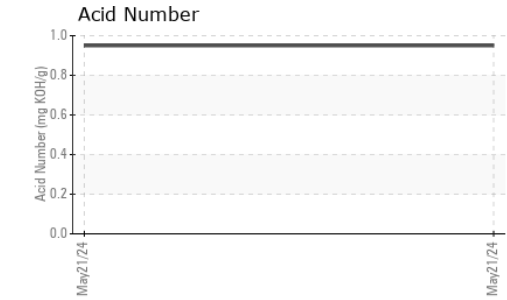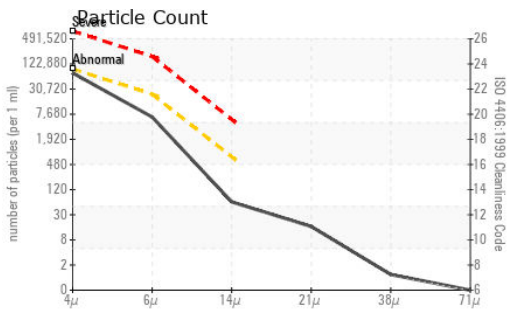

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TLY0002330

Lab Number : 06193887

Unique Number : 11056010

Test Package : CONST

Received : 29 May 2024

Tested : 30 May 2024

Diagnosed : 31 May 2024 - Angela Borella

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**GAINES & COMPANY**

112 WESTMINSTER RD

REISTERSTOWN, MD

US 21136

Contact: BRANDY BADING

bbading@gainessandco.com

T:

F: