



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**Ascendum Machinery**  
Machine Id  
**VOLVO L120H RL84 (S/N L120HV633470)**  
Component  
**Hydraulic System**  
Fluid  
**VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011435	ASC0008533	ASC0006207
Sample Date		Client Info		10 May 2024	15 Feb 2024	06 Jan 2024
Machine Age	hrs	Client Info		1498	971	717
Oil Age	hrs	Client Info		1498	971	717
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	ATTENTION	ATTENTION

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	6	3	3
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	2	2
Lead	ppm	ASTM D5185m	>20	<1	0	1
Copper	ppm	ASTM D5185m	>150	2	2	2
Tin	ppm	ASTM D5185m	>20	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

### CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	1	1	2
Potassium	ppm	ASTM D5185m	>20	0	1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647		4048	7142	5216
Particles >6µm		ASTM D7647	>2500	240	1250	485
Particles >14µm		ASTM D7647	>80	7	111	33
Particles >21µm		ASTM D7647	>20	1	32	9
Particles >38µm		ASTM D7647	>4	0	2	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>-/18/13	19/15/10	20/17/14	20/16/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	0
Boron	ppm	ASTM D5185m	14	0	0	0
Barium	ppm	ASTM D5185m	0.0	0	<1	0
Molybdenum	ppm	ASTM D5185m	0.0	<1	0	1
Manganese	ppm	ASTM D5185m	0.0	0	0	<1
Magnesium	ppm	ASTM D5185m	2.6	4	5	5
Calcium	ppm	ASTM D5185m	49	95	74	84
Phosphorus	ppm	ASTM D5185m	354	401	322	367
Zinc	ppm	ASTM D5185m	419	520	456	437
Sulfur	ppm	ASTM D5185m	3719	3024	2191	2511
Acid Number (AN)	mg KOH/g	ASTM D8045		0.34	0.50	0.35
Visc @ 40°C	cSt	ASTM D445	46	41.8	42.6	43.1

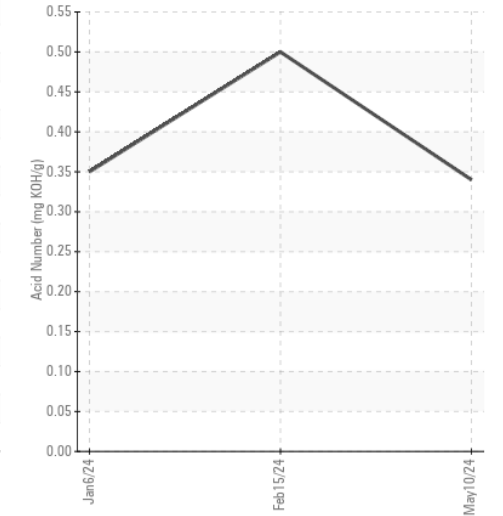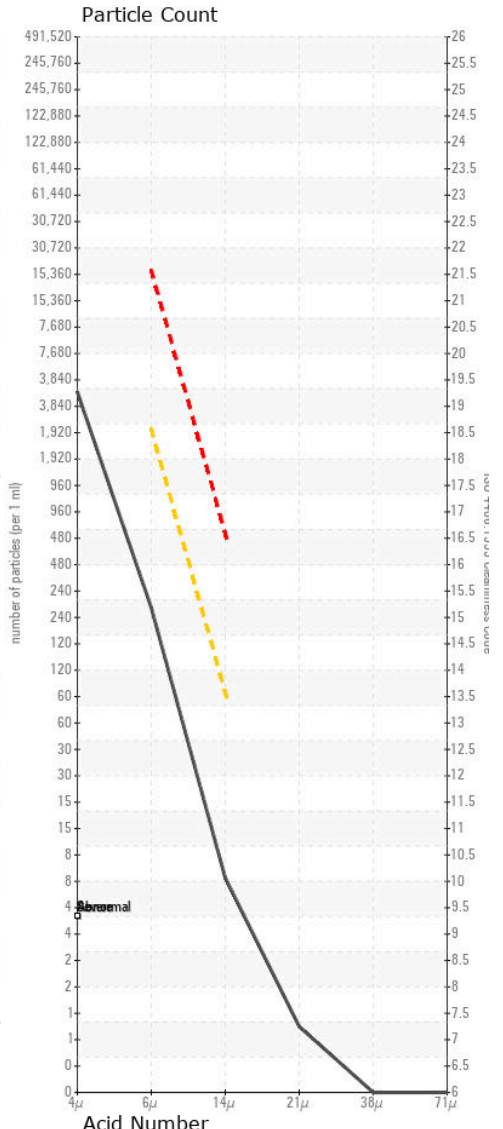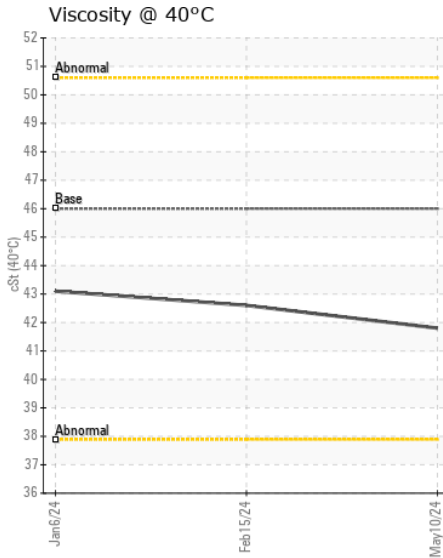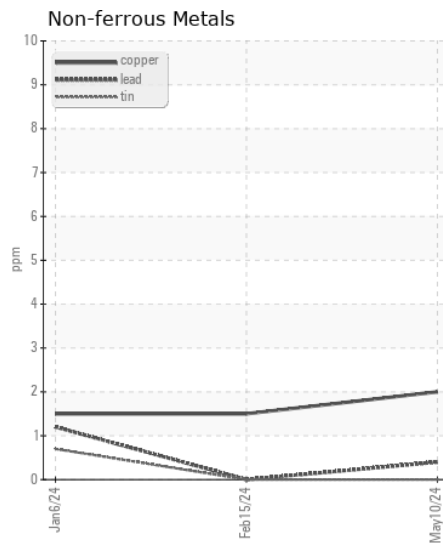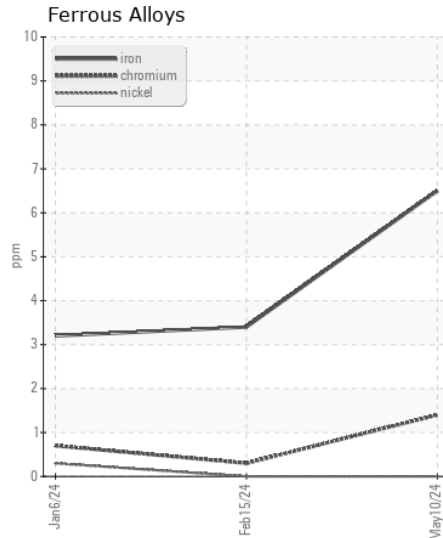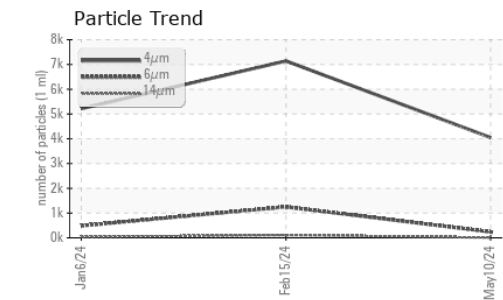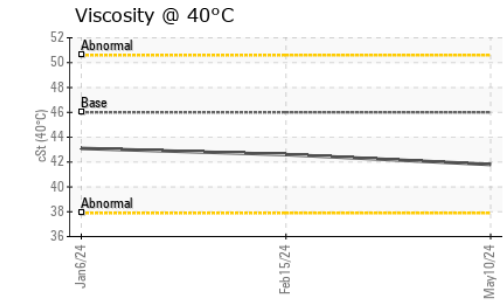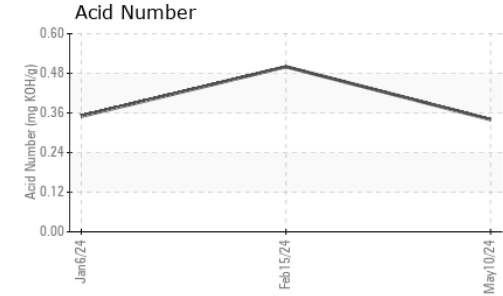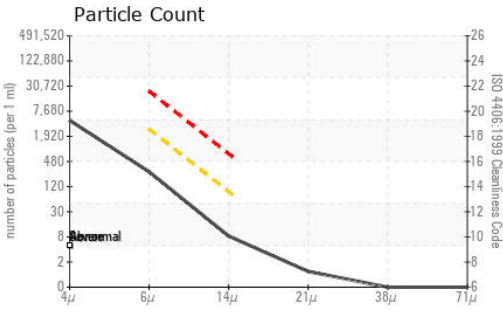

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011435 **Received** : 29 May 2024  
**Lab Number** : 06193891 **Tested** : 30 May 2024  
**Unique Number** : 11056014 **Diagnosed** : 30 May 2024 - Wes Davis  
**Test Package** : CONST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HILCO TRANSPORT**  
 7700 KENMONT RD  
 GREENSBORO, NC  
 US 27409

Contact: MIKE LAUGHEAD  
 mlaughead@hilcotransport.com

T: (336)273-9441  
 F: (336)273-9701