



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id  
**VOLVO 314688**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

### RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) AW HYDRAULIC OIL ISO 46. Please confirm.

### WEAR

All component wear rates are normal.










### CONTAMINATION

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011317	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		459	---	---
Oil Age	hrs	Client Info		459	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>20	1	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	14	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>20	3	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 11303	---	---
Particles >6µm		ASTM D7647	>1300	▲ 4395	---	---
Particles >14µm		ASTM D7647	>160	▲ 358	---	---
Particles >21µm		ASTM D7647	>40	52	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/19/16	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---
Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	<1	---	---
Calcium	ppm	ASTM D5185m	200	95	---	---
Phosphorus	ppm	ASTM D5185m	300	435	---	---
Zinc	ppm	ASTM D5185m	370	545	---	---
Sulfur	ppm	ASTM D5185m	2500	1234	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.49	---	---
Visc @ 40°C	cSt	ASTM D445	46	43.8	---	---

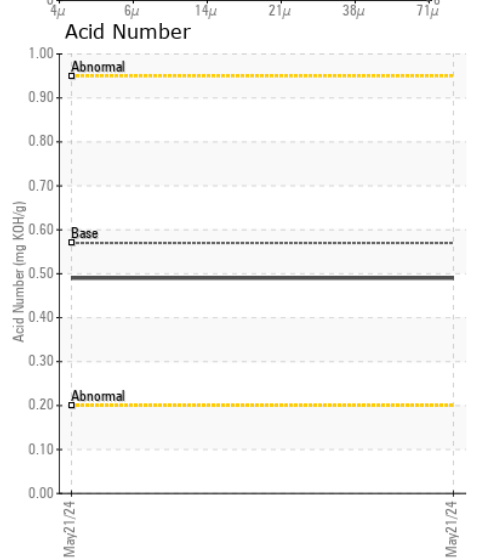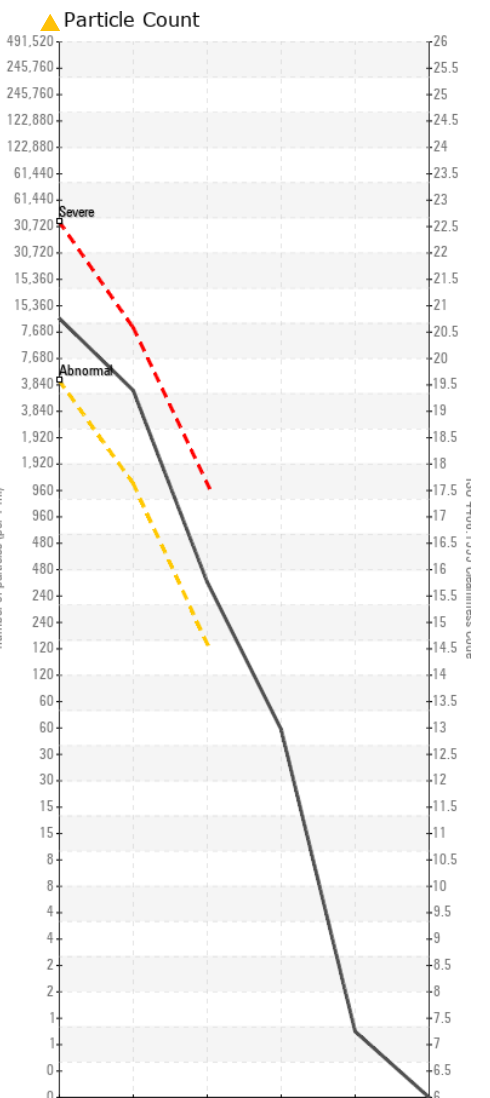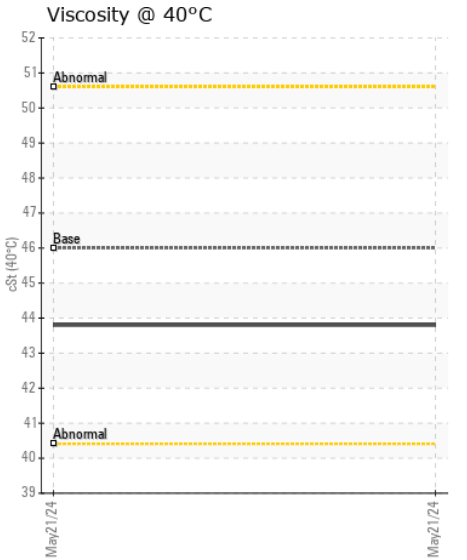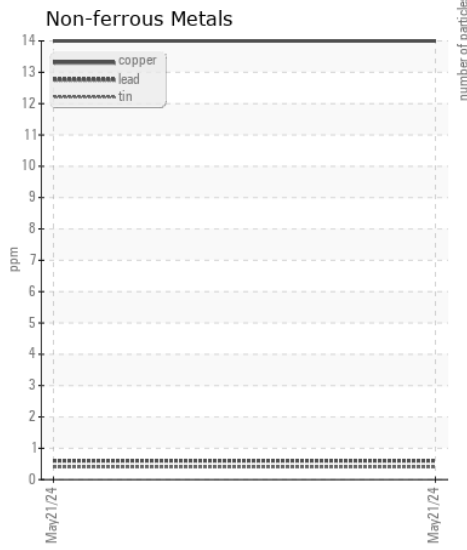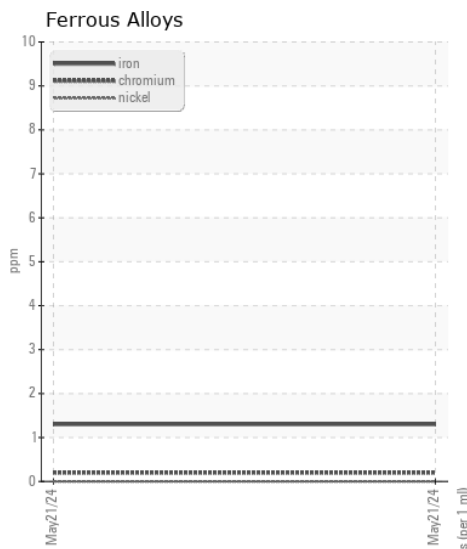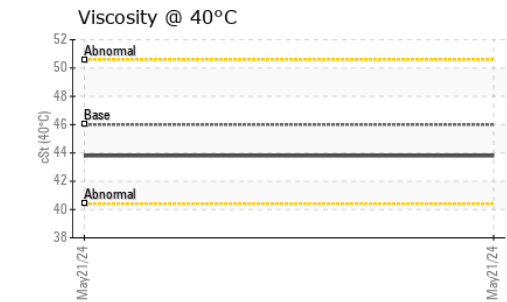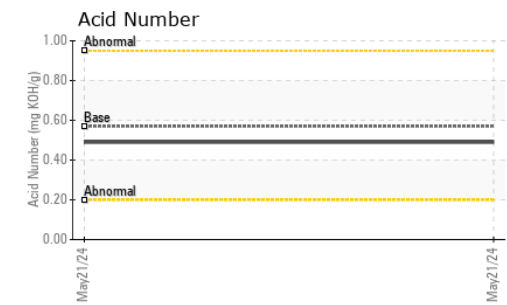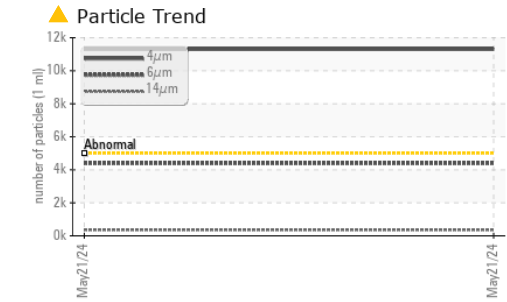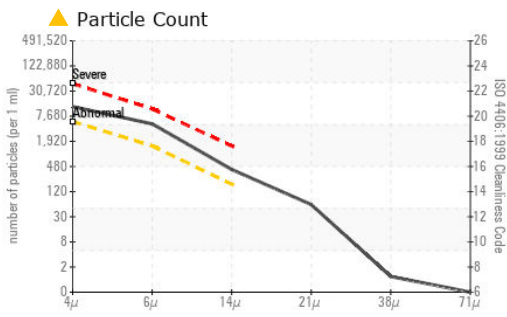

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011317  
**Lab Number** : 06193904  
**Unique Number** : 11056027  
**Test Package** : CONST

**Received** : 29 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Wes Davis

**117 - ASCENDUM MACHINERY INC - GREENVILLE**  
 2002 N GREENE ST  
 GREENVILLE, NC  
 US 27834  
 Contact: ALLEN WILLIAMS  
 allen.williams@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (704)494-8197