



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
AMERICAN 9815
Component
Hydraulic System
Fluid
Hydraulic System Oil (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PTK0005598	PTK0005033	---
Sample Date		Client Info		22 May 2024	18 Jan 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<1	<1	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>10	<1	2	---
Lead	ppm	ASTM D5185m	>10	<1	1	---
Copper	ppm	ASTM D5185m	>75	<1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	4	---
Potassium	ppm	ASTM D5185m	>20	1	1	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	712	1061	---
Particles >6µm		ASTM D7647	>1300	229	246	---
Particles >14µm		ASTM D7647	>160	28	28	---
Particles >21µm		ASTM D7647	>40	8	8	---
Particles >38µm		ASTM D7647	>10	0	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/12	17/15/12	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		<1	2	---
Molybdenum	ppm	ASTM D5185m		140	168	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		1	<1	---
Calcium	ppm	ASTM D5185m		60	68	---
Phosphorus	ppm	ASTM D5185m		452	522	---
Zinc	ppm	ASTM D5185m		427	523	---
Sulfur	ppm	ASTM D5185m		1938	2151	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.69	0.69	---
Visc @ 40°C	cSt	ASTM D445		43.8	44.3	---

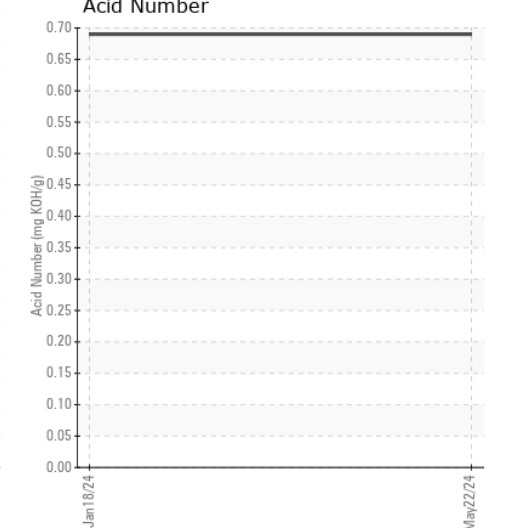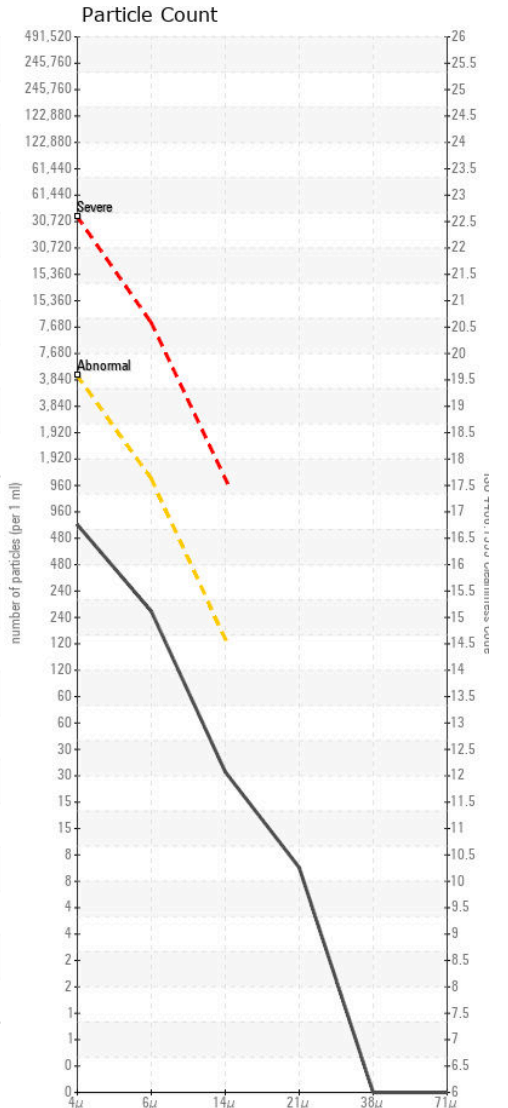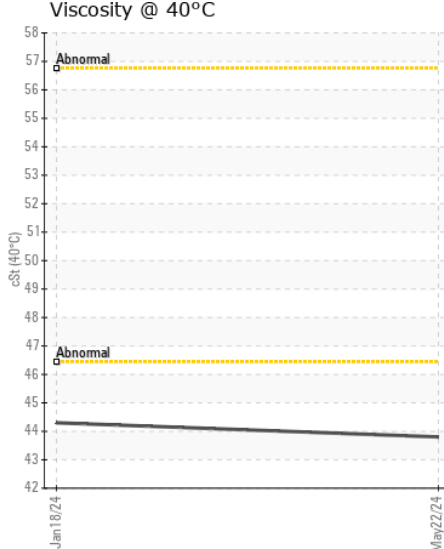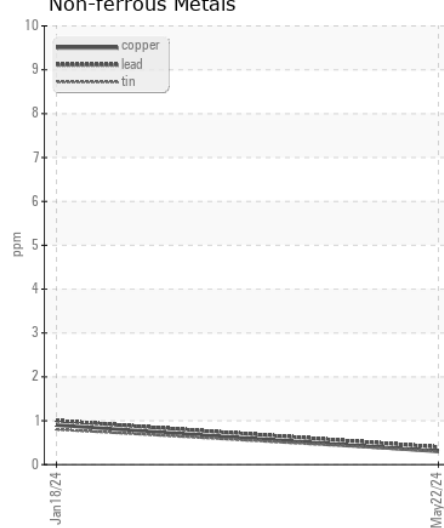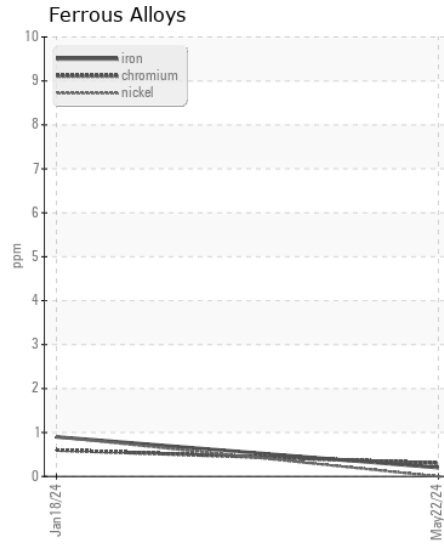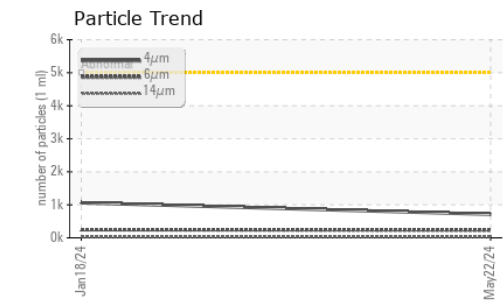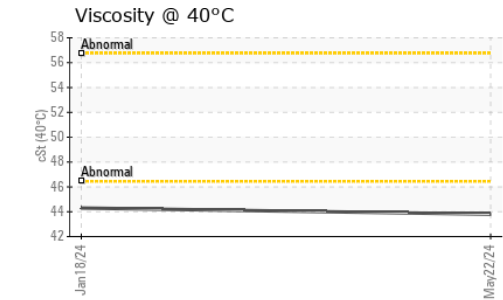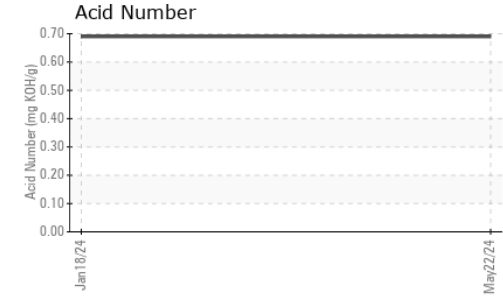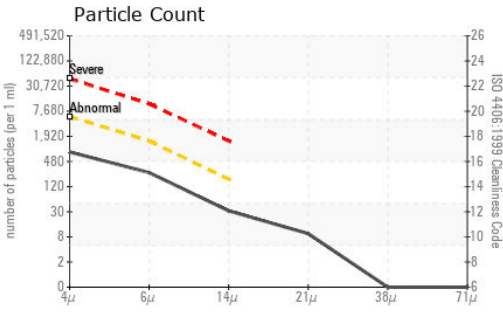

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0005598 **Received** : 29 May 2024
Lab Number : 06193941 **Tested** : 30 May 2024
Unique Number : 11056064 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : MOB 2

LIBERTY PACKAGING BP
 6900 93RD AVE N
 BROOKLYN PARK, MN
 US 55445
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)