



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area  
**3 STORK PACK [24156666]**  
 Machine Id  
**B21613 - 5 (S/N 69700020)**  
 Component  
**Gearbox**  
 Fluid  
**JAX MAGNA-PLATE 85W140-FG (6 GAL)**

## RECOMMENDATION

We suspect abnormal contamination may be due to sampling method. No corrective action is recommended at this time. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## WEAR

All component wear rates are normal.







## CONTAMINATION

Moderate concentration of visible dirt/debris present in the oil.

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0921322</b>	WC0885470	WC0866689
Sample Date		Client Info		<b>21 May 2024</b>	07 Feb 2024	05 Nov 2023
Machine Age	yrs	Client Info		<b>0</b>	0	0
Oil Age	yrs	Client Info		<b>1</b>	0	0
Filter Age	yrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>Not Changed</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185m	>200	<b>3</b>	2	2
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m	>100	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>200	<b>35</b>	31	29
Tin	ppm	ASTM D5185m	>25	<b>2</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>50	<b>1</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>20000	<b>---</b>	▲ 68298	▲ 84527
Particles >6µm		ASTM D7647	>5000	<b>---</b>	4987	● 6064
Particles >14µm		ASTM D7647	>640	<b>---</b>	73	99
Particles >21µm		ASTM D7647	>160	<b>---</b>	14	21
Particles >38µm		ASTM D7647	>40	<b>---</b>	1	1
Particles >71µm		ASTM D7647	>10	<b>---</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>---</b>	▲ 23/19/13	▲ 24/20/14
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	▲ <b>MODER</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m		<b>1</b>	0	0
Calcium	ppm	ASTM D5185m		<b>3</b>	1	0
Phosphorus	ppm	ASTM D5185m		<b>423</b>	416	387
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>6067</b>	5217	4764
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.78</b>	0.79	0.69
Visc @ 40°C	cSt	ASTM D445		<b>719</b>	726	730

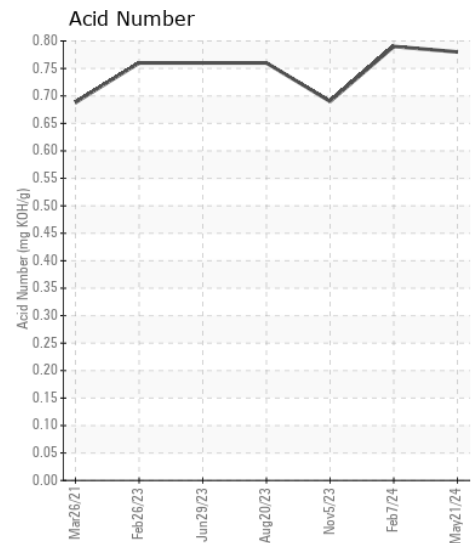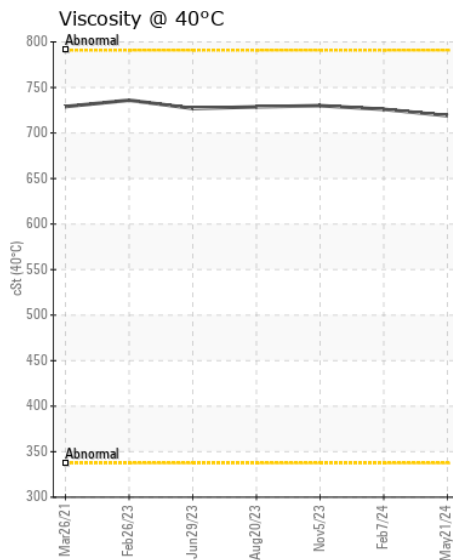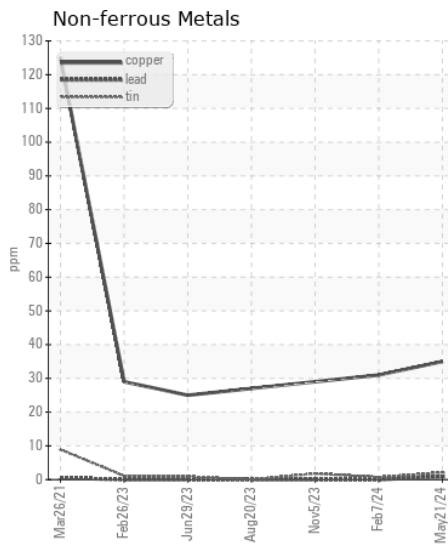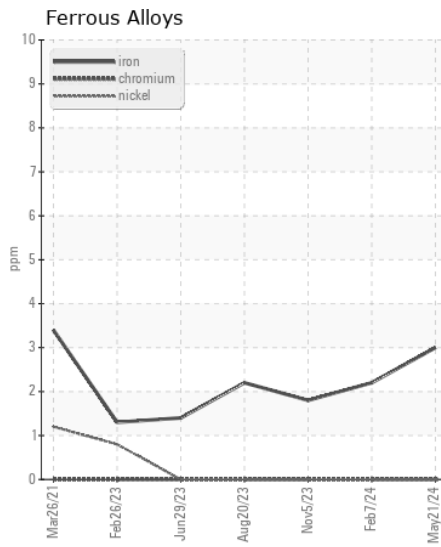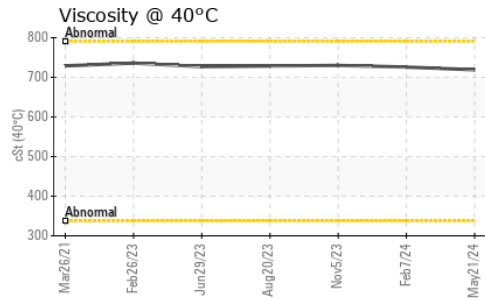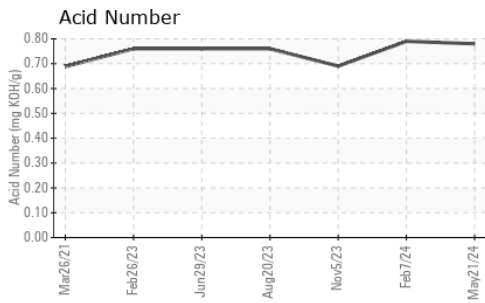

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0921322 **Received** : 29 May 2024  
**Lab Number** : 06193956 **Tested** : 31 May 2024  
**Unique Number** : 11056079 **Diagnosed** : 31 May 2024 - Angela Borella  
**Test Package** : IND 2 ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HORMEL FOODS-BELOIT**  
 3000 KENNEDY DRIVE  
 BELOIT, WI  
 US 53511  
 Contact: Craig Bennett  
 cabennett@hormel.com

T:  
 F: (608)365-8322