



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**PALASYN 45**  
Machine Id  
**SULLIVAN PALATEK 21EE002128 - AMPLIFY ENERGY**  
Component  
**Compressor**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>UCS06194171</b>	UCS06152107	UCS06078386
Sample Date		Client Info		<b>14 May 2024</b>	05 Feb 2024	07 Nov 2023
Machine Age	hrs	Client Info		<b>12472</b>	11232	10223
Oil Age	hrs	Client Info		<b>3000</b>	2000	1100
Filter Age	hrs	Client Info		<b>2000</b>	1109	1100
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	0	<1
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>3</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	4
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	3
Boron	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	0	2
Calcium	ppm	ASTM D5185m	0.0	<b>0</b>	<1	<1
Phosphorus	ppm	ASTM D5185m	966	<b>394</b>	550	114
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m	1309	<b>592</b>	1373	333
Acid Number (AN)	mg KOH/g	ASTM D8045	0.172	<b>0.38</b>	0.17	0.53
Visc @ 40°C	cSt	ASTM D445	39.9	<b>47.6</b>	45.9	62.22

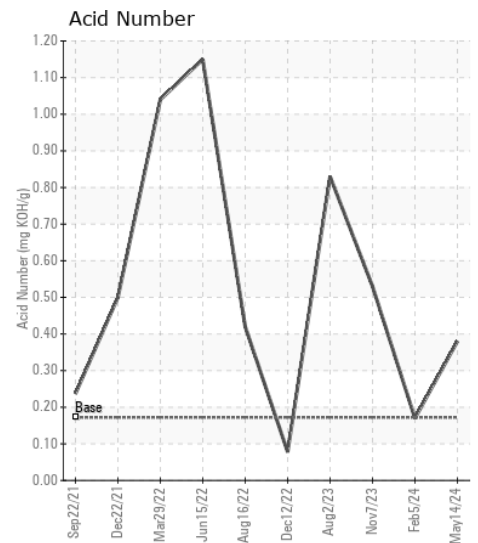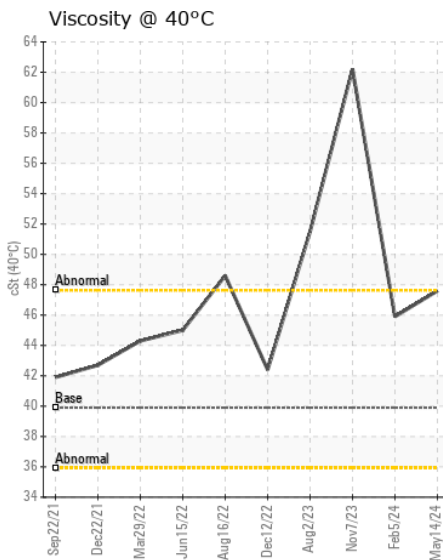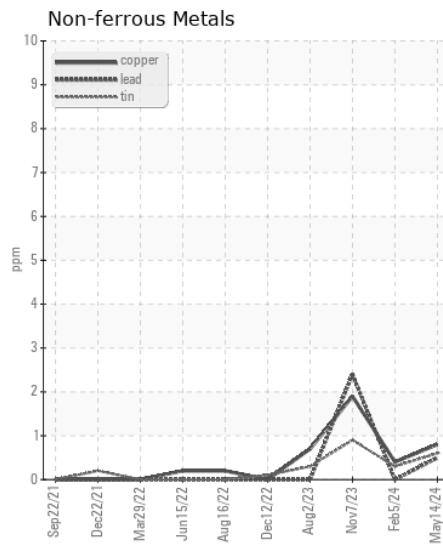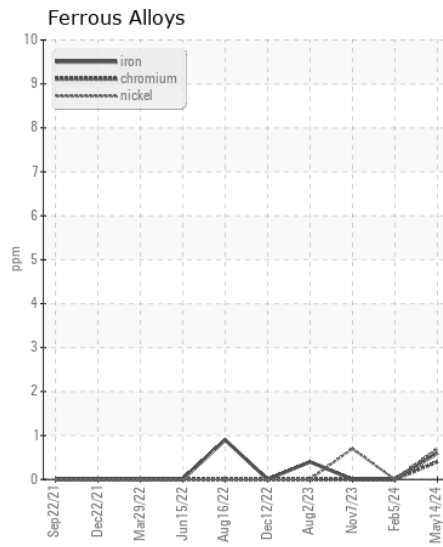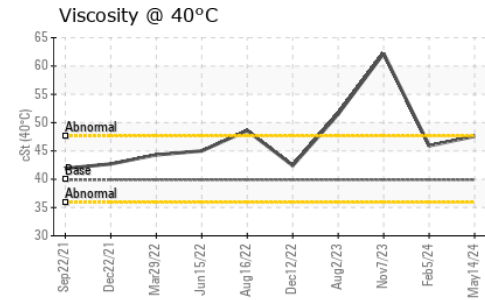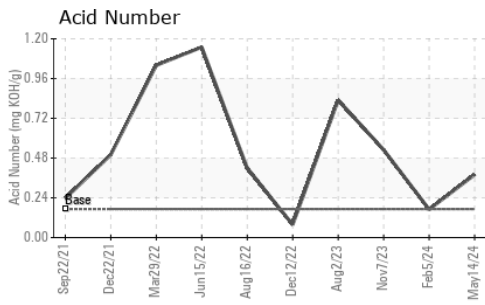

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06194171  
**Lab Number** : 06194171  
**Unique Number** : 11056294  
**Test Package** : IND 2

**Received** : 29 May 2024  
**Tested** : 30 May 2024  
**Diagnosed** : 30 May 2024 - Wes Davis

**COMPRESSION LEASING SERVICES, INC**  
 1935 N LOOP AVENUE & 1925 N LOOP AV  
 CASPER, WY  
 US 82601

Contact: ANGIE MANZANAREZ  
 amanz@cls-inc.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (307)265-3242

F: (307)265-3221