



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W8934]
 Machine Id
JOHN DEERE 850K 1T0850KXJJF343226
 Component
Transmission
 Fluid
JOHN DEERE HYDRAU (120 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W8934)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0197071	JR0194268	JR0132467
Sample Date		Client Info		28 May 2024	12 Dec 2023	13 Jun 2022
Machine Age	hrs	Client Info		5559	4896	3941
Oil Age	hrs	Client Info		4604	0	3941
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	N/A	Changed
Filter Changed		Client Info		Not Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>100	18	16	23
Iron	ppm	ASTM D5185m	>61	11	6	10
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		1	0	<1
Aluminum	ppm	ASTM D5185m	>20	1	0	<1
Lead	ppm	ASTM D5185m	>9	2	0	1
Copper	ppm	ASTM D5185m	>100	6	4	8
Tin	ppm	ASTM D5185m	>3	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>21	2	<1	<1
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>30	0	0	<1
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		11	8	12
Calcium	ppm	ASTM D5185m	87	329	249	705
Phosphorus	ppm	ASTM D5185m	727	568	589	675
Zinc	ppm	ASTM D5185m	900	684	729	885
Sulfur	ppm	ASTM D5185m	1500	1654	1513	2026
Visc @ 40°C	cSt	ASTM D445	65	56.0	56.3	52.8

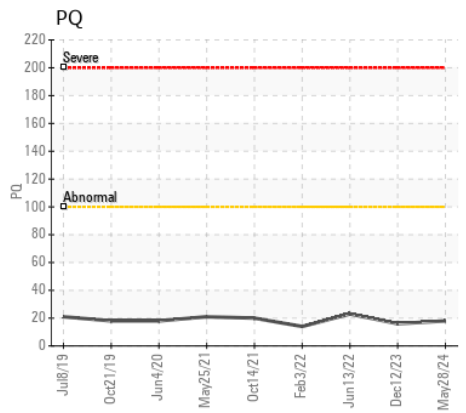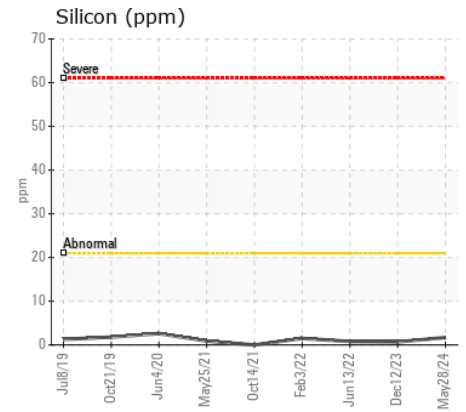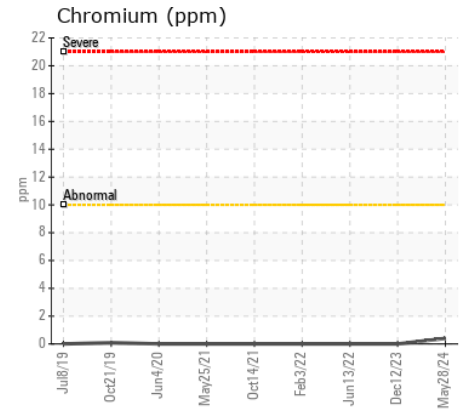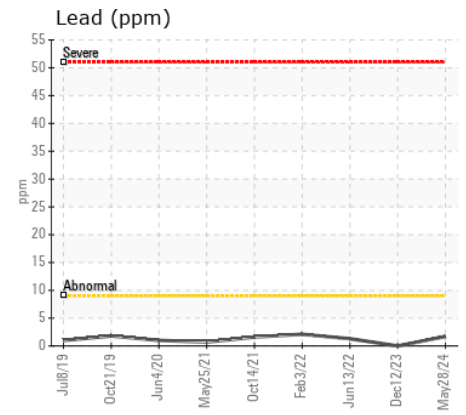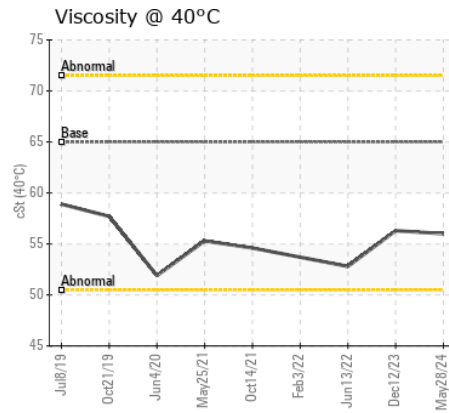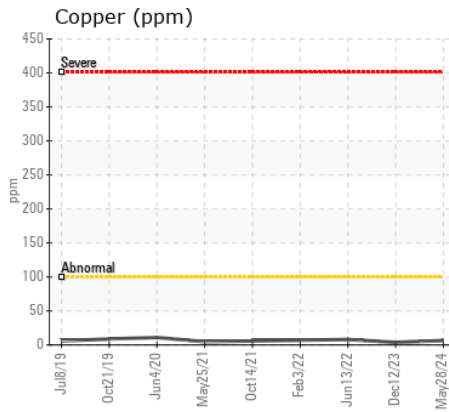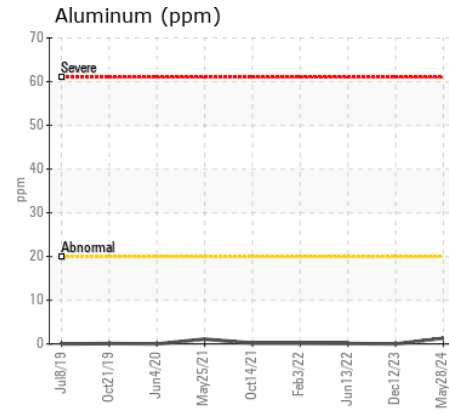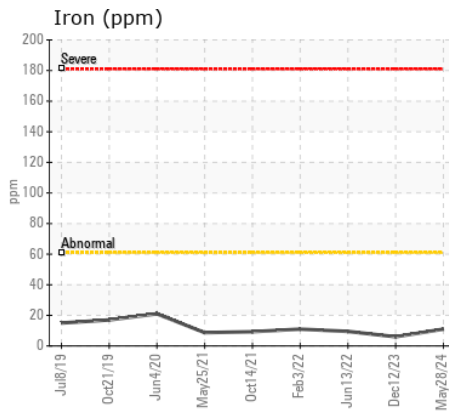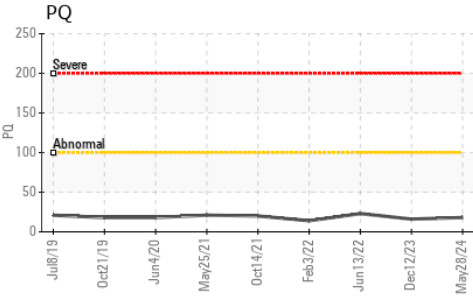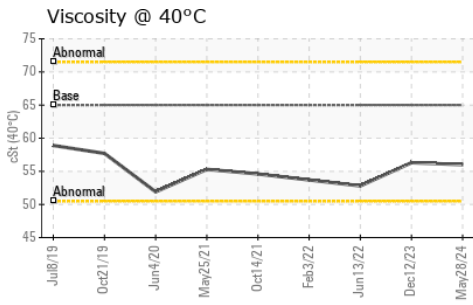

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0197071 **Received** : 29 May 2024
Lab Number : 06194242 **Tested** : 30 May 2024
Unique Number : 11056365 **Diagnosed** : 31 May 2024 - Don Baldrige
Test Package : MOBCE (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409

Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM

T: (336)668-2762
 F: (336)665-9556