



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A30G A30G753405
Component
Front Differential
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0215671	JR0198273	JR0178088
Sample Date		Client Info		22 May 2024	26 Jan 2024	28 Aug 2023
Machine Age	hrs	Client Info		1192	1186	571
Oil Age	hrs	Client Info		1192	1186	571
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		176	218	193
Iron	ppm	ASTM D5185m	>900	188	253	228
Chromium	ppm	ASTM D5185m	>20	3	5	5
Nickel	ppm	ASTM D5185m	>10	<1	2	2
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	0	2	2
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	19	19	16
Tin	ppm	ASTM D5185m	>20	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	5	5
Potassium	ppm	ASTM D5185m	>20	5	7	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	0	1
Boron	ppm	ASTM D5185m		256	270	290
Barium	ppm	ASTM D5185m		5	7	0
Molybdenum	ppm	ASTM D5185m		7	8	7
Manganese	ppm	ASTM D5185m		9	9	8
Magnesium	ppm	ASTM D5185m		6	4	5
Calcium	ppm	ASTM D5185m		897	947	1172
Phosphorus	ppm	ASTM D5185m		1347	1431	1360
Zinc	ppm	ASTM D5185m		382	416	476
Sulfur	ppm	ASTM D5185m		20931	20858	22323
Visc @ 40°C	cSt	ASTM D445		85.0	84.9	83.1

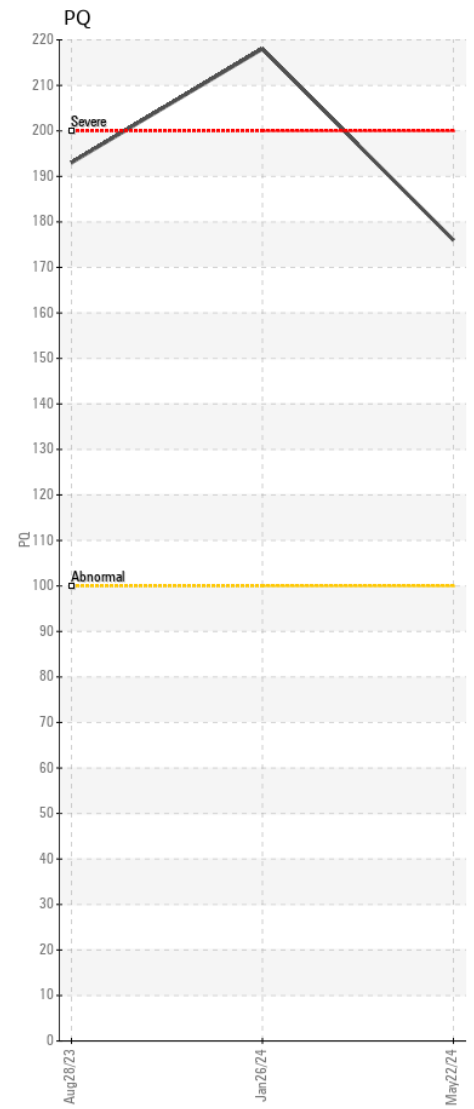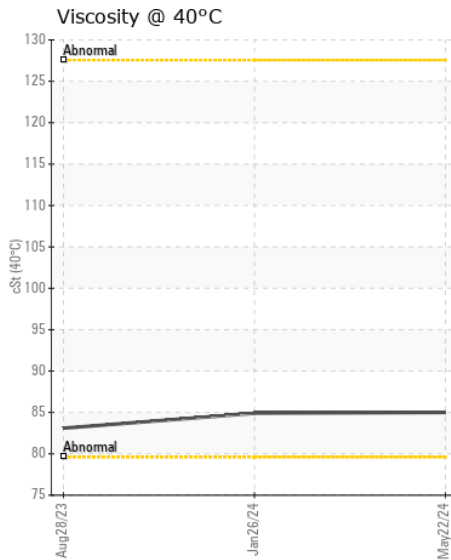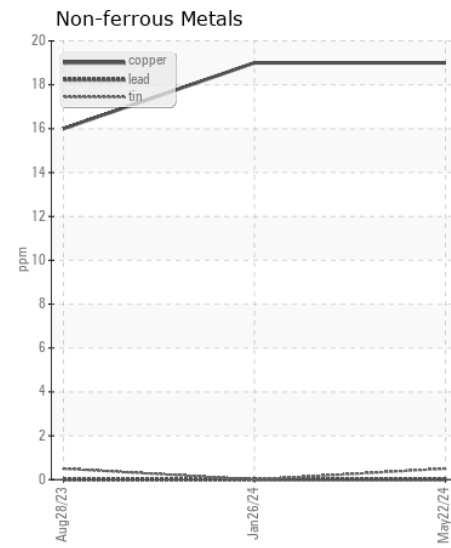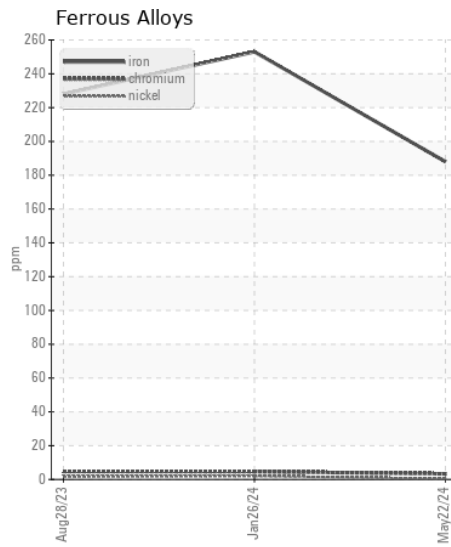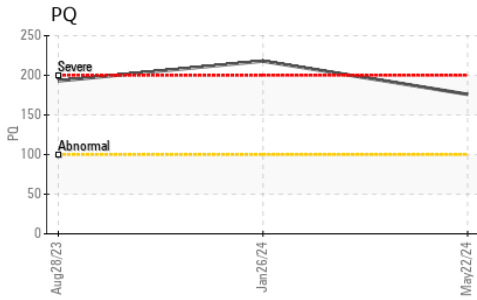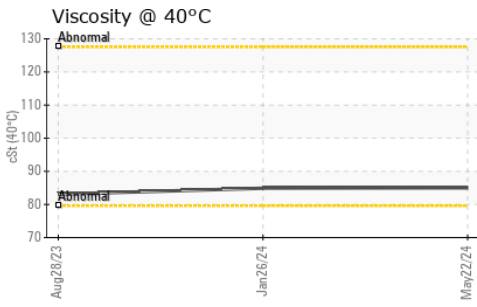

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0215671 **Received** : 29 May 2024
Lab Number : 06194265 **Tested** : 30 May 2024
Unique Number : 11056388 **Diagnosed** : 30 May 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198