



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
VOLVO A45G 353449
Component
1 Axle
Fluid
GEAR OIL SAE 75W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011495	ASC0006489	---
Sample Date		Client Info		15 May 2024	04 Jan 2024	---
Machine Age	hrs	Client Info		2042	1406	---
Oil Age	hrs	Client Info		2042	1406	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ATTENTION	NORMAL	---
Iron	ppm	ASTM D5185m	>900	32	304	---
Chromium	ppm	ASTM D5185m	>20	0	6	---
Nickel	ppm	ASTM D5185m	>10	0	3	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	0	<1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	0	12	---
Tin	ppm	ASTM D5185m	>20	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>50	<1	6	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m		<1	2	---
Boron	ppm	ASTM D5185m	400	339	133	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	0	2	---
Manganese	ppm	ASTM D5185m		<1	9	---
Magnesium	ppm	ASTM D5185m	12	0	3	---
Calcium	ppm	ASTM D5185m	150	54	225	---
Phosphorus	ppm	ASTM D5185m	1650	2532	1946	---
Zinc	ppm	ASTM D5185m	125	11	126	---
Sulfur	ppm	ASTM D5185m	22500	32631	23336	---
Visc @ 40°C	cSt	ASTM D445	109	53.18	105	---

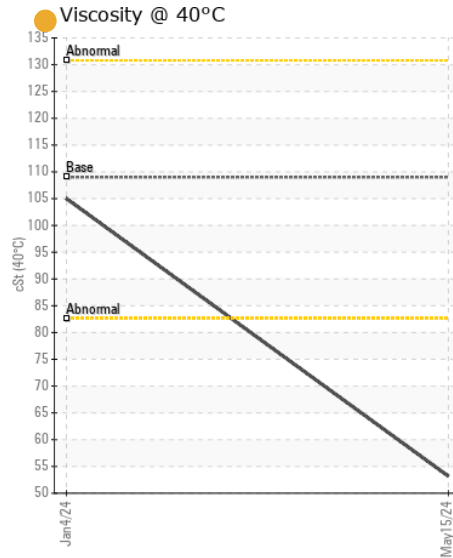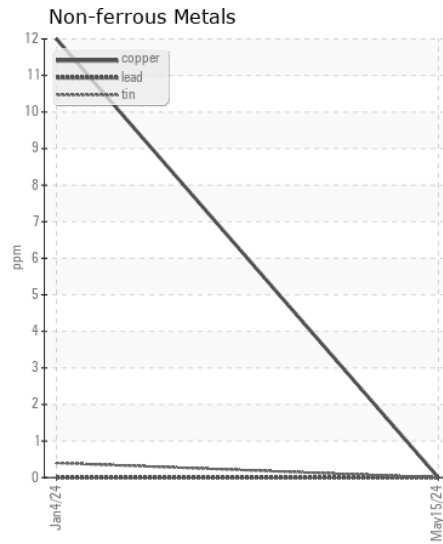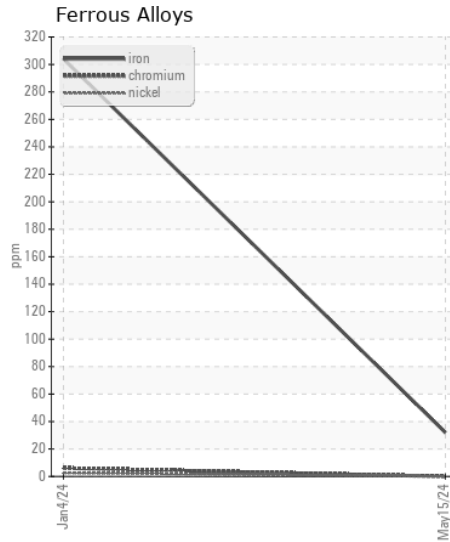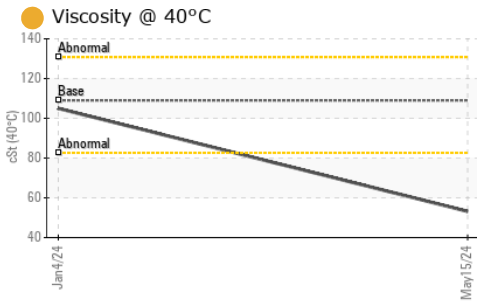

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011495
Lab Number : 06194328
Unique Number : 11056451
Test Package : CONST

Received : 29 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Jonathan Hester

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834
 Contact: HUNTER DOLIVE
 hunter.dolive@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (704)494-8197