



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO EC480EL 314818
Component
Rear Right Final Drive
Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010066	ASC0008841	VCP435279
Sample Date		Client Info		24 May 2024	05 Mar 2024	14 Sep 2023
Machine Age	hrs	Client Info		2588	2217	1705
Oil Age	hrs	Client Info		371	512	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>3360	81	98	106
Chromium	ppm	ASTM D5185m	>35	<1	1	1
Nickel	ppm	ASTM D5185m	>8	0	0	0
Titanium	ppm	ASTM D5185m	>15	0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>185	0	2	0
Lead	ppm	ASTM D5185m	>5	0	0	0
Copper	ppm	ASTM D5185m	>80	0	<1	<1
Tin	ppm	ASTM D5185m	>8	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>1100	2	4	4
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m	379	231	185	196
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.8	0	<1	<1
Manganese	ppm	ASTM D5185m	0.0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	31	0	<1	<1
Calcium	ppm	ASTM D5185m	38	<1	11	26
Phosphorus	ppm	ASTM D5185m	1077	1123	1007	962
Zinc	ppm	ASTM D5185m	46	0	5	14
Sulfur	ppm	ASTM D5185m	23526	33121	27051	28176
Visc @ 40°C	cSt	ASTM D445	139	143	152	174

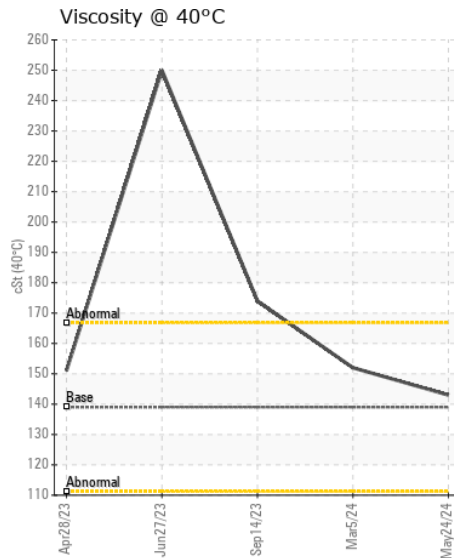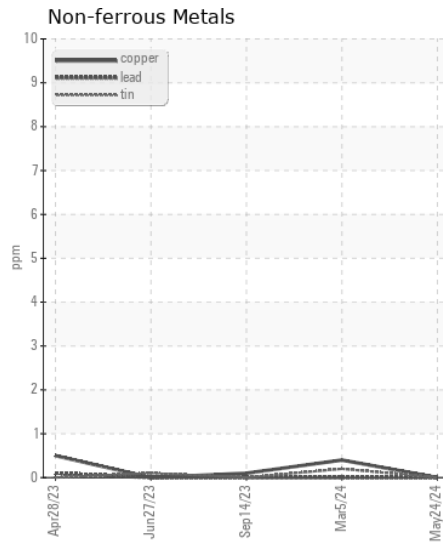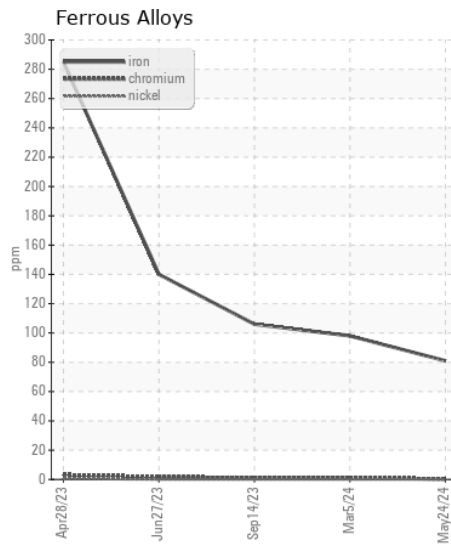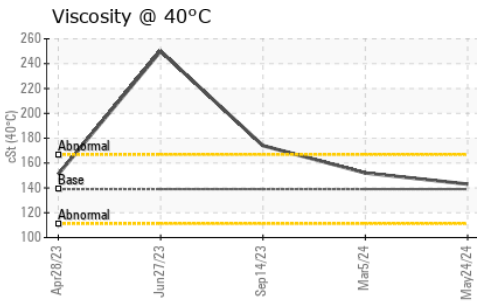

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0010066
Lab Number : 06194330
Unique Number : 11056453
Test Package : CONST
Received : 29 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Angela Borella

HANSON AGGREGATES
 10501 CAPITAL BLVD
 WAKE FOREST, NC
 US 27587
 Contact: RICKEY DAVIS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: