



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G FS 352473
Component
Drop Box
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION





The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011327	ASC0006185	VCP390321
Sample Date		Client Info		21 May 2024	19 Jan 2024	18 Oct 2022
Machine Age	hrs	Client Info		6509	6051	4020
Oil Age	hrs	Client Info		4478	2031	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

Iron	ppm	ASTM D5185m	>500	349	▲ 526	301
Chromium	ppm	ASTM D5185m	>20	2	6	2
Nickel	ppm	ASTM D5185m	>10	<1	3	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	0	1	<1
Lead	ppm	ASTM D5185m	>30	0	0	<1
Copper	ppm	ASTM D5185m	>30	9	8	13
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>50	16	15	46
Potassium	ppm	ASTM D5185m	>20	0	<1	5
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		4	5	7
Boron	ppm	ASTM D5185m		169	157	135
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		8	13	10
Manganese	ppm	ASTM D5185m		7	8	7
Magnesium	ppm	ASTM D5185m		0	0	7
Calcium	ppm	ASTM D5185m		42	26	32
Phosphorus	ppm	ASTM D5185m		2300	2248	2207
Zinc	ppm	ASTM D5185m		57	49	127
Sulfur	ppm	ASTM D5185m		31766	26174	32406
Visc @ 40°C	cSt	ASTM D445		49.2	51.2	47.8

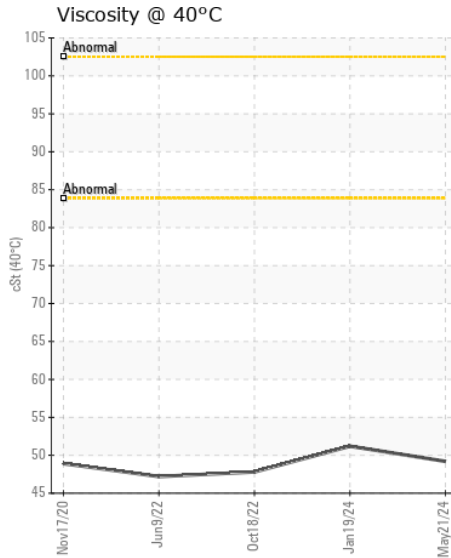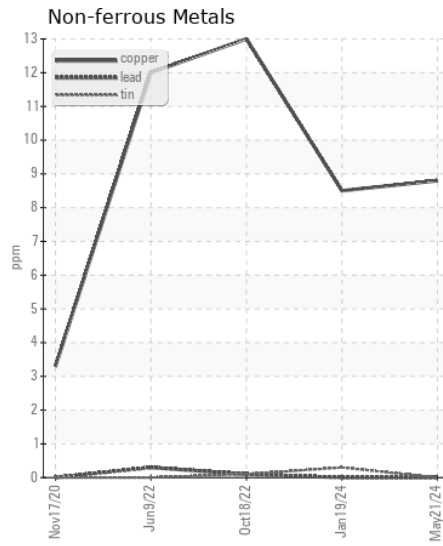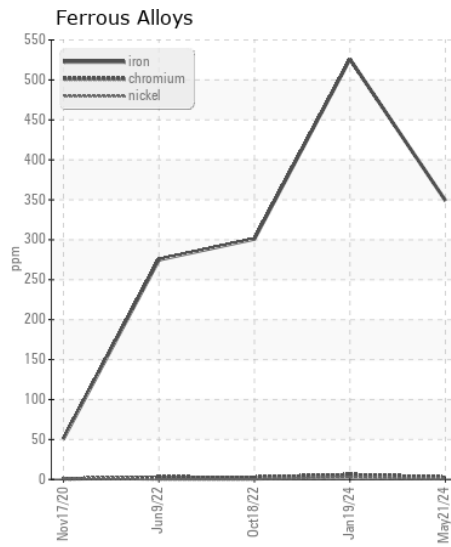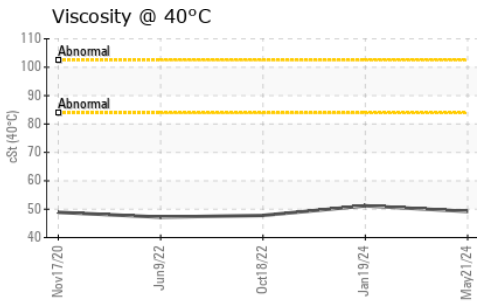

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011327
Lab Number : 06194345
Unique Number : 11056468
Test Package : CONST

Received : 29 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Wes Davis

117 - ASCENDUM MACHINERY INC - GREENVILLE
 2002 N GREENE ST
 GREENVILLE, NC
 US 27834

Contact: ALLEN WILLIAMS
 allen.williams@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (704)494-8197