



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A30G 742023**  
Component  
**Bogie/Center Axle**  
Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP439702</b>	VCP411614	VCP396681
Sample Date		Client Info		<b>02 Apr 2024</b>	11 Sep 2023	08 Mar 2023
Machine Age	hrs	Client Info		<b>9289</b>	8246	7220
Oil Age	hrs	Client Info		<b>0</b>	4000	1500
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>60</b>	187	83
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	2	2
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>0</b>	0	2
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>4</b>	14	4
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>5</b>	14	9
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	2
Boron	ppm	ASTM D5185m	111	<b>164</b>	163	157
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m	0.9	<b>3</b>	2	2
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	4	1
Magnesium	ppm	ASTM D5185m	39	<b>40</b>	5	6
Calcium	ppm	ASTM D5185m	93	<b>243</b>	172	529
Phosphorus	ppm	ASTM D5185m	920	<b>1196</b>	1427	1290
Zinc	ppm	ASTM D5185m	104	<b>147</b>	86	251
Sulfur	ppm	ASTM D5185m	20179	<b>28311</b>	28304	25142
Visc @ 40°C	cSt	ASTM D445	333	<b>243</b>	143	110

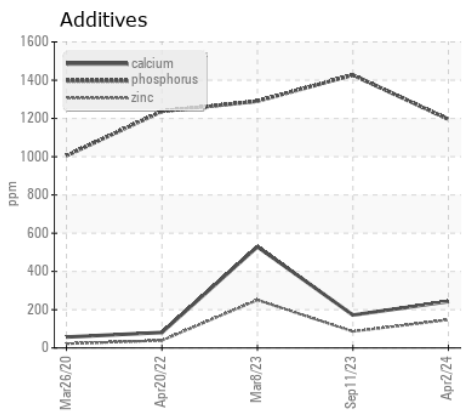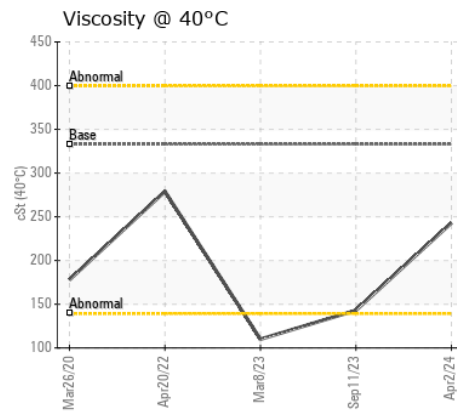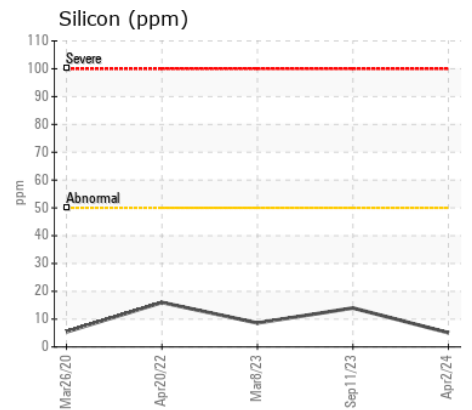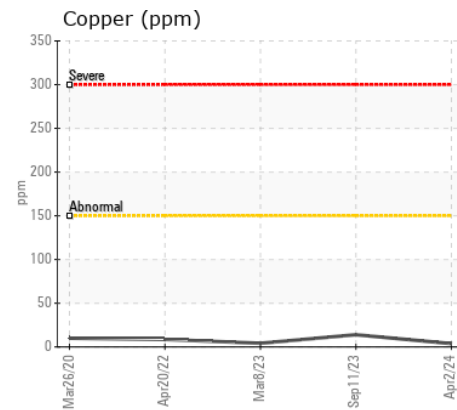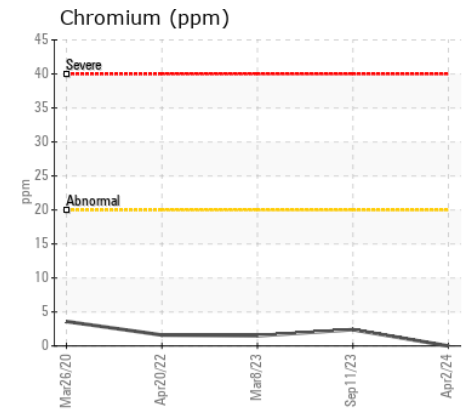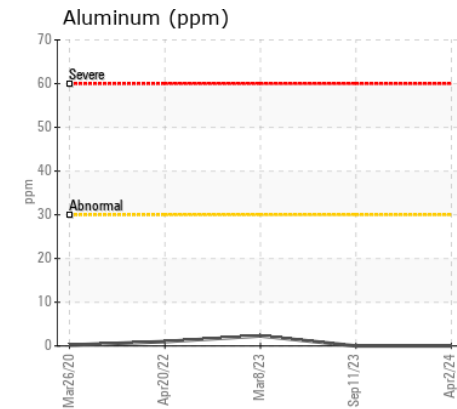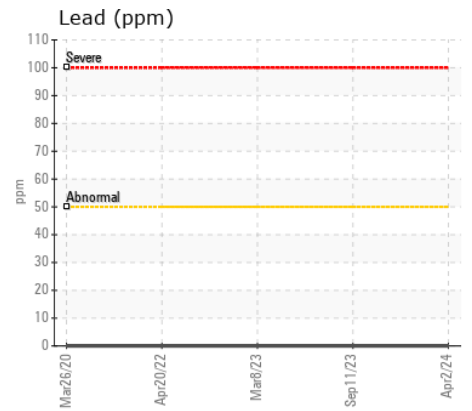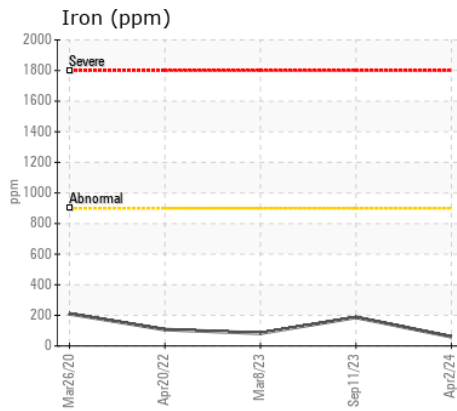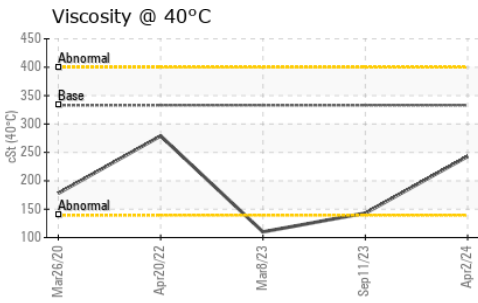

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP439702  
**Lab Number** : 06194361  
**Unique Number** : 11056484  
**Test Package** : MOB 1

**Received** : 29 May 2024  
**Tested** : 31 May 2024  
**Diagnosed** : 31 May 2024 - Wes Davis

**RIPA AND ASSOCIATES**  
 10149 FISHER AVENUE  
 TAMPA, FL  
 US 33619

Contact: PM Services  
 PMServices@ripaconstruction.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: