



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A25G 752045
Component
Front Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP447759	VCP387145	VCP320475
Sample Date		Client Info		21 May 2024	15 Sep 2023	25 Aug 2021
Machine Age	hrs	Client Info		4514	3862	1613
Oil Age	hrs	Client Info		0	0	1613
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	N/A	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	154	142	295
Chromium	ppm	ASTM D5185m	>20	2	2	6
Nickel	ppm	ASTM D5185m	>10	0	2	4
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	4
Aluminum	ppm	ASTM D5185m	>30	0	<1	0
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	15	13	34
Tin	ppm	ASTM D5185m	>20	<1	<1	1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	4	4
Potassium	ppm	ASTM D5185m	>20	0	3	5
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	4	5
Boron	ppm	ASTM D5185m	111	191	194	167
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.9	4	5	5
Manganese	ppm	ASTM D5185m	0.0	5	5	15
Magnesium	ppm	ASTM D5185m	39	21	25	2
Calcium	ppm	ASTM D5185m	93	112	110	215
Phosphorus	ppm	ASTM D5185m	920	1150	1043	1300
Zinc	ppm	ASTM D5185m	104	61	81	94
Sulfur	ppm	ASTM D5185m	20179	31248	31102	20783
Visc @ 40°C	cSt	ASTM D445	333	207	207	59.4

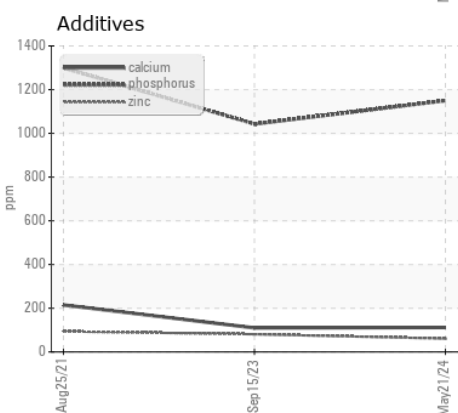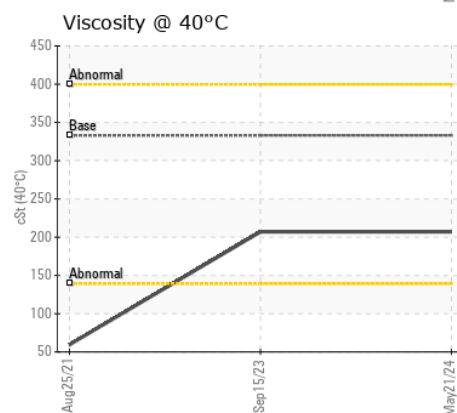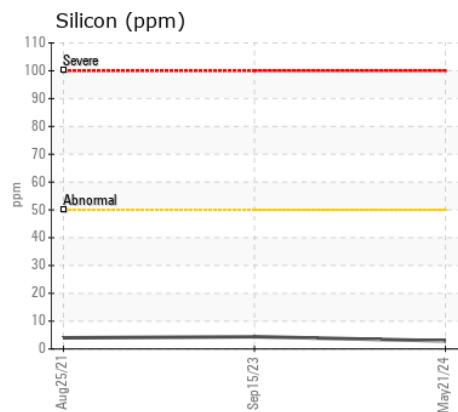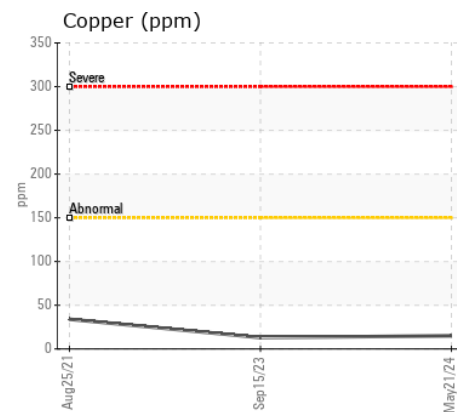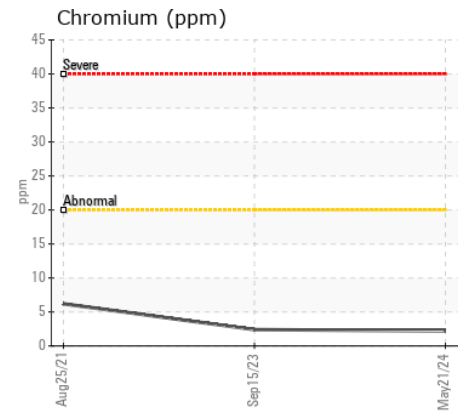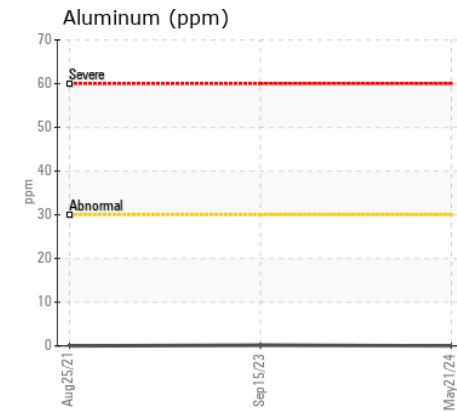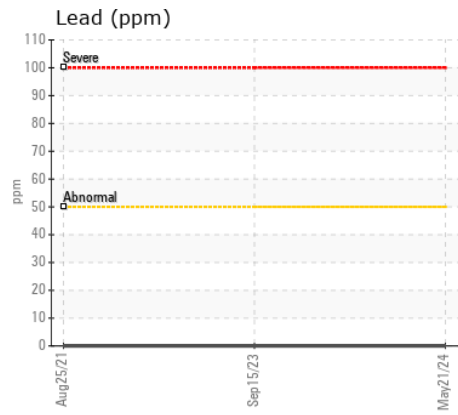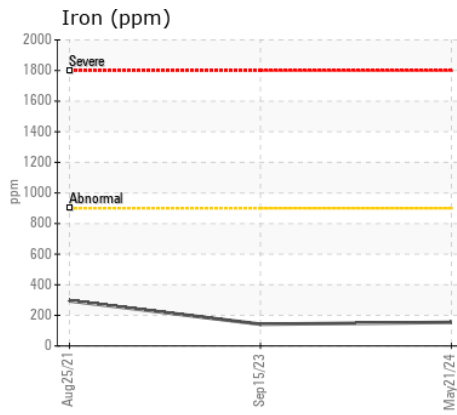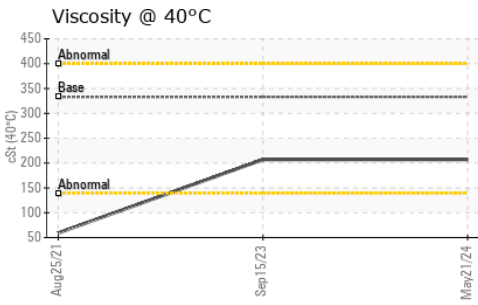

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP447759
Lab Number : 06194404
Unique Number : 11056527
Test Package : MOB 1

Received : 29 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Wes Davis

ALTA EQUIPMENT COMPANY
 5151 DR MARTIN LUTHER KING BLVD
 FORT MYERS, FL
 US 33905
 Contact: TODD LARK
 tlark@altaequipfl.com
 T:
 F: (239)481-3302

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)