



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO EC250EL 314172
Component
Rear Left Final Drive
Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP438766	VCP407146	---
Sample Date		Client Info		14 May 2024	02 Oct 2023	---
Machine Age	hrs	Client Info		3232	2232	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	93	318	---
Chromium	ppm	ASTM D5185m	>10	4	5	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	0	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>50	0	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	7	11	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	---
Boron	ppm	ASTM D5185m	379	253	59	---
Barium	ppm	ASTM D5185m	0.0	0	3	---
Molybdenum	ppm	ASTM D5185m	0.8	0	1	---
Manganese	ppm	ASTM D5185m	0.0	<1	4	---
Magnesium	ppm	ASTM D5185m	31	0	0	---
Calcium	ppm	ASTM D5185m	38	62	8	---
Phosphorus	ppm	ASTM D5185m	1077	2072	1537	---
Zinc	ppm	ASTM D5185m	46	13	15	---
Sulfur	ppm	ASTM D5185m	23526	30658	17760	---
Visc @ 40°C	cSt	ASTM D445	139	141	149	---

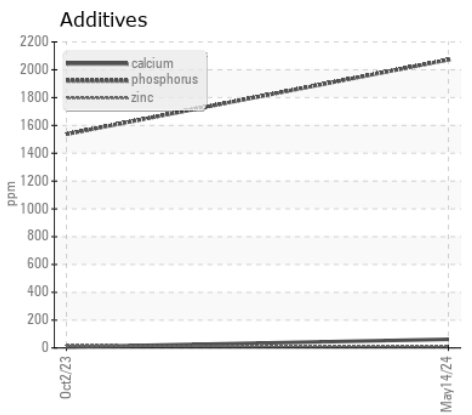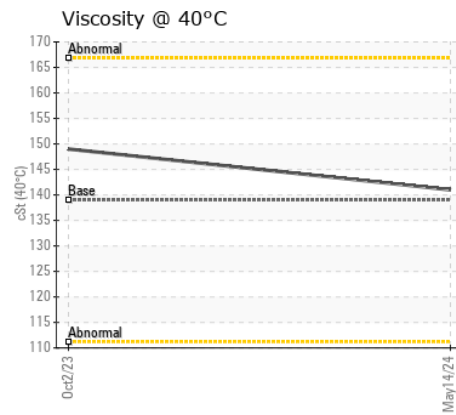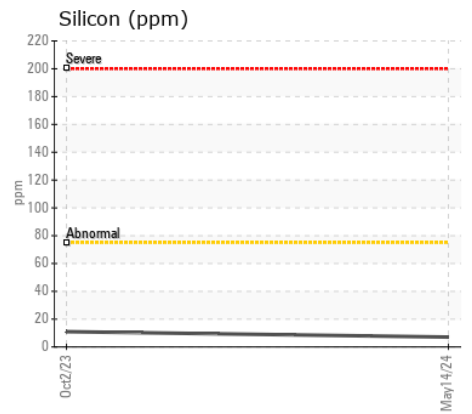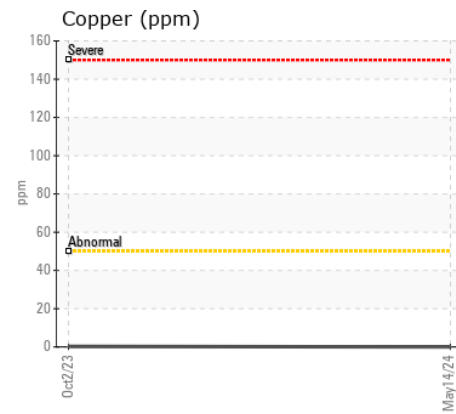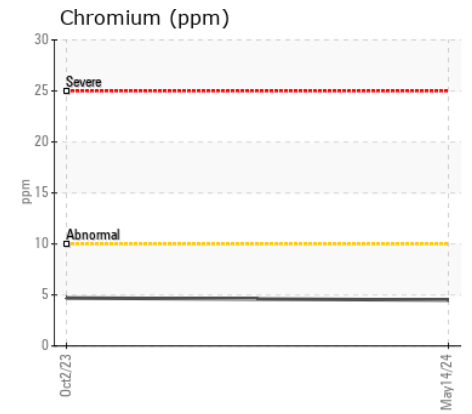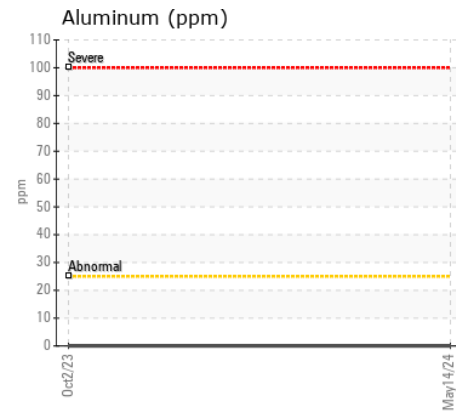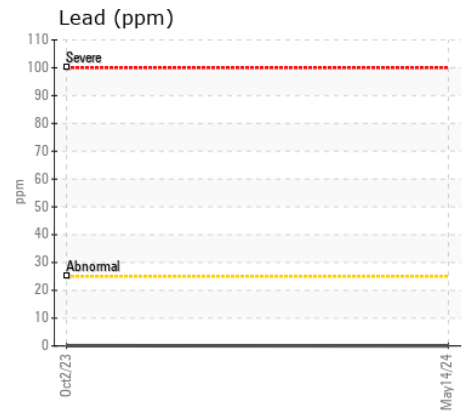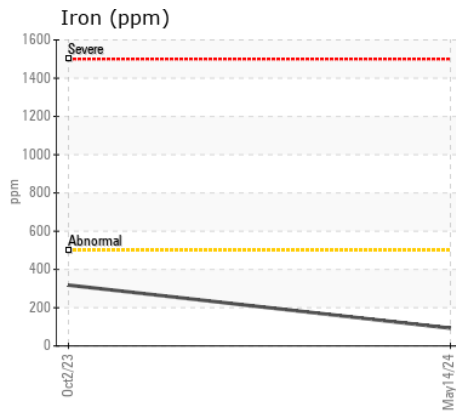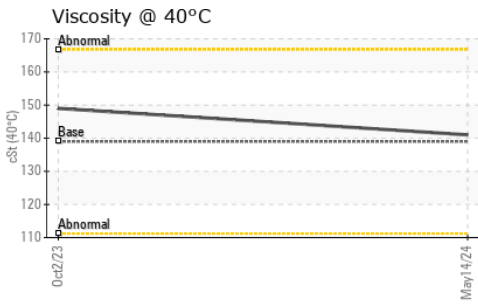

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP438766 **Received** : 29 May 2024
Lab Number : 06194407 **Tested** : 31 May 2024
Unique Number : 11056530 **Diagnosed** : 31 May 2024 - Don Baldrige
Test Package : MOB 1

CITY CARTING
 221 OLD GATE LN
 MILFORD, CT
 US 06460
 Contact: TAVINS BANKS
 tavins@citycart.net
 T: (203)223-3885
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)