



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L90H 626609
Component
Rear Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP450596	VCP441182	---
Sample Date		Client Info		20 May 2024	24 Jan 2024	---
Machine Age	hrs	Client Info		2388	1465	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>300	32	42	---
Chromium	ppm	ASTM D5185m	>10	<1	2	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>15	0	2	---
Lead	ppm	ASTM D5185m	>4	0	0	---
Copper	ppm	ASTM D5185m	>200	6	<1	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	16	---
Potassium	ppm	ASTM D5185m	>20	0	3	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	1	---
Boron	ppm	ASTM D5185m		166	140	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		<1	20	---
Manganese	ppm	ASTM D5185m		2	8	---
Magnesium	ppm	ASTM D5185m		23	11	---
Calcium	ppm	ASTM D5185m		4186	3832	---
Phosphorus	ppm	ASTM D5185m		1398	1347	---
Zinc	ppm	ASTM D5185m		1671	1596	---
Sulfur	ppm	ASTM D5185m		5298	5929	---
Visc @ 40°C	cSt	ASTM D445	55	43.6	41.2	---

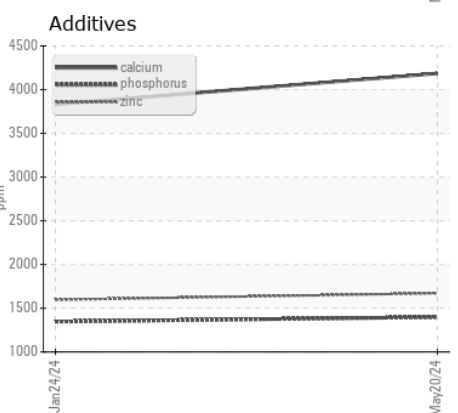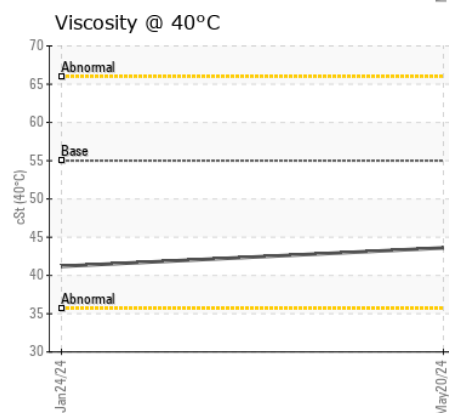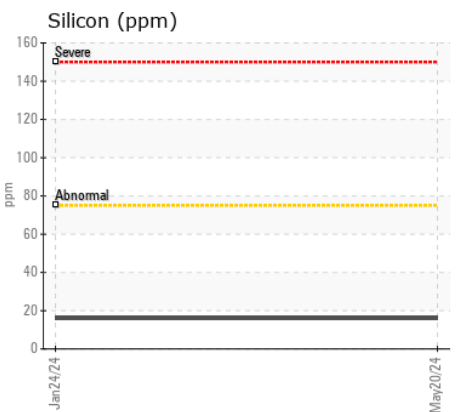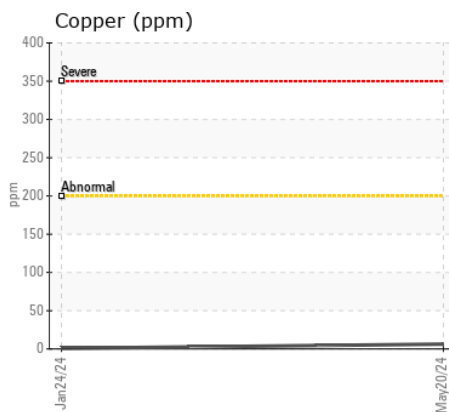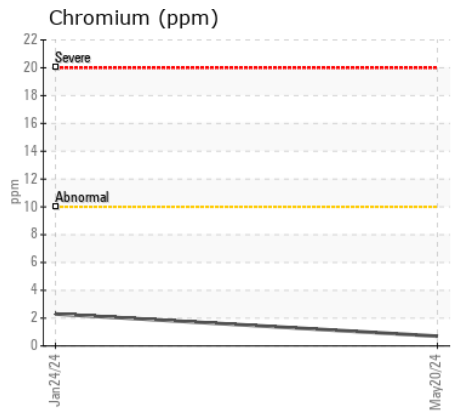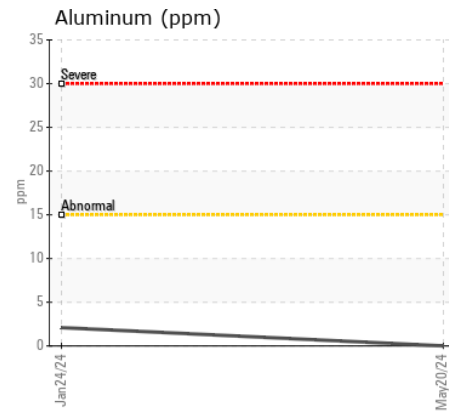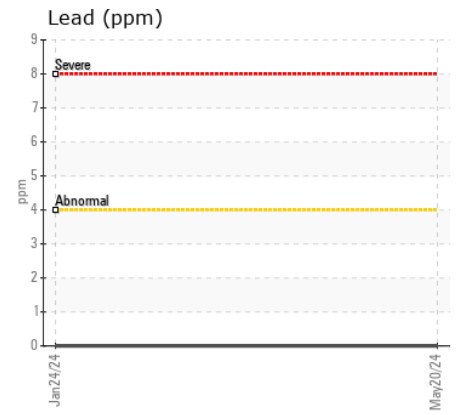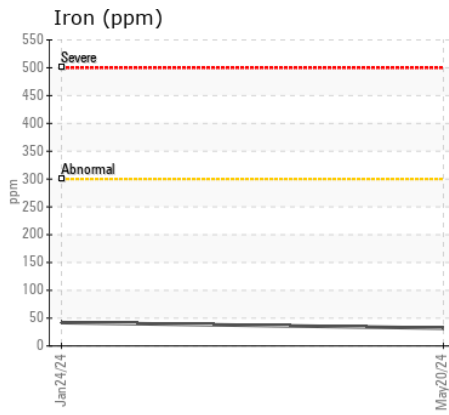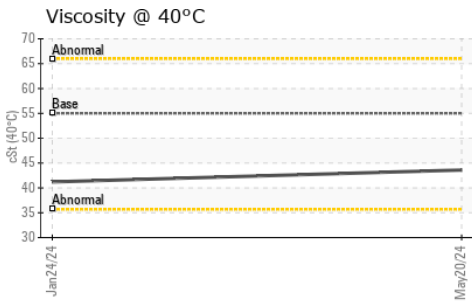

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP450596
Lab Number : 06194412
Unique Number : 11056535
Test Package : MOB 1

Received : 29 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Wes Davis

ALTA EQUIPMENT COMPANY
 5151 DR MARTIN LUTHER KING BLVD
 FORT MYERS, FL
 US 33905
 Contact: TODD LARK
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (239)481-3302