



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
KOMATSU HM300 HM300-3 (S/N 2079)
 Component
Left Final Drive
 Fluid
SAE 50W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TLY0002502	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		11068	---	---
Oil Age	hrs	Client Info		10642	---	---
Filter Age	hrs	Client Info		10642	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	313	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	4	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>50	18	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	29	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		13	---	---
Boron	ppm	ASTM D5185m		69	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		25	---	---
Calcium	ppm	ASTM D5185m		3172	---	---
Phosphorus	ppm	ASTM D5185m		951	---	---
Zinc	ppm	ASTM D5185m		1174	---	---
Sulfur	ppm	ASTM D5185m		7104	---	---
Visc @ 40°C	cSt	ASTM D445	215	54.8	---	---

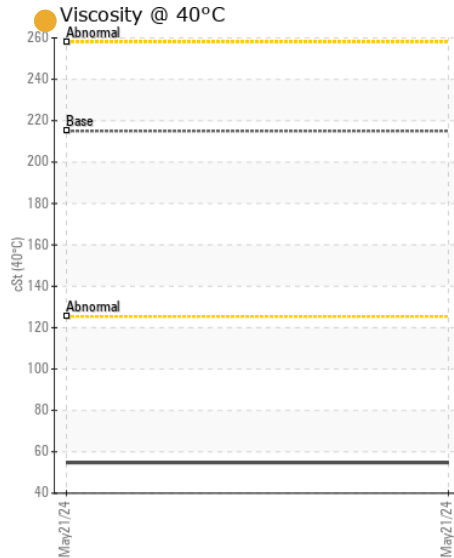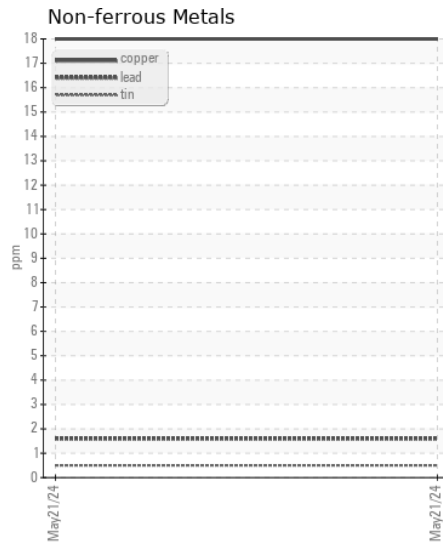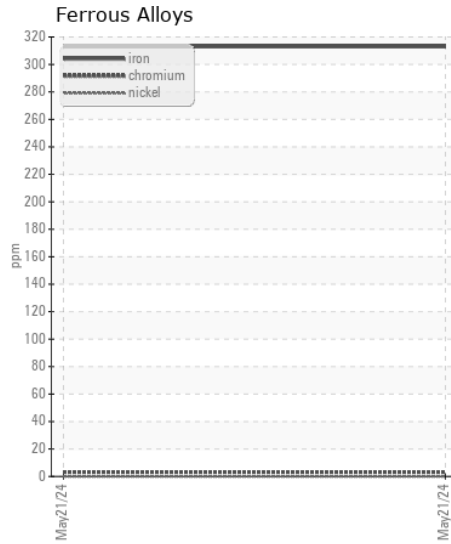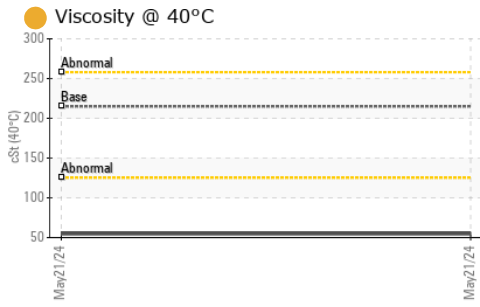

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLY0002502
Lab Number : 06194431
Unique Number : 11056554
Test Package : CONST

Received : 29 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Sean Felton

GAINES & COMPANY
 112 WESTMINSTER RD
 REISTERSTOWN, MD
 US 21136

Contact: BRANDY BADING
bbading@gainesandco.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: