



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
731119
 Component
Transmission (Auto)
 Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0120144	GFL0103358	GFL0083731
Sample Date		Client Info		24 May 2024	21 Dec 2023	06 Jun 2023
Machine Age	hrs	Client Info		7526	6906	5704
Oil Age	hrs	Client Info		0	6906	5704
Filter Age	hrs	Client Info		1200	1200	1200
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	135	118	127
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>50	56	47	54
Lead	ppm	ASTM D5185m	>50	8	6	8
Copper	ppm	ASTM D5185m	>225	48	43	48
Tin	ppm	ASTM D5185m	>10	10	7	10
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	8	6	6
Potassium	ppm	ASTM D5185m	>20	5	1	4
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		17	11	10
Boron	ppm	ASTM D5185m		74	70	82
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		2	<1	<1
Manganese	ppm	ASTM D5185m		3	2	3
Magnesium	ppm	ASTM D5185m		11	8	1
Calcium	ppm	ASTM D5185m		105	85	63
Phosphorus	ppm	ASTM D5185m		260	225	251
Zinc	ppm	ASTM D5185m		25	19	5
Sulfur	ppm	ASTM D5185m		1146	907	1103
Visc @ 40°C	cSt	ASTM D445	34	30.3	34.96	35.0

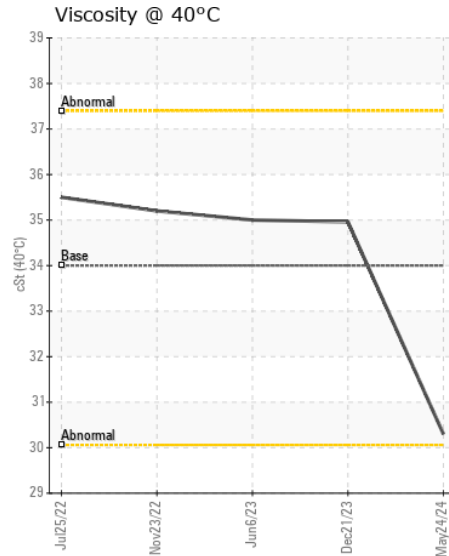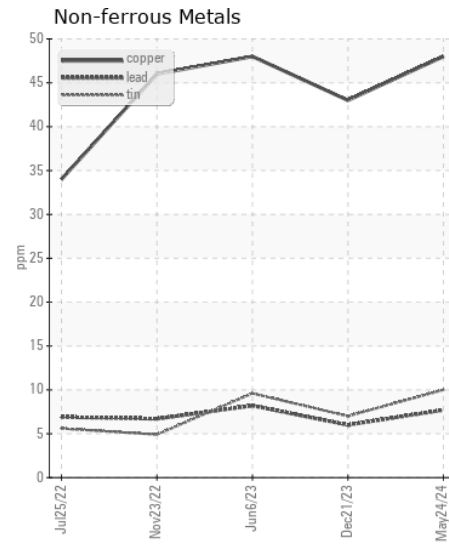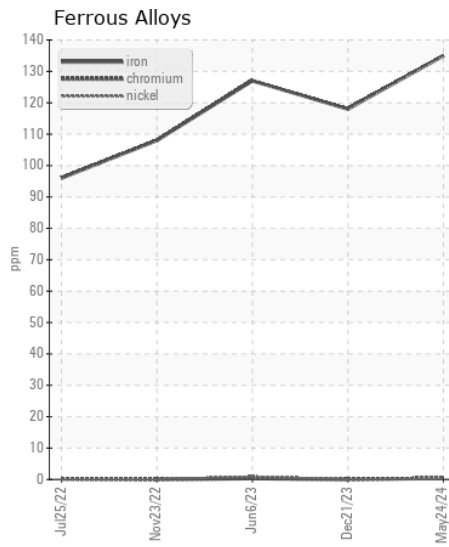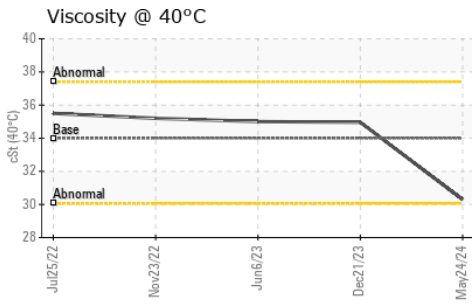

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0120144
Lab Number : 06194473
Unique Number : 11056596
Test Package : FLEET

Received : 29 May 2024
Tested : 30 May 2024
Diagnosed : 31 May 2024 - Sean Felton

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: