



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A35G 342019
Component
Transmission (Auto)
Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001816	ML0000558	VCP388472
Sample Date		Client Info		23 May 2024	21 Mar 2024	17 Oct 2022
Machine Age	hrs	Client Info		8637	8225	0
Oil Age	hrs	Client Info		412	3755	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	12	26	21
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	3	1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>50	8	15	12
Lead	ppm	ASTM D5185m	>50	<1	1	0
Copper	ppm	ASTM D5185m	>225	8	19	14
Tin	ppm	ASTM D5185m	>10	2	4	3
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	3	4	4
Potassium	ppm	ASTM D5185m	>20	2	3	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	0	2
Boron	ppm	ASTM D5185m	187	111	113	95
Barium	ppm	ASTM D5185m	0.0	0	1	0
Molybdenum	ppm	ASTM D5185m	0.0	0	1	<1
Manganese	ppm	ASTM D5185m	0.0	<1	1	<1
Magnesium	ppm	ASTM D5185m	6.8	<1	4	1
Calcium	ppm	ASTM D5185m	215	122	158	88
Phosphorus	ppm	ASTM D5185m	445	283	231	205
Zinc	ppm	ASTM D5185m	56	4	26	10
Sulfur	ppm	ASTM D5185m	1336	2207	2032	2414
Visc @ 40°C	cSt	ASTM D445	35.3	29.7	28.2	28.28

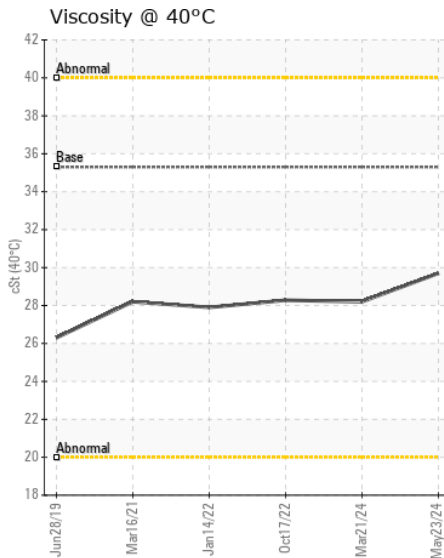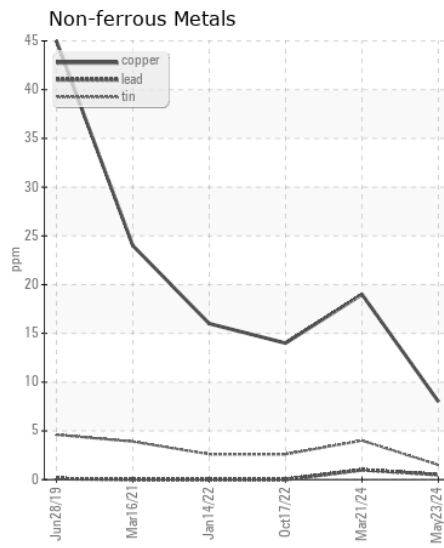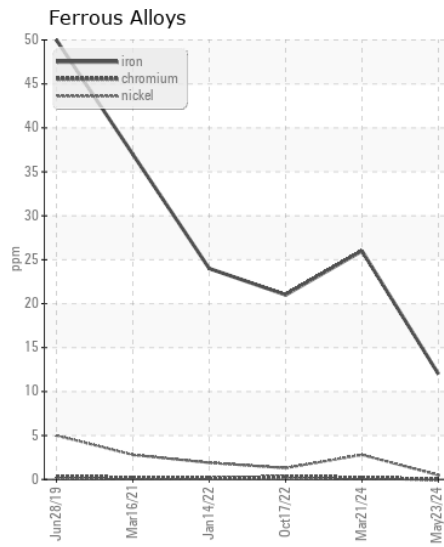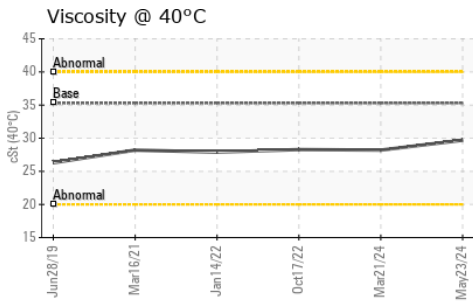

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001816
Lab Number : 06194481
Unique Number : 11056604
Test Package : CONST

Received : 29 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Sean Felton

MCCLUNG-LOGAN EQUIPMENT CO - RICHMOND
 1345 MOUNTAIN ROAD
 GLEN ALLEN, VA
 US 23060
 Contact: KYLE RATLIFFE
 KRATLIFFE@MCCLUNG-LOGAN.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (804)266-1611