



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FALK MISS KATHY
Component
Port Reduction Gear
Fluid
CHEVRON GEAR COMPOUND EP 220 (135 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0044124	MW0044116	MW0044205
Sample Date		Client Info		22 Mar 2024	01 Feb 2024	05 Dec 2023
Machine Age	hrs	Client Info		6322	48649	0
Oil Age	hrs	Client Info		6322	48649	0
Filter Age	hrs	Client Info		6322	450	373
Oil Changed		Client Info		Not Changd	Not Changd	N/A
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	20	16	18
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	<1	<1
Lead	ppm	ASTM D5185m	>100	<1	<1	<1
Copper	ppm	ASTM D5185m	>50	7	5	6
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	1	1
Potassium	ppm	ASTM D5185m	>20	2	2	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	<1	2
Boron	ppm	ASTM D5185m		6	8	8
Barium	ppm	ASTM D5185m		1	5	0
Molybdenum	ppm	ASTM D5185m		1	2	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		<1	6	1
Calcium	ppm	ASTM D5185m		16	20	19
Phosphorus	ppm	ASTM D5185m		270	223	264
Zinc	ppm	ASTM D5185m		3	0	0
Sulfur	ppm	ASTM D5185m		6350	5751	6383
Acid Number (AN)	mg KOH/g	ASTM D8045		0.57	0.53	0.532
Visc @ 40°C	cSt	ASTM D445	209	226	225	223

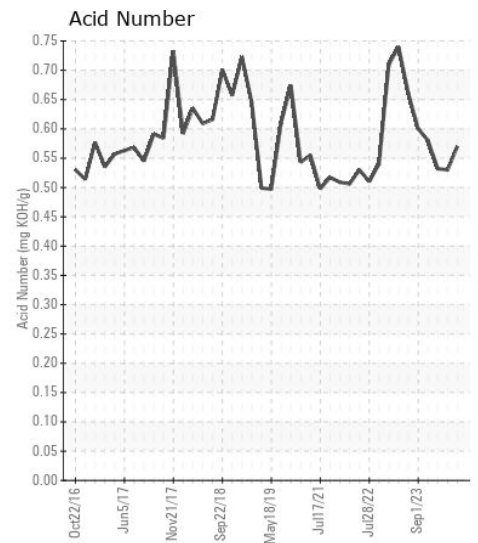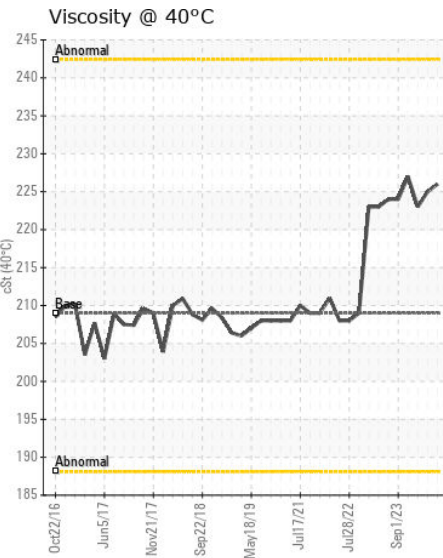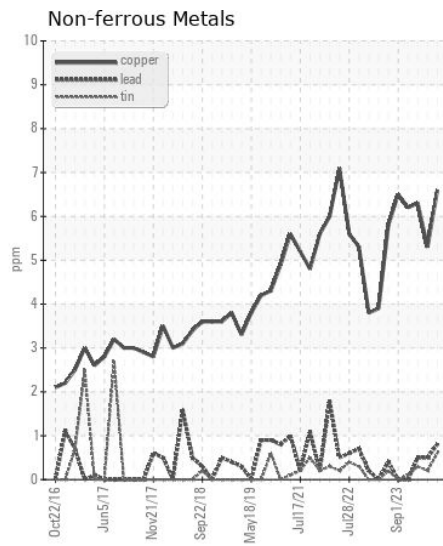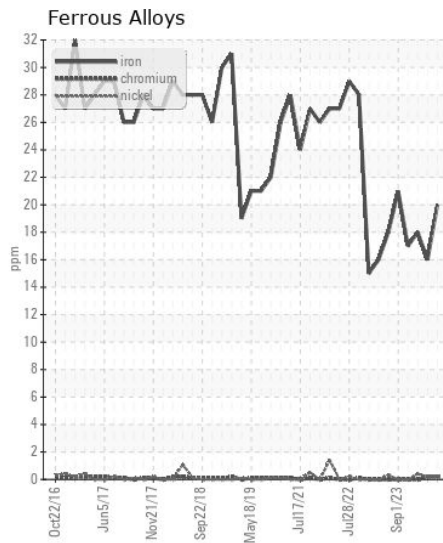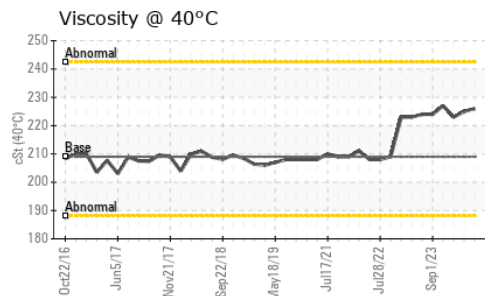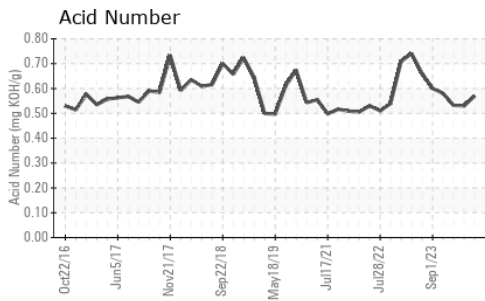

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0044124
Lab Number : 06194682
Unique Number : 11056805
Test Package : MAR 2

Received : 29 May 2024
Tested : 31 May 2024
Diagnosed : 31 May 2024 - Wes Davis

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: (601)638-8028