



WEAR	ATTENTION
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 700L 1T0700LXANF433074
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (12 QTS)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0217932	---	---
Sample Date		Client Info		28 May 2024	---	---
Machine Age	hrs	Client Info		2148	---	---
Oil Age	hrs	Client Info		2148	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	98	---	---
Iron	ppm	ASTM D5185m	>750	467	---	---
Chromium	ppm	ASTM D5185m	>9	11	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	29	---	---
Lead	ppm	ASTM D5185m	>15	1	---	---
Copper	ppm	ASTM D5185m	>40	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	107	---	---
Potassium	ppm	ASTM D5185m	>20	9	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	4	---	---
Boron	ppm	ASTM D5185m	6	<1	---	---
Barium	ppm	ASTM D5185m	0	2	---	---
Molybdenum	ppm	ASTM D5185m	0	8	---	---
Manganese	ppm	ASTM D5185m		8	---	---
Magnesium	ppm	ASTM D5185m	145	103	---	---
Calcium	ppm	ASTM D5185m	3570	3481	---	---
Phosphorus	ppm	ASTM D5185m	1290	1088	---	---
Zinc	ppm	ASTM D5185m	1640	1197	---	---
Sulfur	ppm	ASTM D5185m		3806	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	49.3	---	---

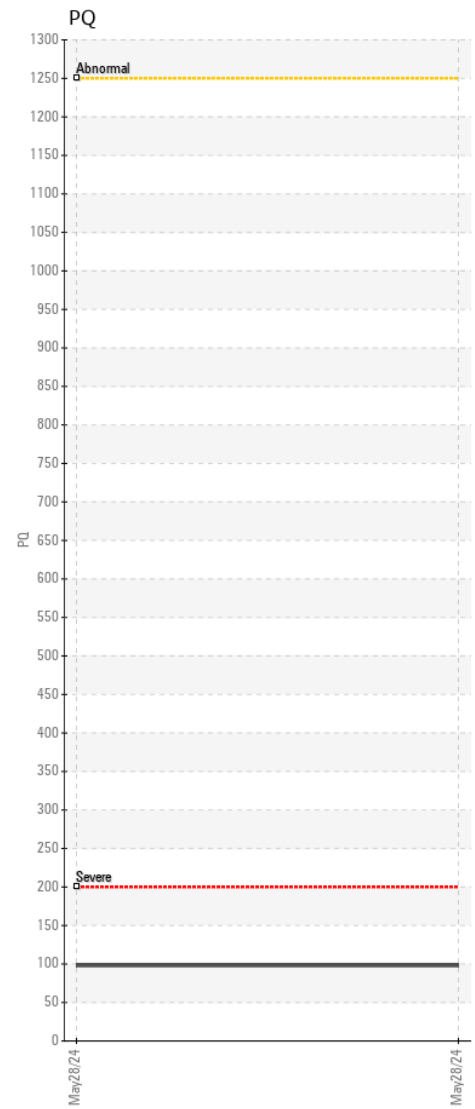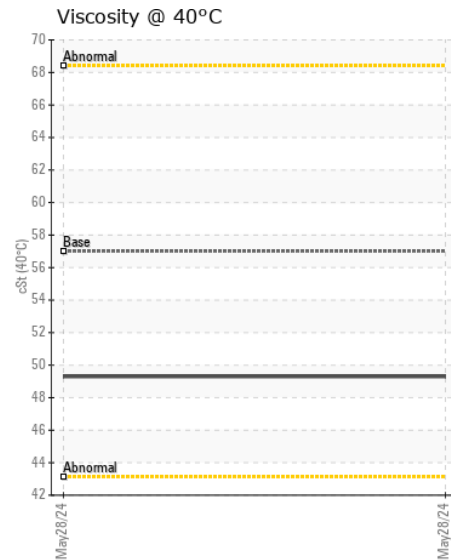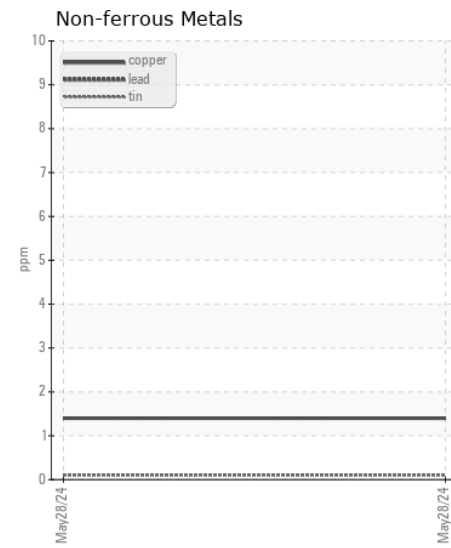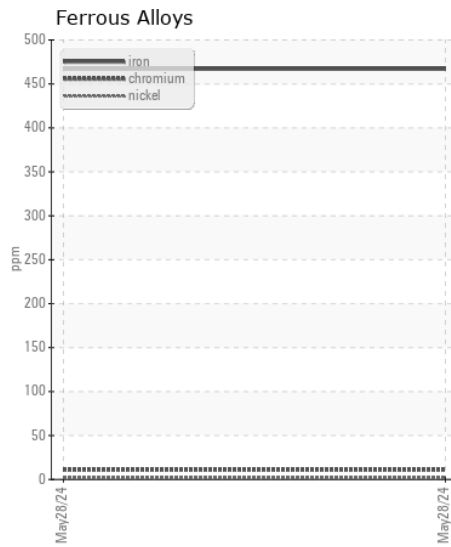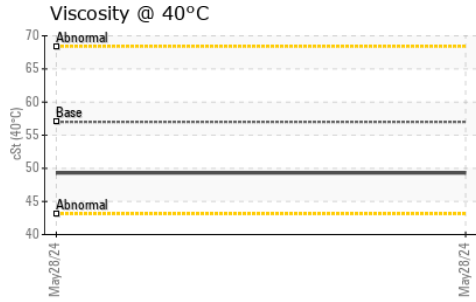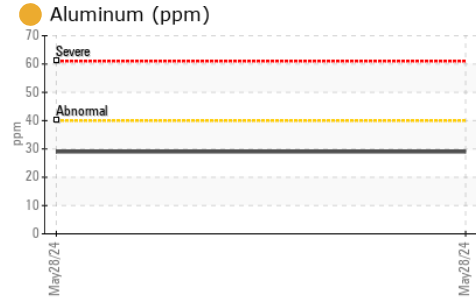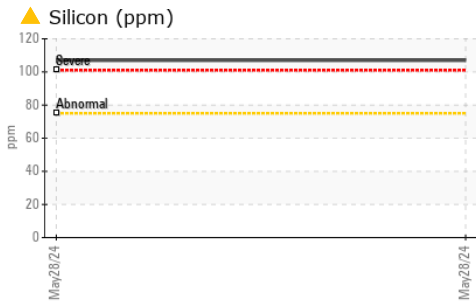

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0217932 **Received** : 29 May 2024
Lab Number : 06194726 **Tested** : 31 May 2024
Unique Number : 11056849 **Diagnosed** : 31 May 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com

T: (703)631-8500

F: (703)631-4715