



WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
NORMAL
NORMAL

Area

BILL COLGROVE [6680]

Machine Id

TWIN DISC MG-5050-A 5GH287 - INBOARD

Component

Starboard Gearbox

Fluid

{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

The lead level is abnormal. All other component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION











The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA060953	---	---
Sample Date		Client Info		23 May 2024	---	---
Machine Age	hrs	Client Info		2791	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ATTENTION	---	---

PQ		ASTM D8184		40	---	---
Iron	ppm	ASTM D5185m	>200	67	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	8	---	---
Lead	ppm	ASTM D5185m	>50	67	---	---
Copper	ppm	ASTM D5185m	>200	117	---	---
Tin	ppm	ASTM D5185m	>10	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

Silicon	ppm	ASTM D5185m	>50	12	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		510	---	---
Barium	ppm	ASTM D5185m		9	---	---
Molybdenum	ppm	ASTM D5185m		50	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		15	---	---
Calcium	ppm	ASTM D5185m		3626	---	---
Phosphorus	ppm	ASTM D5185m		1160	---	---
Zinc	ppm	ASTM D5185m		1211	---	---
Sulfur	ppm	ASTM D5185m		4518	---	---
Visc @ 40°C	cSt	ASTM D445		87.4	---	---

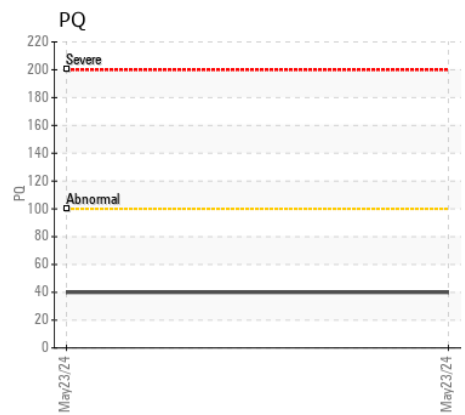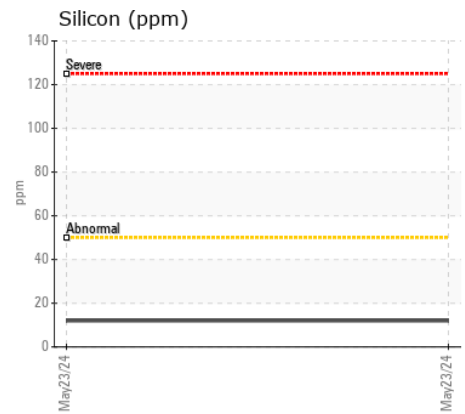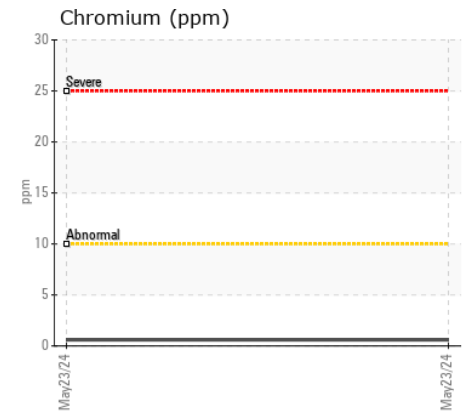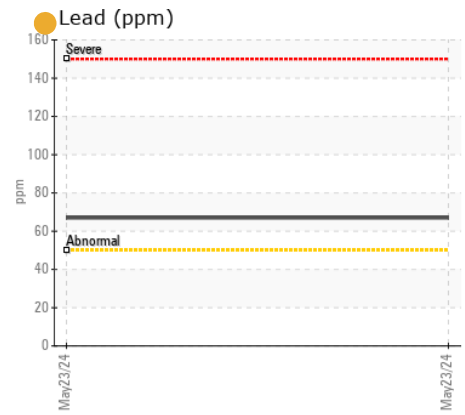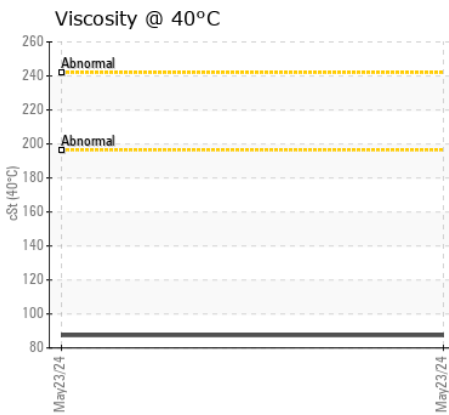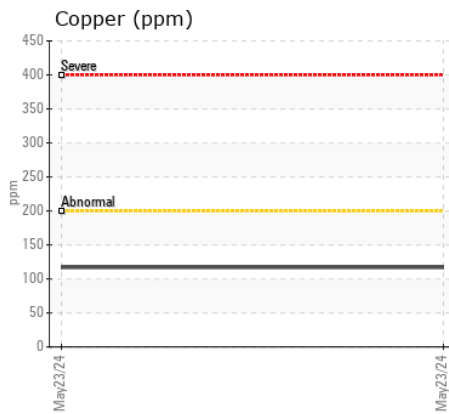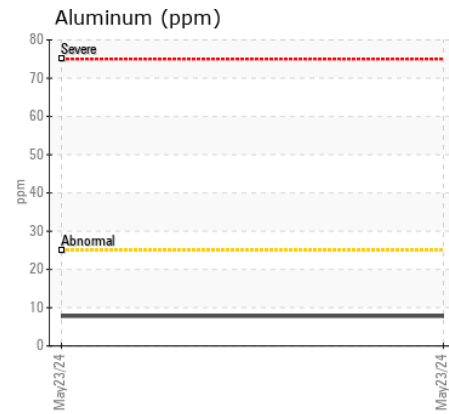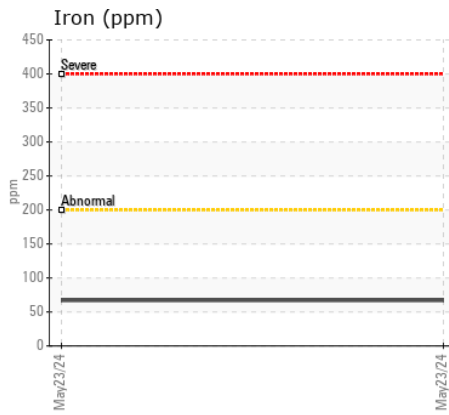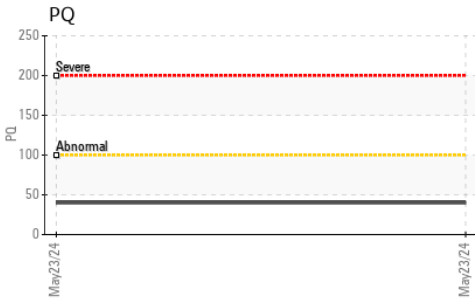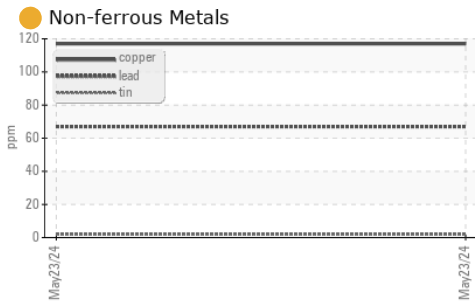

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA060953 **Received** : 29 May 2024
Lab Number : 06194732 **Tested** : 31 May 2024
Unique Number : 11056855 **Diagnosed** : 31 May 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: PQ)

Northwest Diesel Power
 1325 ROEDER AVE SUITE 103
 BELLINGHAM, WA
 US 98225
 Contact: BRANDON ROBERTSON
 parts@nwdieselpower.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: